

**AesthEdge®**  
**Solidex Wood®**



**+86 189 5395 5575**



[angela@aesthedge.com](mailto:angela@aesthedge.com)



[www.aesthedge.com](http://www.aesthedge.com)  
[www.solidexwood.com](http://www.solidexwood.com)




Rm1103, A10Building, Lushang Center, Guangzhou Road,  
Lanshan District, Linyi City, Shandong Province, China



**AesthEdge®** **SolidexWood®**



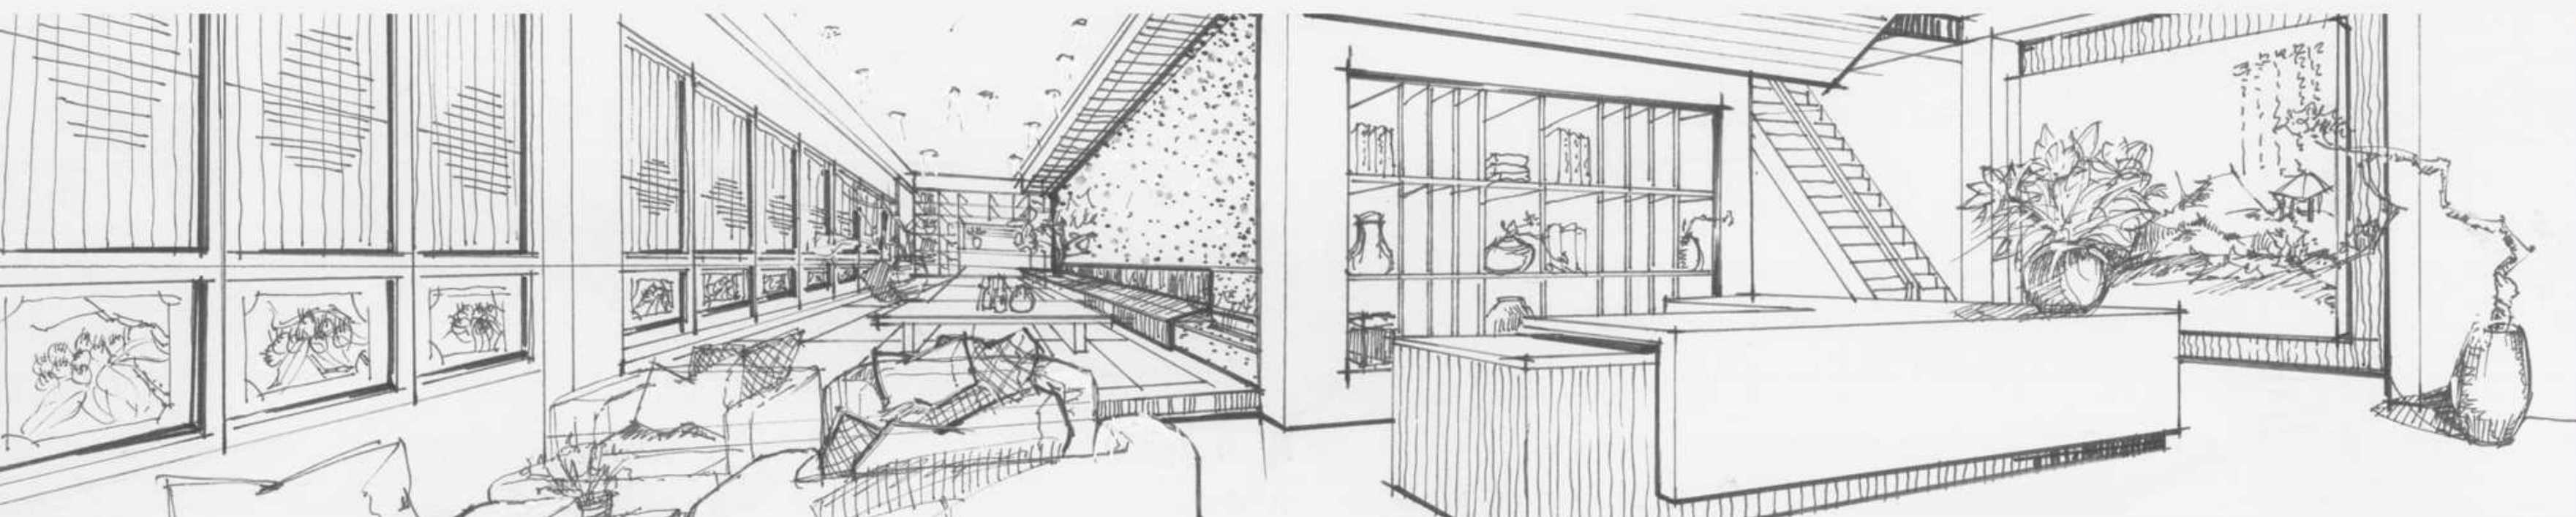

# Contents of Decor Materials

**AesthEdge®** **Solidex Wood®**



01

WPC Wall Panel  
03-13




02

WPC Ceiling  
14-16



07

Slat Acoustic Panel  
40-49



08

PU Stone Panel  
50-55



03

WPC Timber Tube  
17-19



04

Bamboo Charcoal  
Wood Veneer  
20-27



09

Composite Decking  
56-67



10

Composite Cladding  
68-76



05

PVC Marble Sheet  
28-35



06

PS Wall Panel  
36-39



11

Timber Tube  
77-78



12

Fences  
79-80



AesthEdge and SolidexWood specialize in designing, manufacturing, and distributing innovative, eco-friendly decor coverings and wall protection solutions. Our main products include WPC Panels, PVC Marble Sheets, Bamboo Charcoal Wood Veneers, PS Wall Panels, Slat Acoustic Panels, PU Stone Panels, Composite Cladding, Composite Decking, Timber Tube, Fences, and related accessories.



**SINCE 2005**

20 years exported to more than 60+countries



**60,000**

Covering a land-area of about 60,000 square meters



**35+**

A 35 person sales team and quick response



Home



Facility



Hotel



Office



Sport Area



Factory



Public Housing



School



Retail Store



Transport

## CREATING COMFORTABLE

## NATURAL AESTHETICS

Since the establishment, AesthEdge has adhered to the principles of prioritizing customers, maintaining a strong reputation, focusing on quality, and delivering exceptional service. We continually develop new materials, innovate designs, and enhance our quality management system. This enables us to provide comprehensive solutions and offer OEM and ODM services to our customers.

## WE CARE /WE ACT

Our Commitments for a Sustainable future



Using sustainable materials



Carbonfootprint  
-20 % kg



Recyclable





[www.aesthedge.com](http://www.aesthedge.com)  
[www.solidexwood.com](http://www.solidexwood.com)



# 01 WPC Wall Panel

Hot-selling product series












The WPC Wall Panel is mainly a kind of wall decoration board made of wood-plastic material. Because the cross section is like the WPCWall Panel, it is called the WPC Wall Panel.

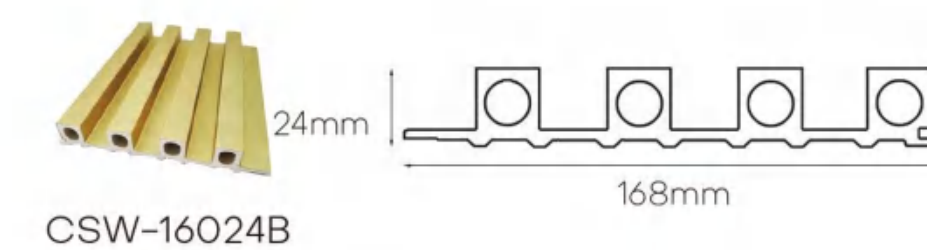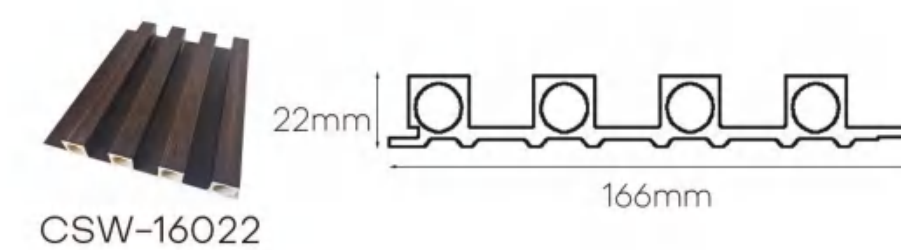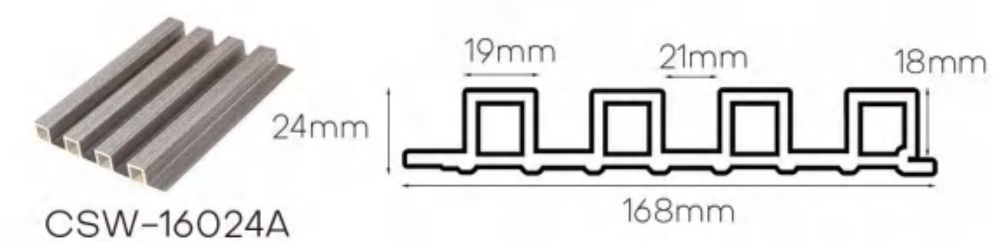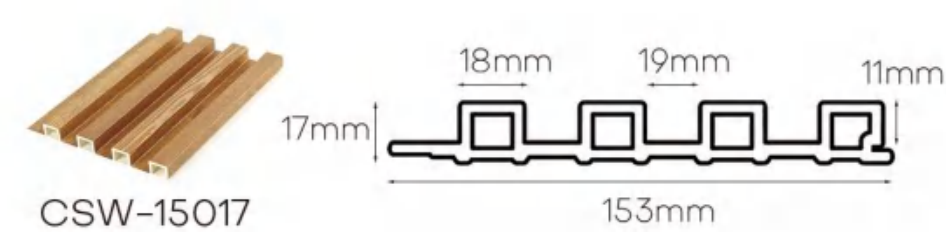



# 01 WPC Wall Panel


Hot-selling product series

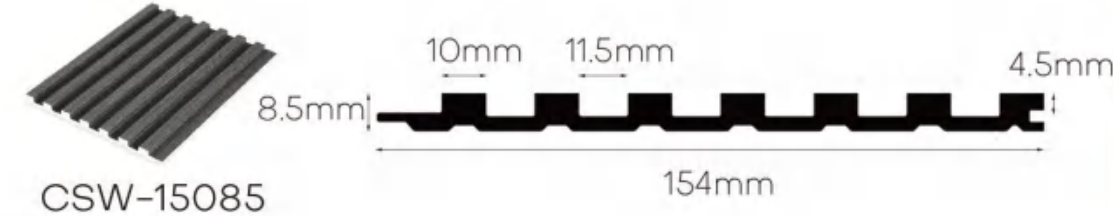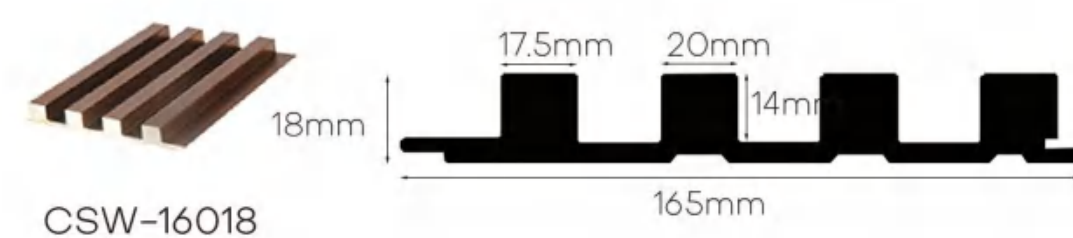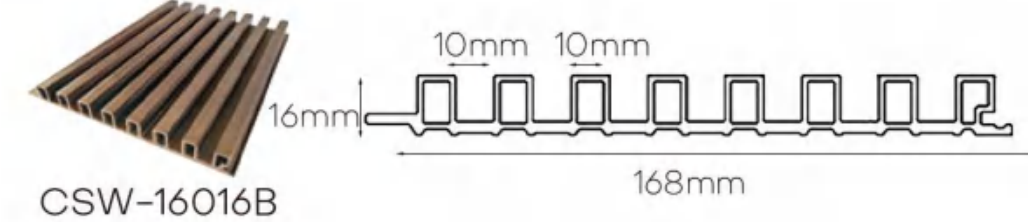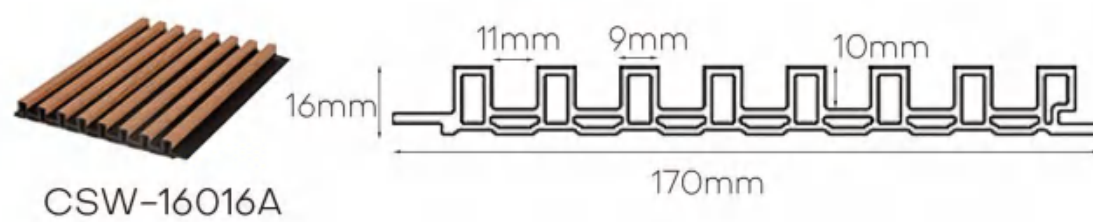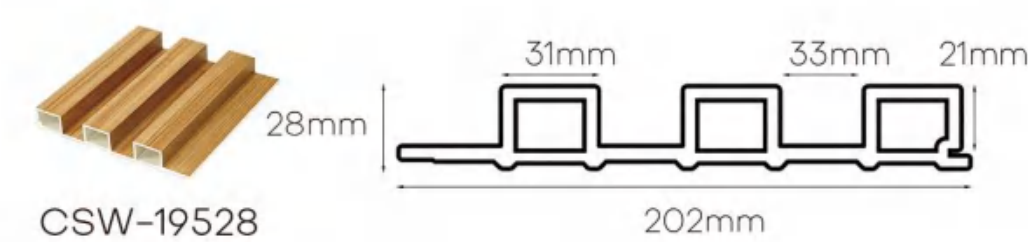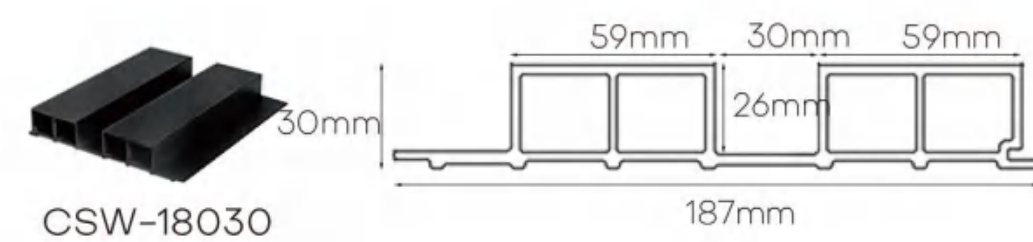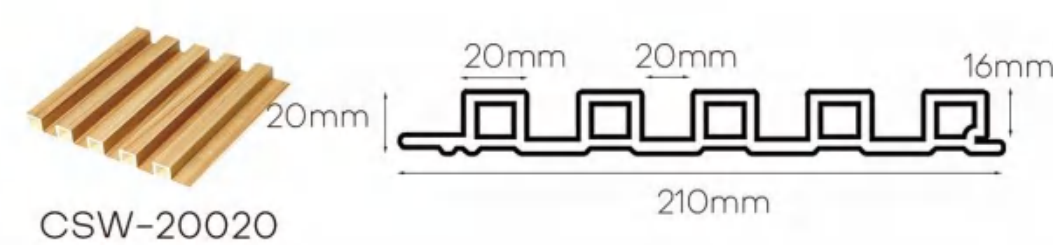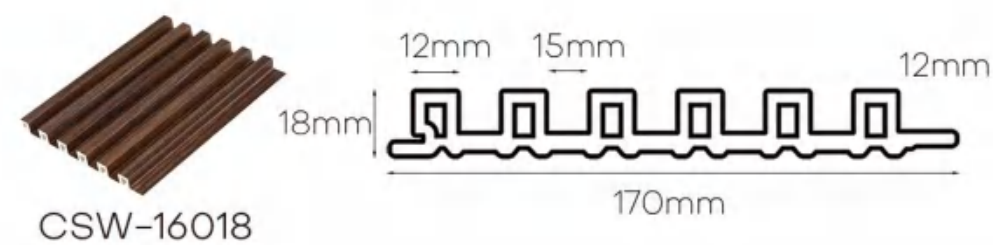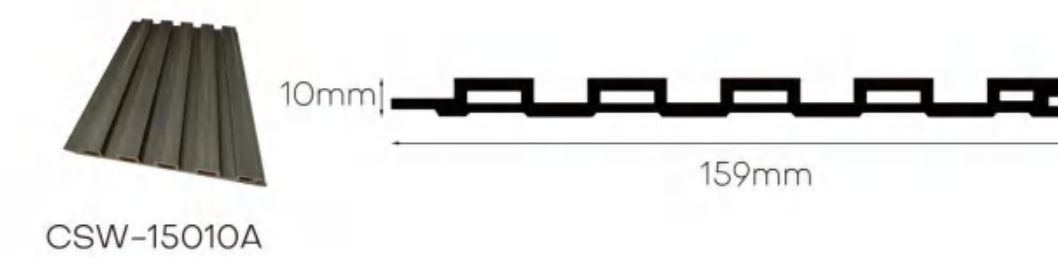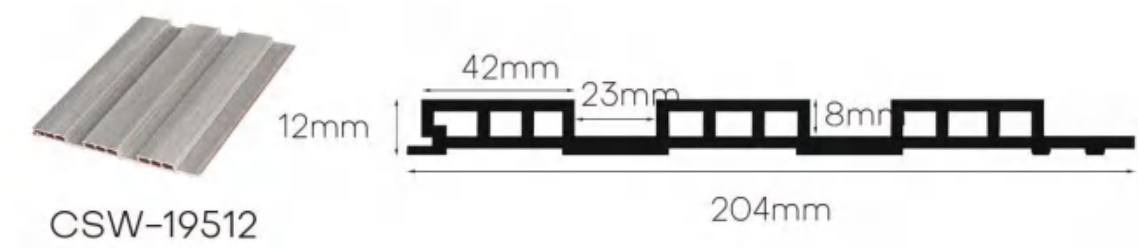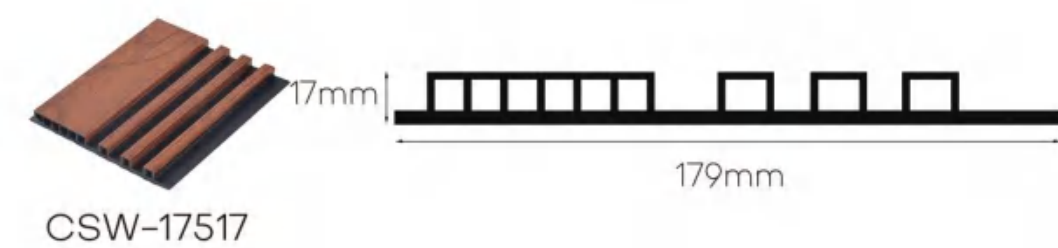



# 01 WPC Wall Panel


Hot-selling product series

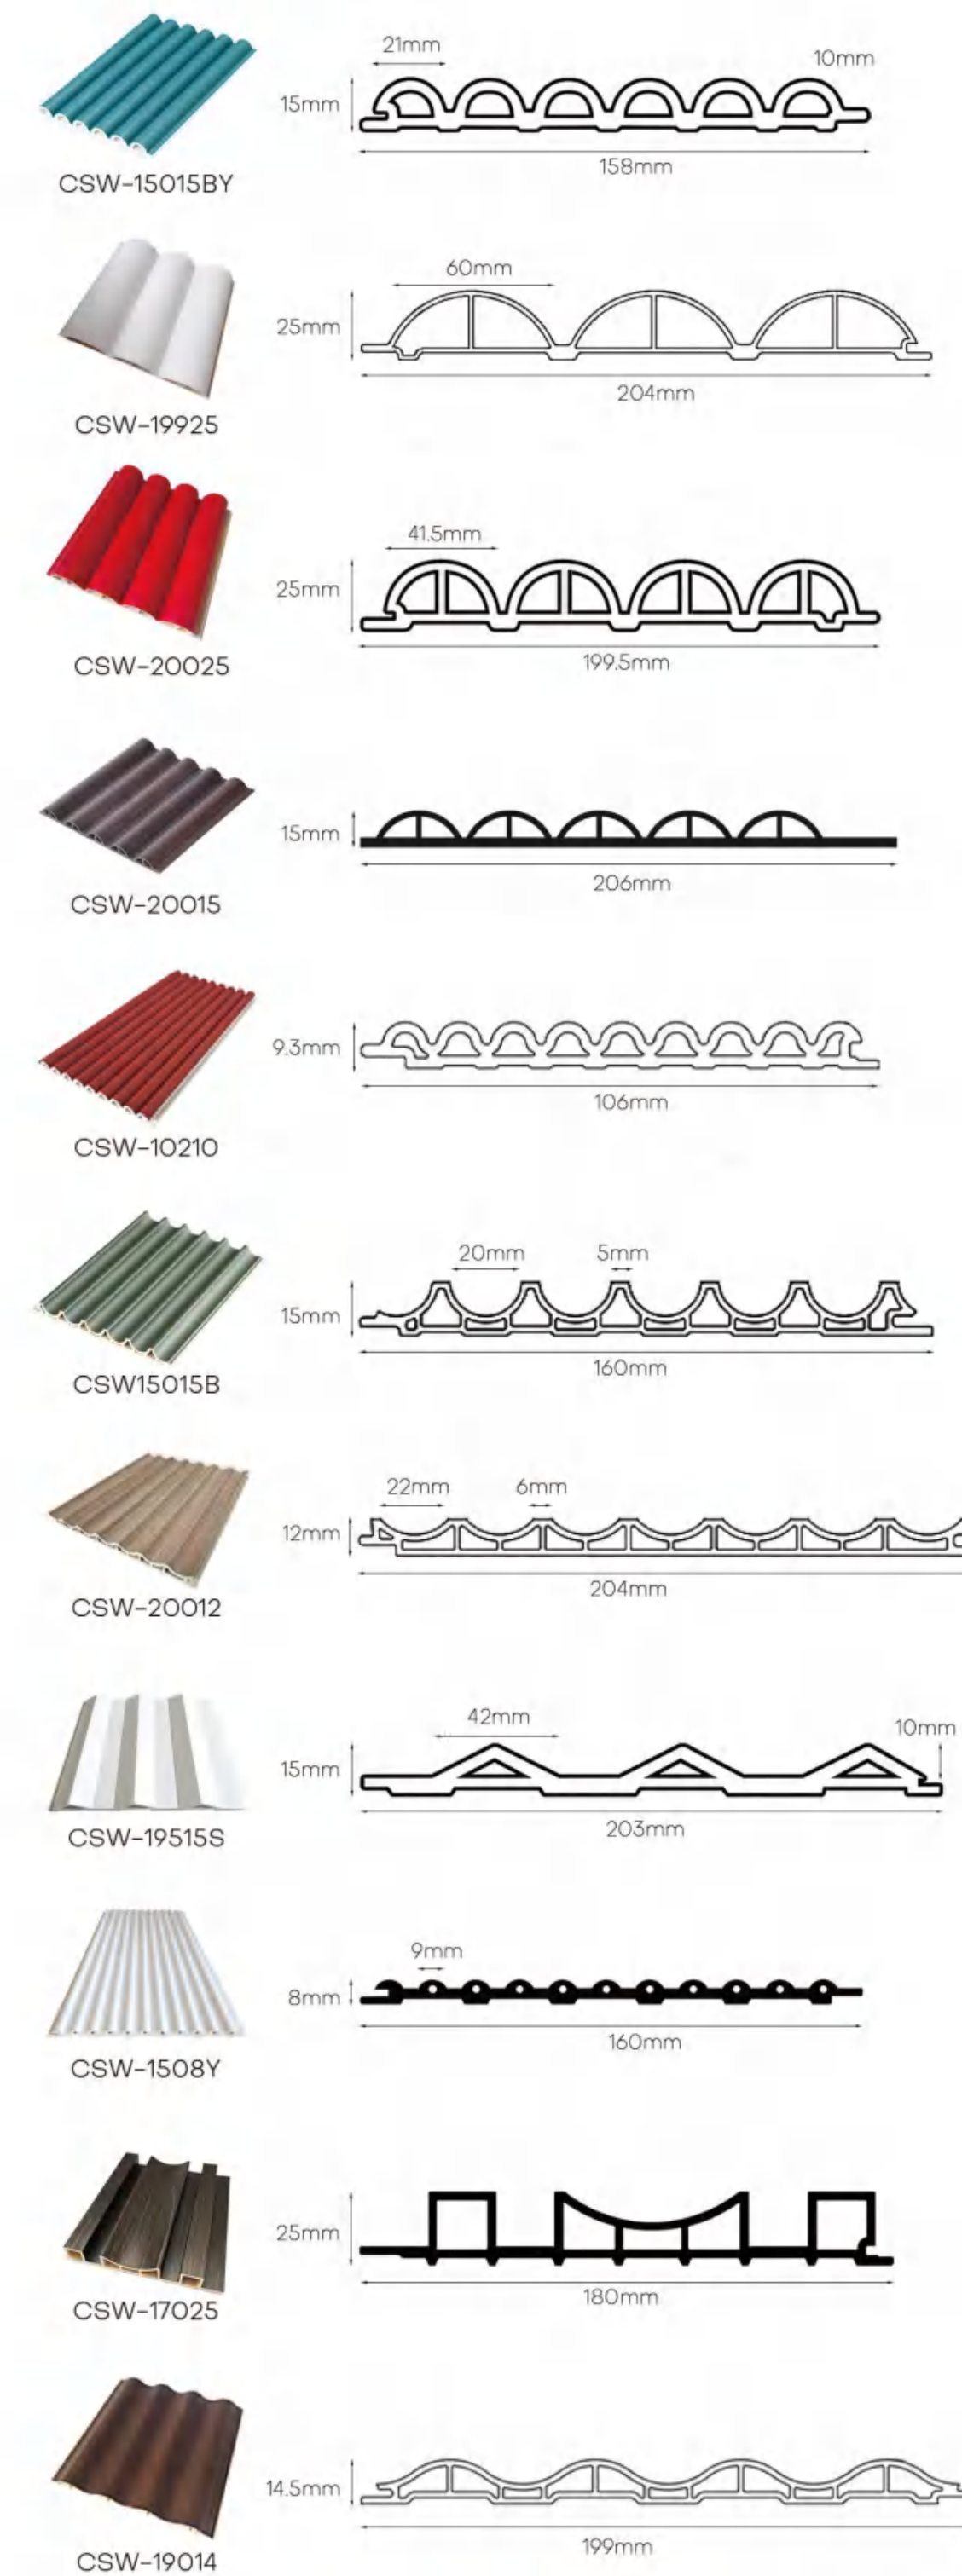



# 01 WPC Wall Panel

Hot-selling product series

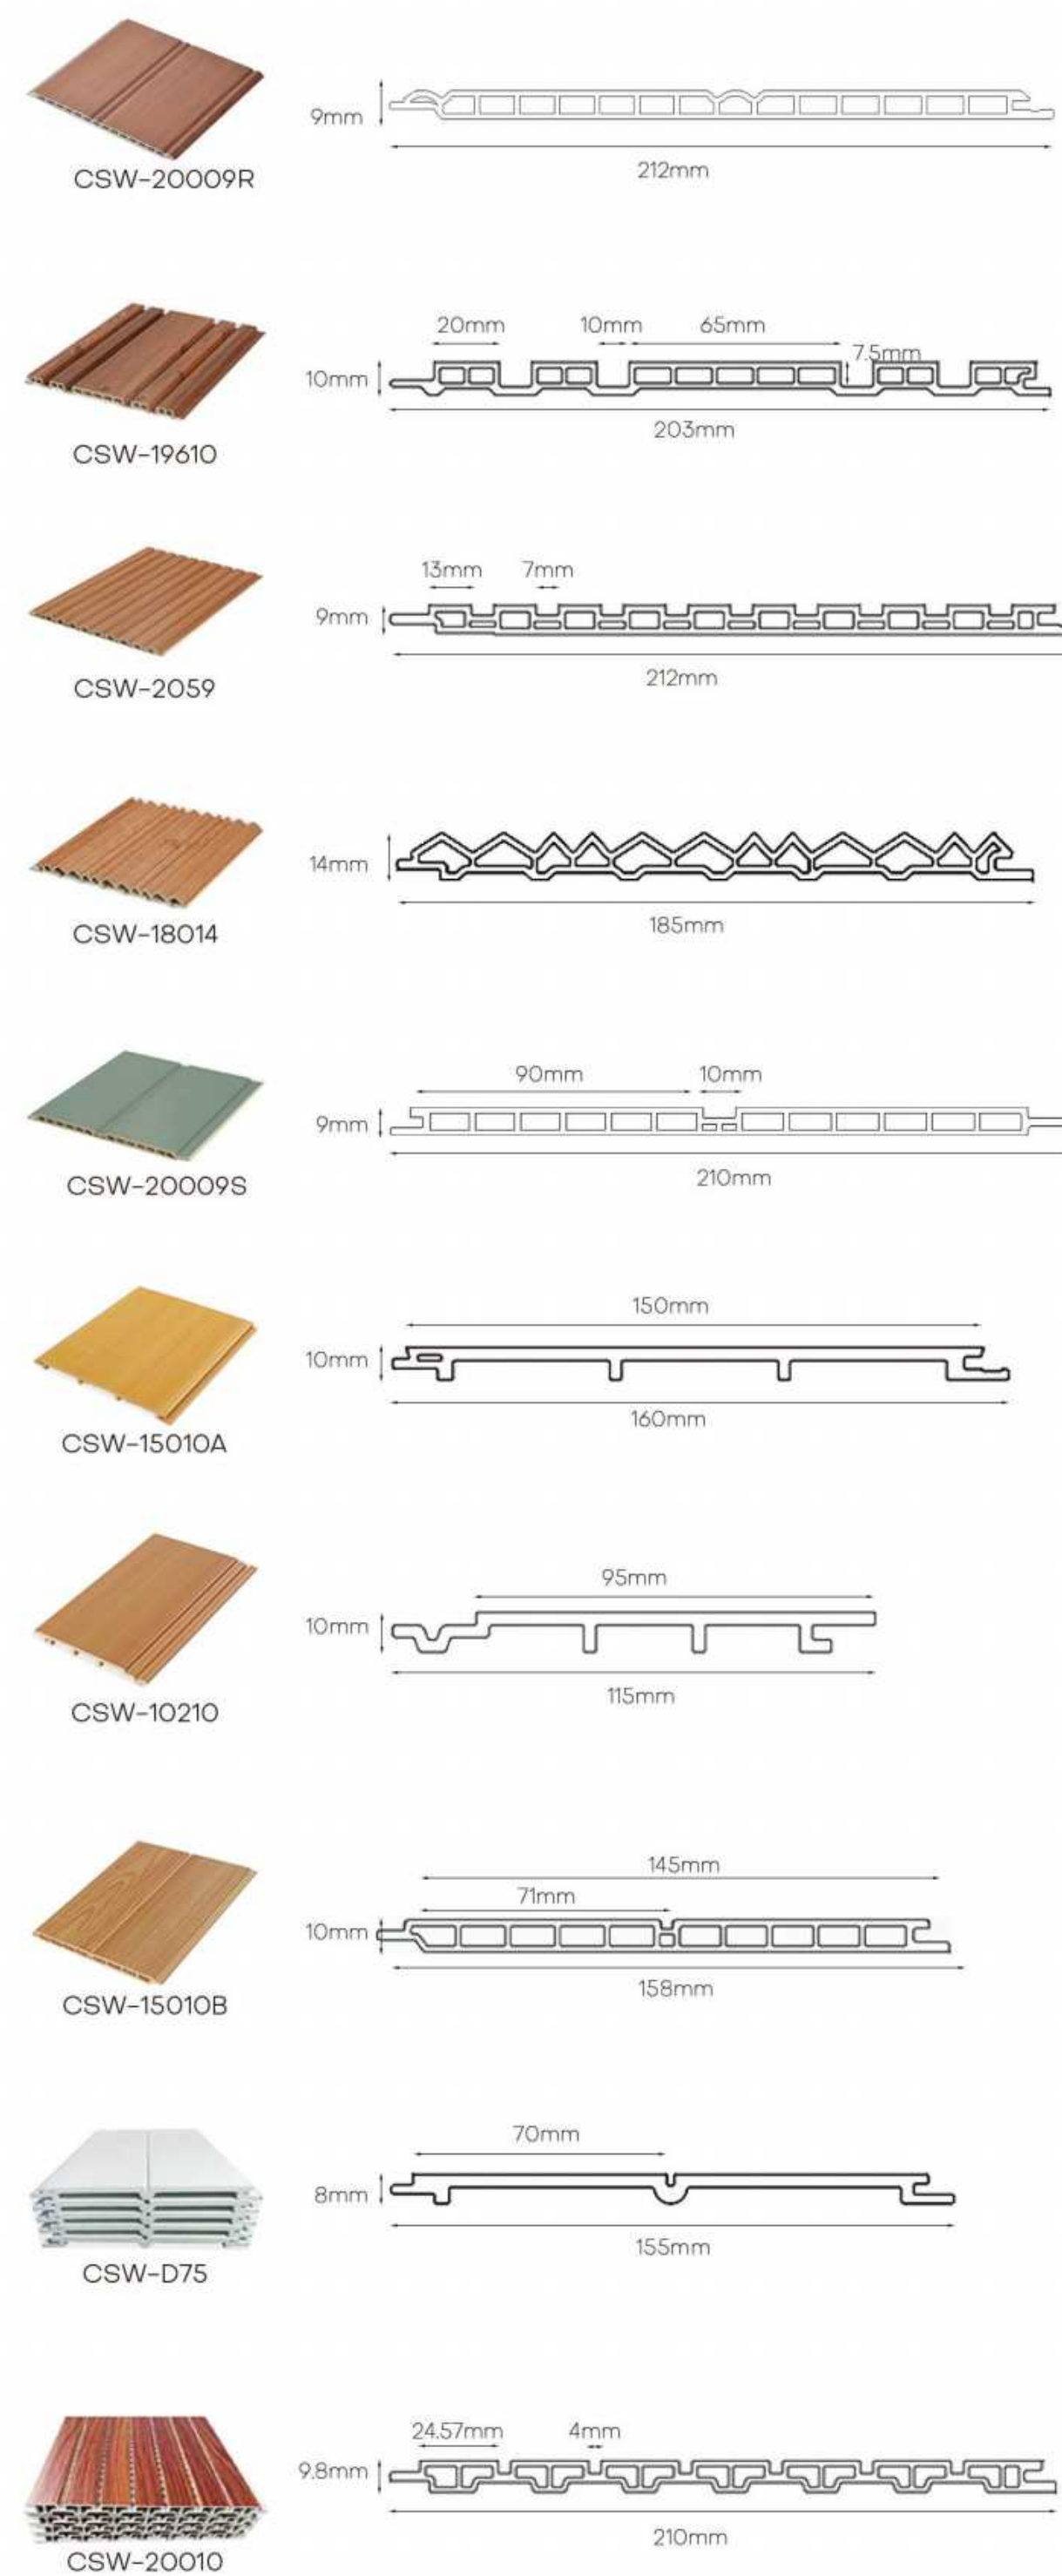

## Skin Feel



## Textured Metal







## Wood Grain



## More Textures

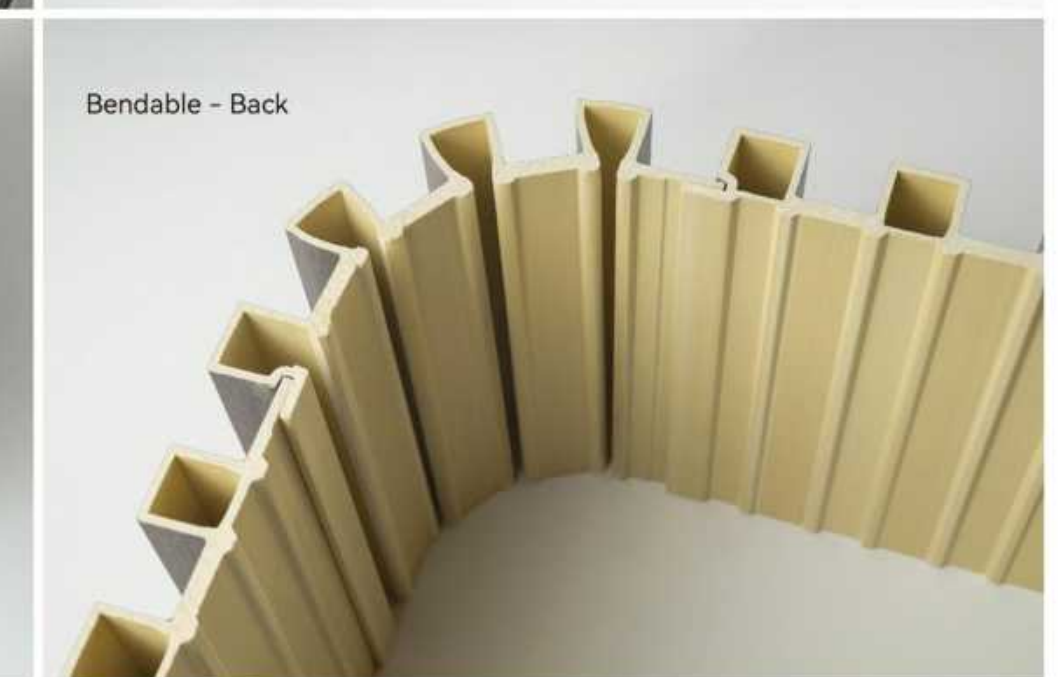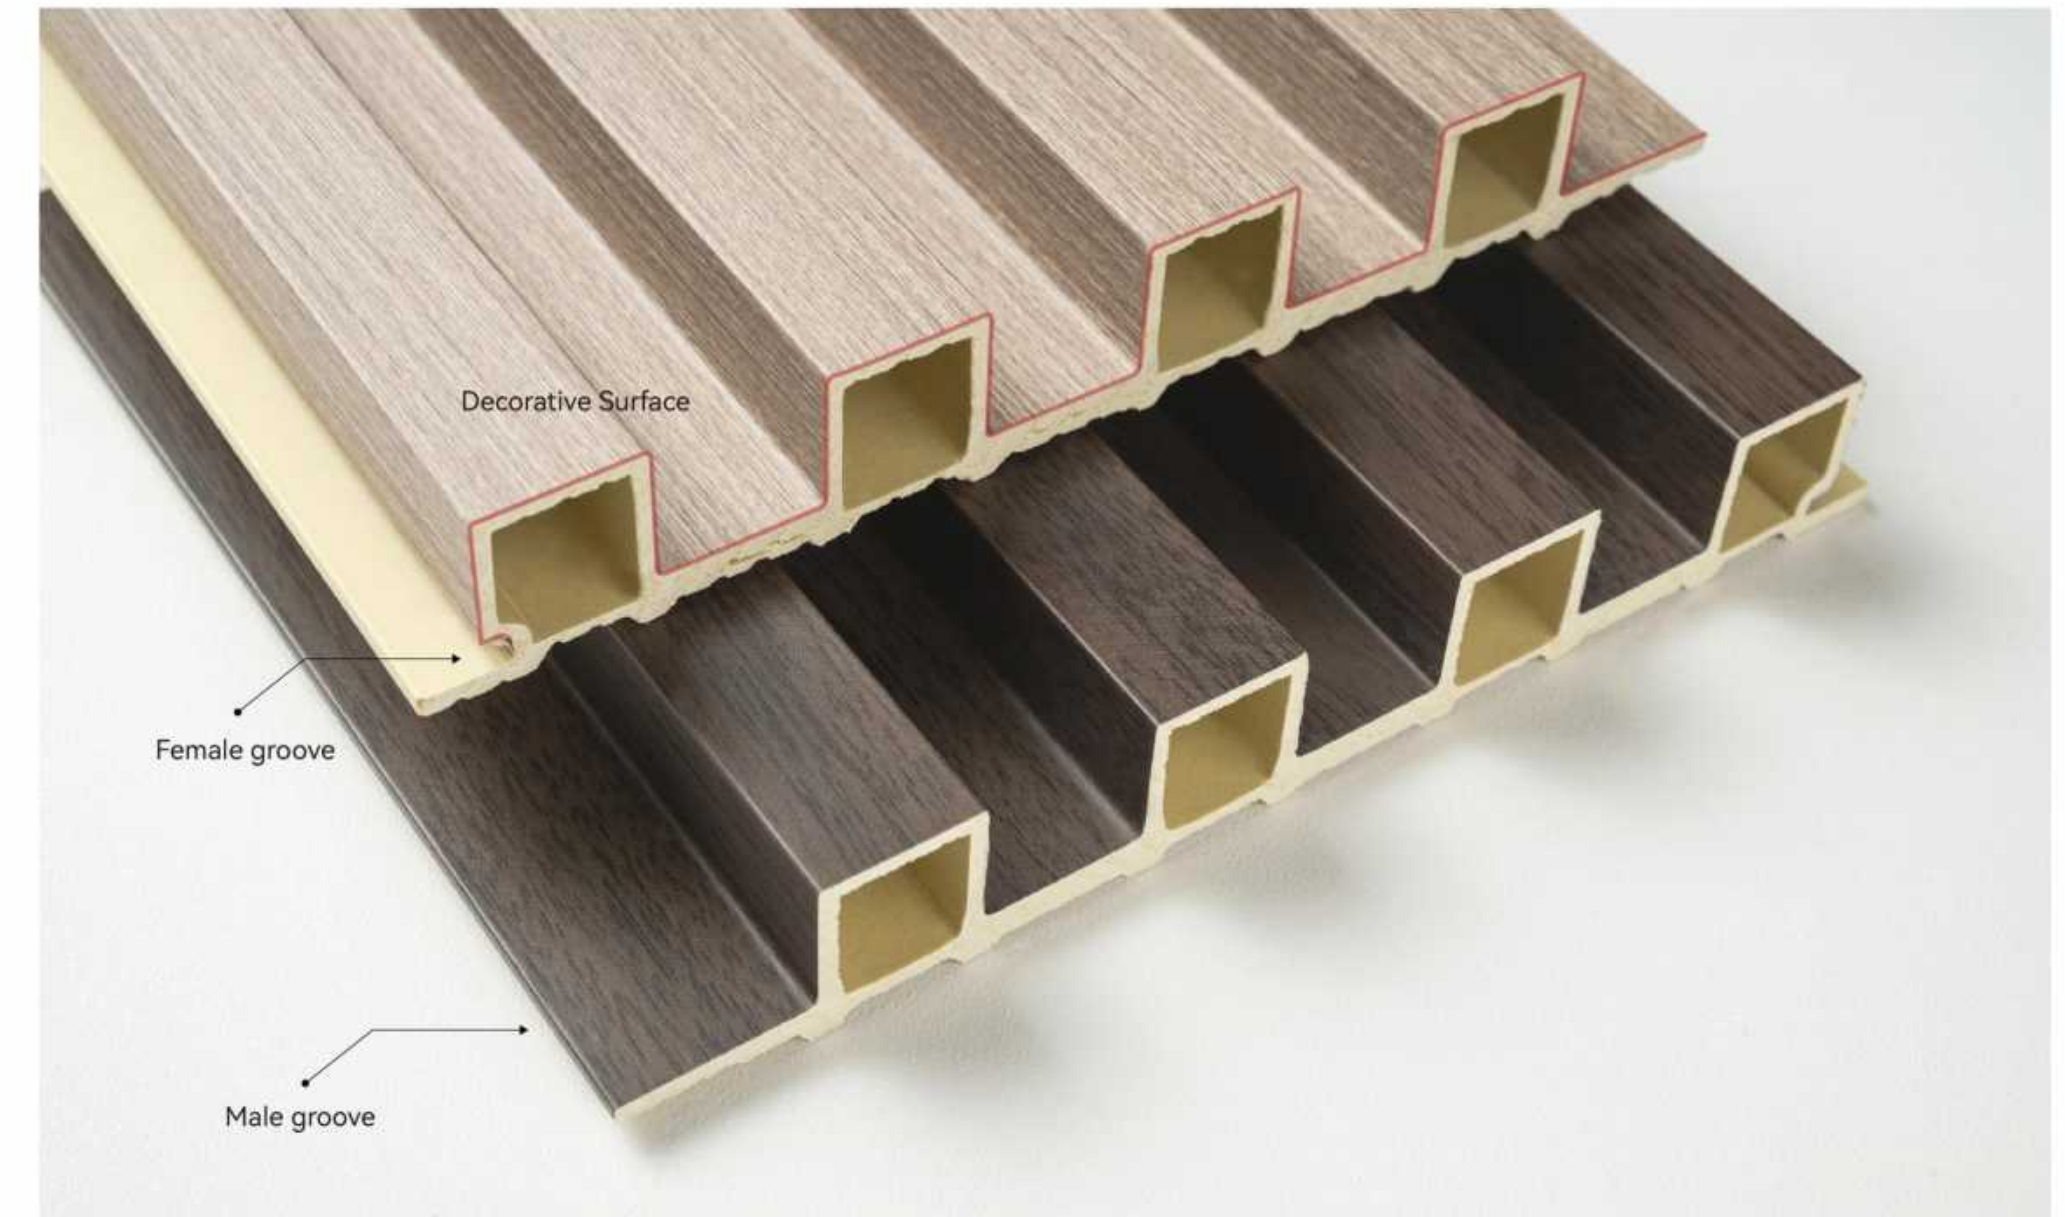




# 01 WPC Wall Panel

Installation Method

## • Methods 1




It is better to drive the nail diagonally into the hard surface.  
The nail gun can be covered with another board that plugs in.  
It doesn't affect the aesthetics.

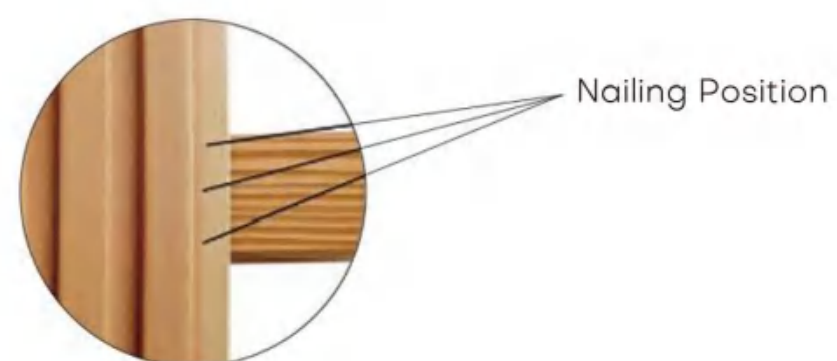


## • Methods 2

Insert the fastener into the bottom edge of the wall panel.  
Fixed to the blank wall.  
This method applies to the wall with smooth surface wall with a flat surface.

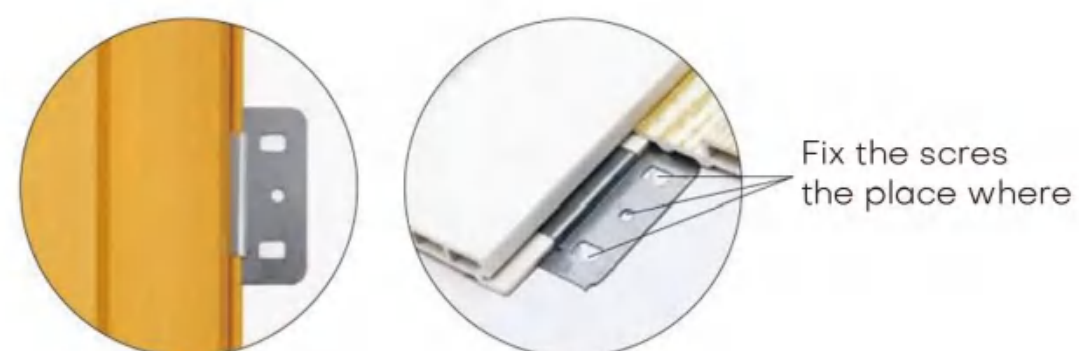


## • Methods 3

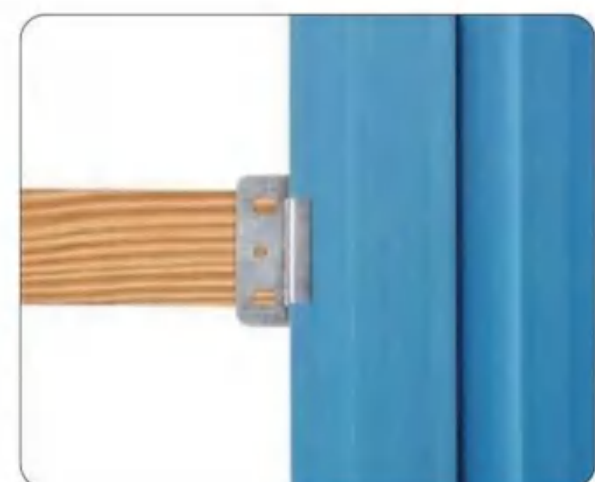

Wood keel leveling the wall  
Self-trapping screws for stainless steel fasteners  
Fasten to the wooden keel  
This method installs all plates  
It can be disassembled and reused


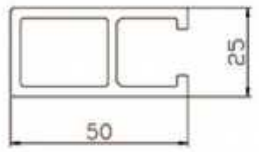






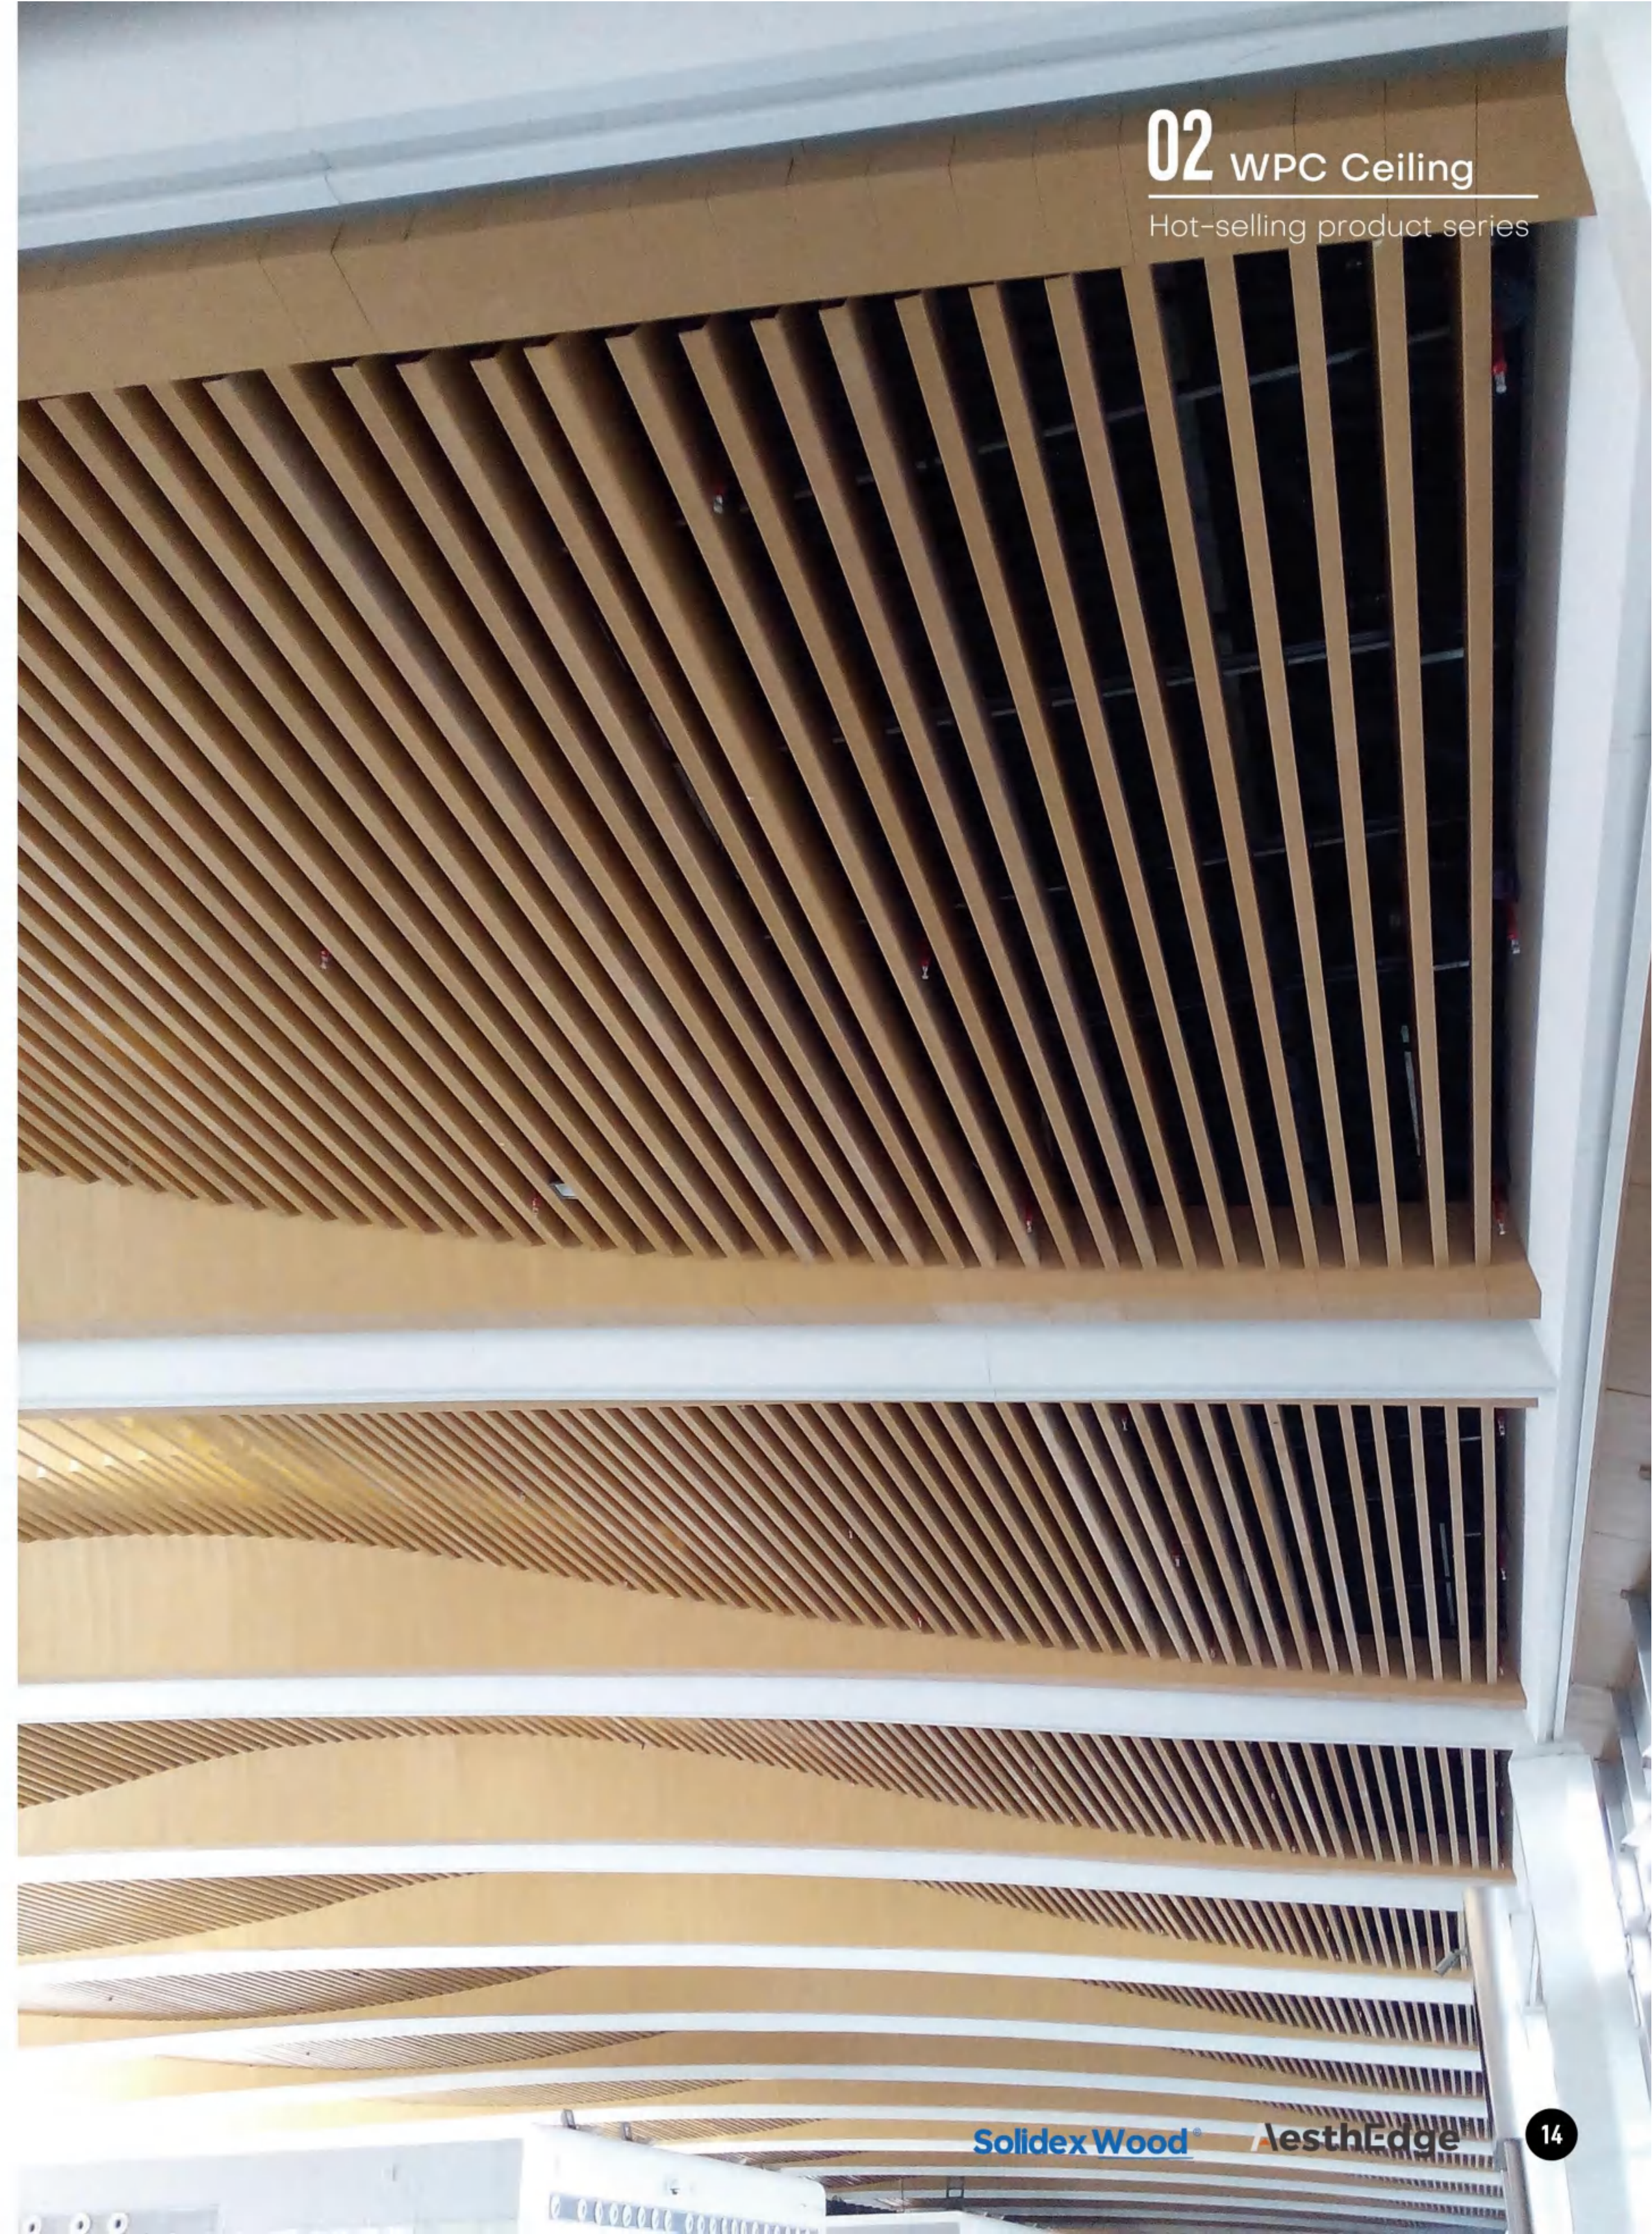


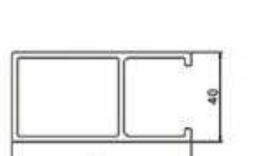


# 02 WPC Ceiling

Hot-selling product series





The ecological wood ceiling is a type of ecological wood product, essentially artificial wood. It is a kind of "greener wood plastic composite material," which is a mixture of resin, wood fiber material, and polymer material in specific proportions. Compared to logs, ecological wood has good stability, retains the physical characteristics of solid wood, and is waterproof, anti-corrosive, and provides heat insulation. Modifiers such as light and thermal stability, UV resistance, and low-temperature impact resistance are added during the production of ecological wood, giving it strong weather resistance and UV protection.

<b>CSW2550</b> W 25mm H 50mm L 2900mm		
<b>CSW4025</b> W 40mm H 25mm L 2900mm		
<b>CSW4045</b> W 40mm H 45mm L 2900mm		
<b>CSW4060</b> W 40mm H 60mm L 2900mm		
<b>CSW4075</b> W 40mm H 75mm L 2900mm		
<b>CSW4080</b> W 40mm H 80mm L 2900mm		
<b>CSW40100</b> W 40mm H 100mm L 2900mm		


<b>CSW5060</b> W 50mm H 60mm L 2900mm		
<b>CSW5075</b> W 50mm H 75mm L 2900mm		
<b>CSW5090</b> W 50mm H 90mm L 2900mm		
<b>CSW50100</b> W 50mm H 100mm L 2900mm		



Accessories



Installation structure

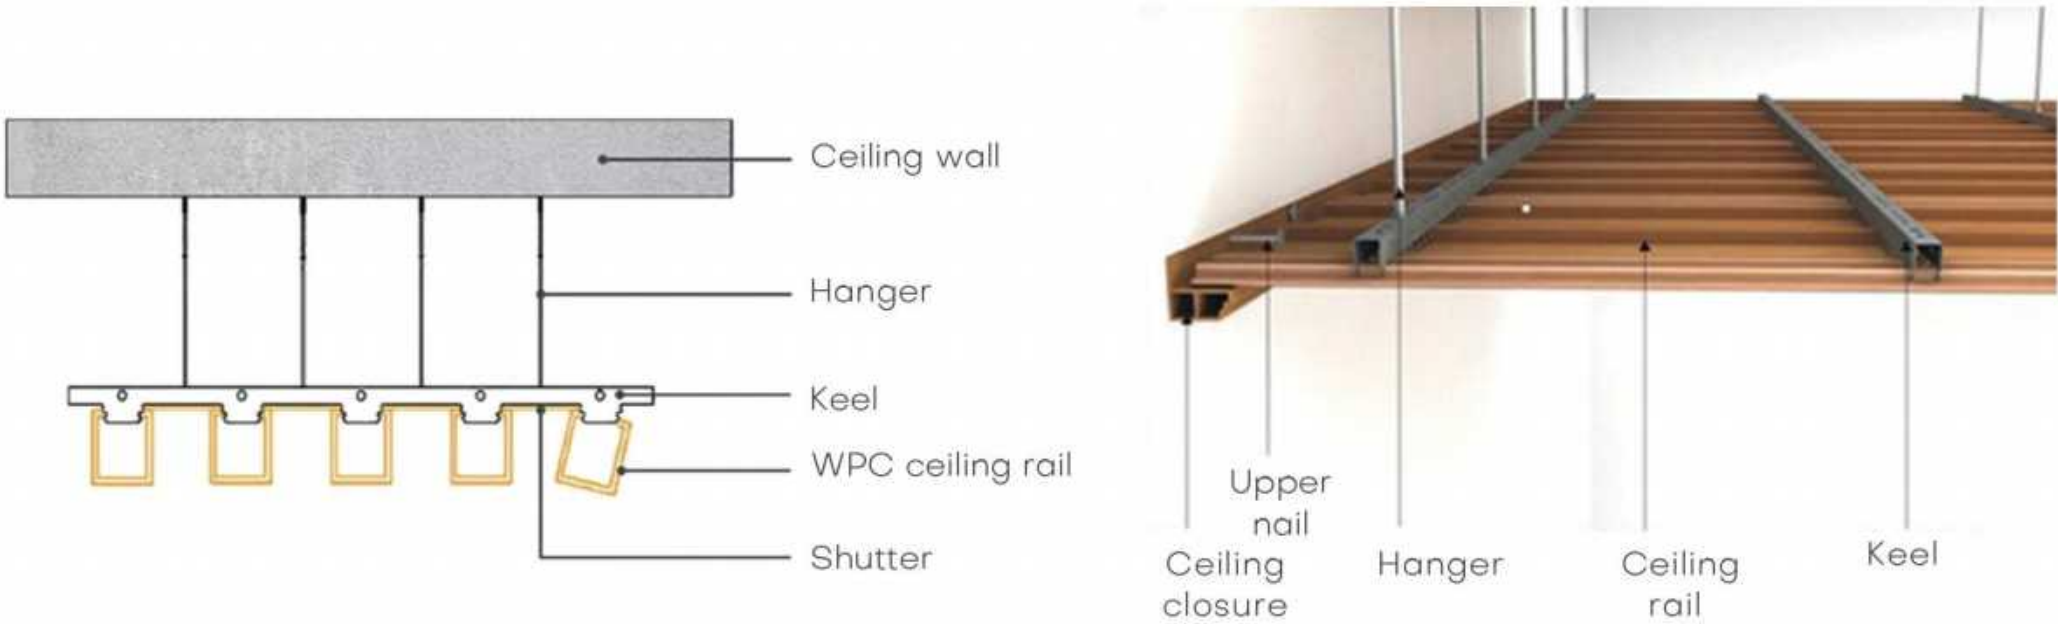

Installation





# 03 WPC Timber Tube


Hot-selling product series

WPC (Wood Plastic Composite) timber tubes are composite materials made from a blend of wood fibers or wood flour and thermoplastics, typically polyethylene, polypropylene, or PVC. This combination results in a product that mimics the appearance of natural wood while providing the benefits of plastic, such as enhanced durability and resistance to environmental factors.



## CSW4025

W 40mm  
H 25mm  
L 2900mm




## CSW7550

W 75mm  
H 50mm  
L 2900mm




## CSW5025

W 50mm  
H 25mm  
L 2900mm




## CSW10050

W 100mm  
H 50mm  
L 2900mm



## CSW5040

W 50mm  
H 40mm  
L 2900mm




## CSW10050

W 100mm  
H 50mm  
L 2900mm



## CSW5050

W 50mm  
H 50mm  
L 2900mm



## CSW100100

W 100mm  
H 100mm  
L 2900mm




## CSW6525

W 65mm  
H 25mm  
L 2900mm



## CSW15050

W 150mm  
H 50mm  
L 2900mm





# 03 WPC Timber Tube

## Installation Method

### • Installation




1.Clean both ends of WPC timber tube and put glue in.



2.Insert the wooden block 1 which is 5cm in both ends of WPC timber tube.



3.Put glue on both ends of the wooden block 1 for WPC timber tube.

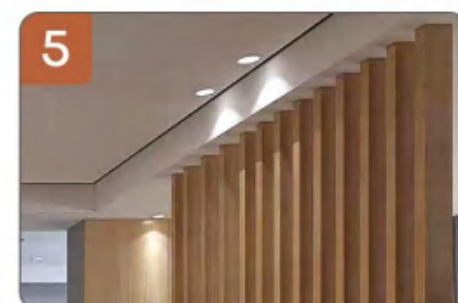

4.Fix wooden block 2 on position of the ceiling floor by glue, and then put the WPC square tube on the position of wooden block 2, then finish.



# 04 Bamboo Charcoal Wood Veneer

## Hot-selling product series





# 04 Bamboo Charcoal Wood Veneer

## Hot-selling product series

Bamboo Charcoal Wood Veneer is made of polyvinyl chloride resin, combined with wood powder and special additives, then extruded. It is a waterproof, lightweight, expanded rigid plastic board suitable for various applications, including kitchen and bathroom cabinets, interior decoration, booths, advertising signs and displays, prototypes, and more.

Due to its high workability, Bamboo Charcoal Wood Veneer can be easily processed by sawing, CNC cutting, printing, sanding, routing, painting, laminating, and other methods.

### Anti-Collision Board



Material	High hardness SPC&Bamboo Charcoal Fiber
Thickness	5/8mm
Size	1220*2440mm(4*8feet),customized
Density	0.5-0.9tons/m³
Advantage	Impact Resistance & Deformation Resistance & Bend Plasticity

### Bamboo Wood Veneer



Material	WPC coextrusion layer&Bamboo Charcoal Fiber
Thickness	5/8mm
Size	1220*2440mm(4*8feet),customized
Density	0.5-0.9tons/m³
Advantage	Water proof&Bend Plasticity

### Anti-Collision Board




Material	WPC coextrusion layer&Bamboo Charcoal Fiber
Thickness	5/8mm
Size	1220*2440mm(4*8feet),customized
Density	0.5-0.9tons/m³
Advantage	Water proof & Bend Plasticity

### Splicing method




Flat Seam Channel   U-shaped Channel   Double Female Channel

### Bendable and chamferable

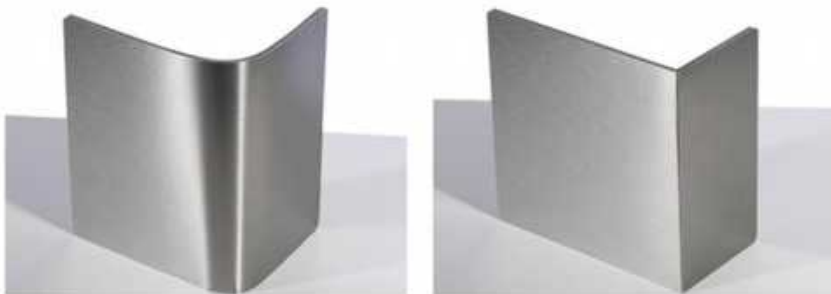

### Matching lines

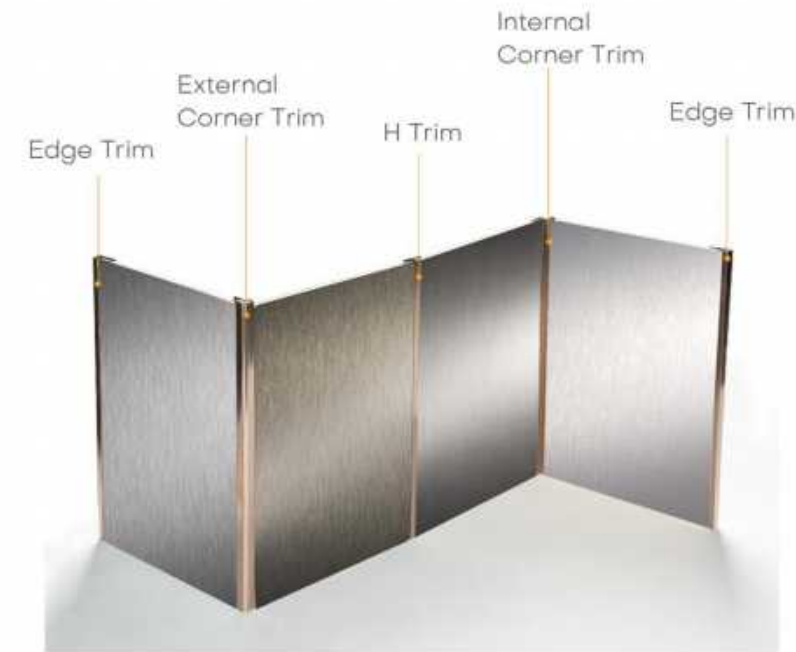

PVC Film






04 Bamboo Charcoal Wood Veneer

Hot-selling product series

Skin Feel



Baby's Breath

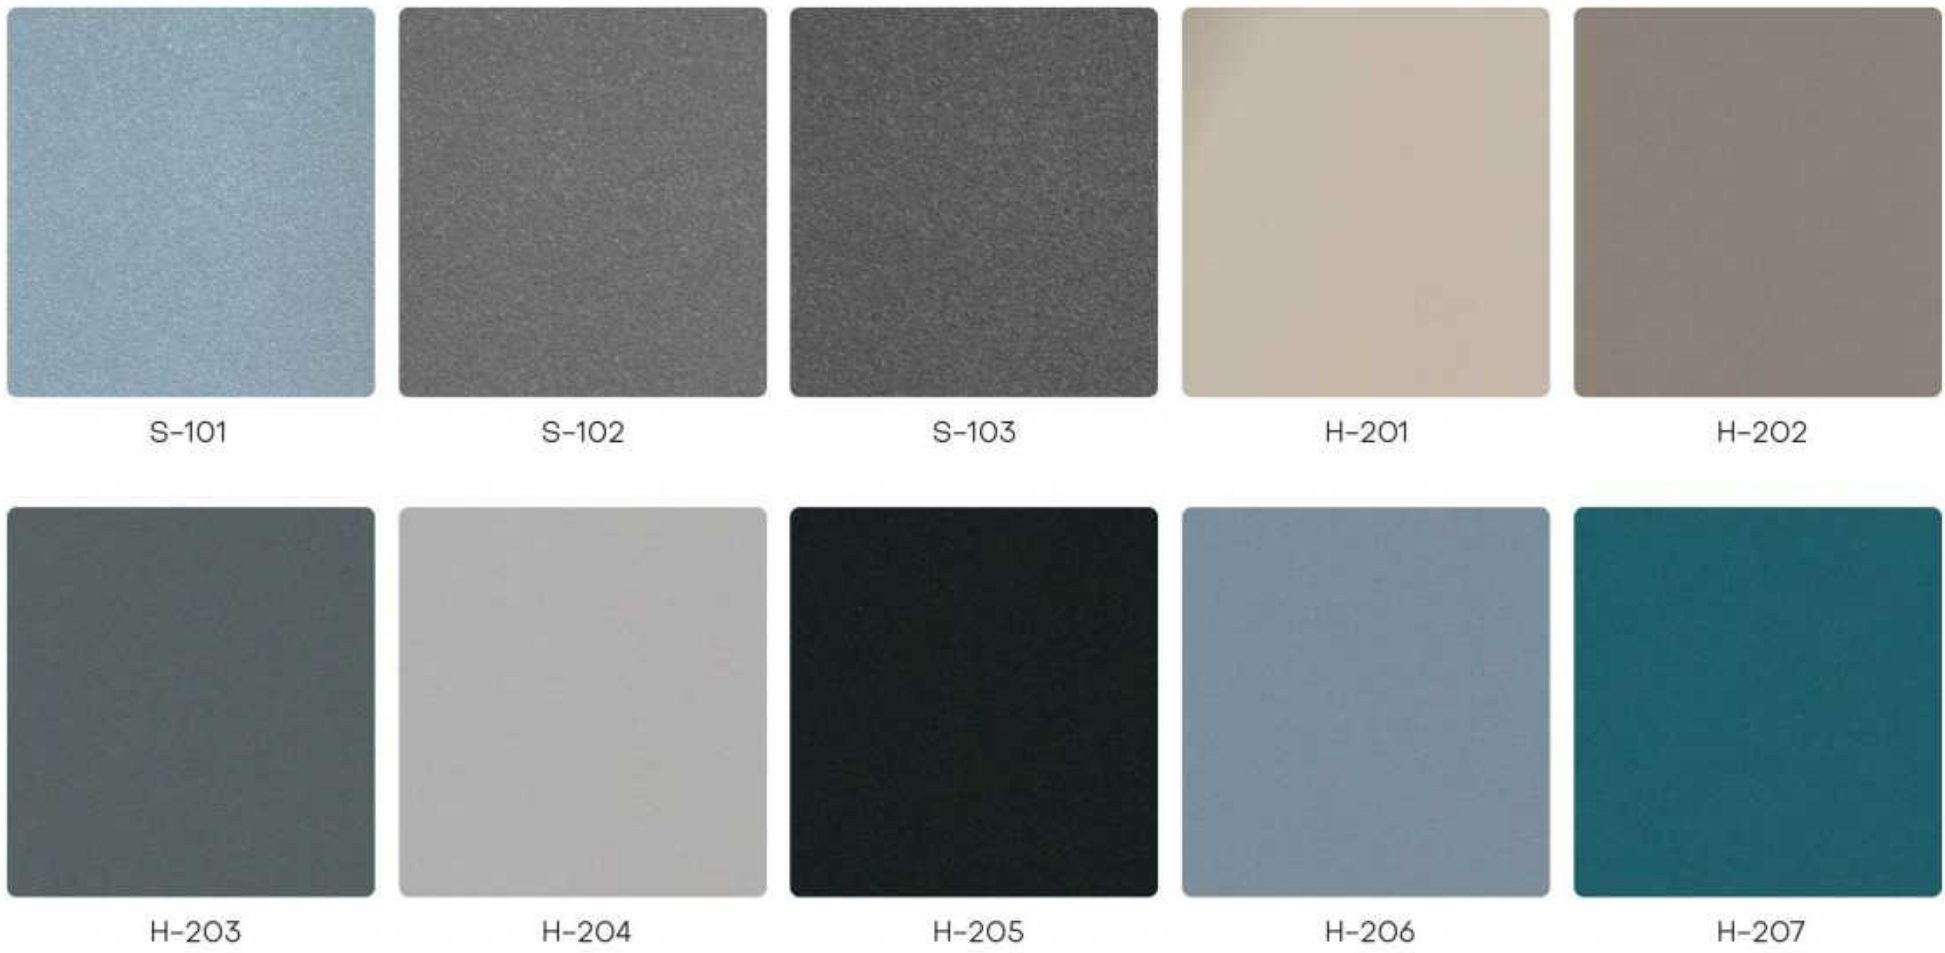


Metal Wire-Drawing



Mirror



Water Ripple

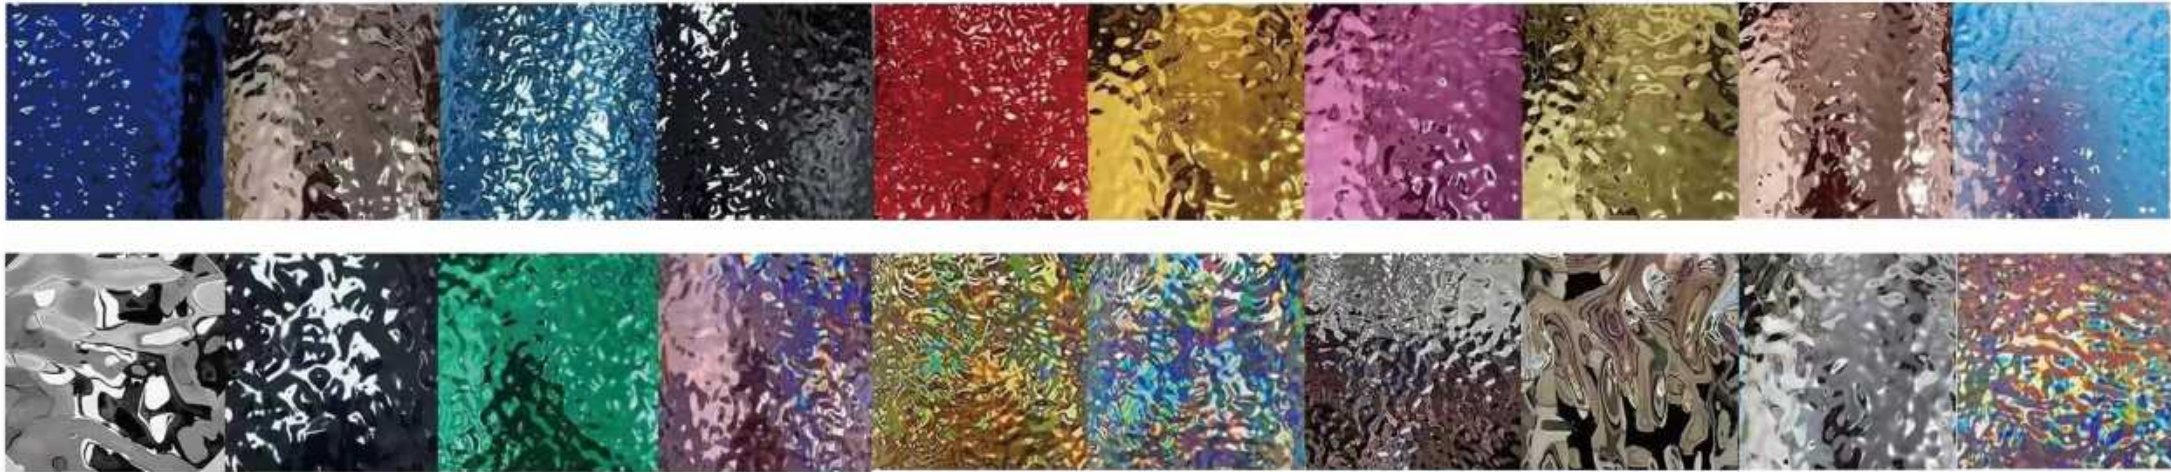





04 Bamboo Charcoal Wood Veneer

Hot-selling product series



Color Focus

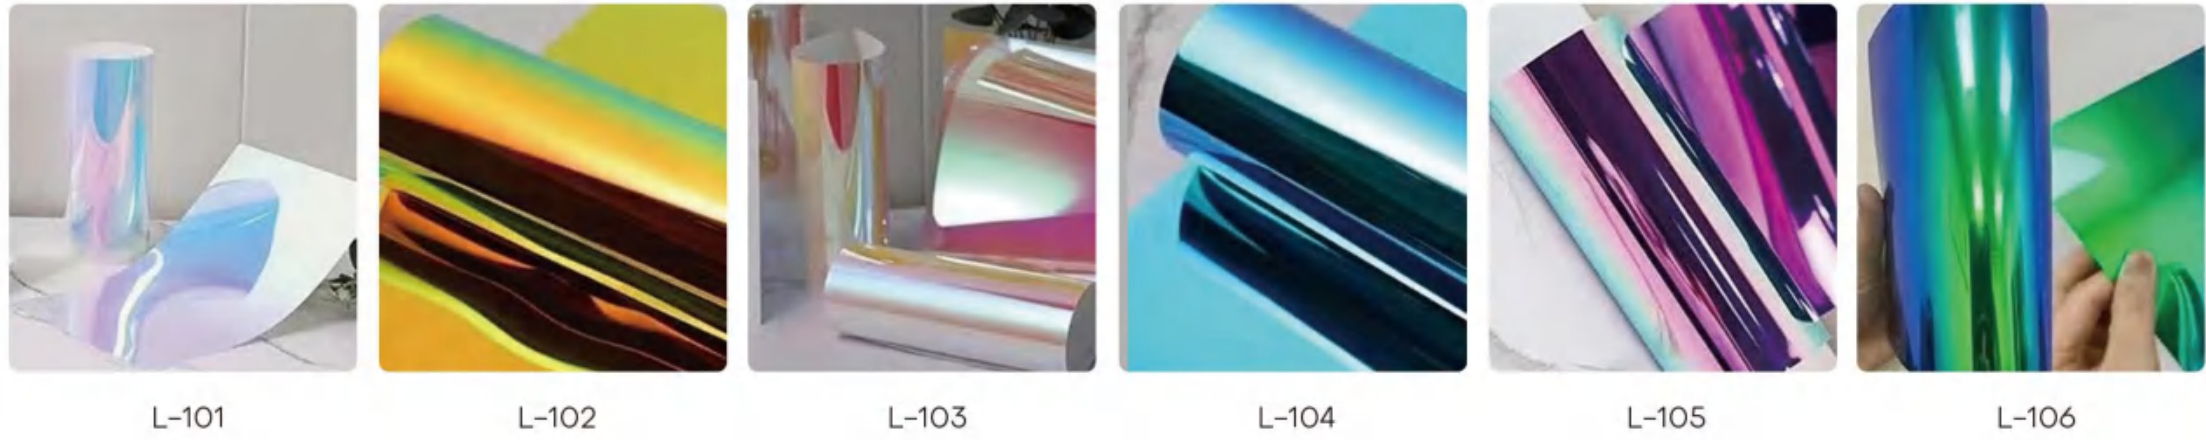

Laser

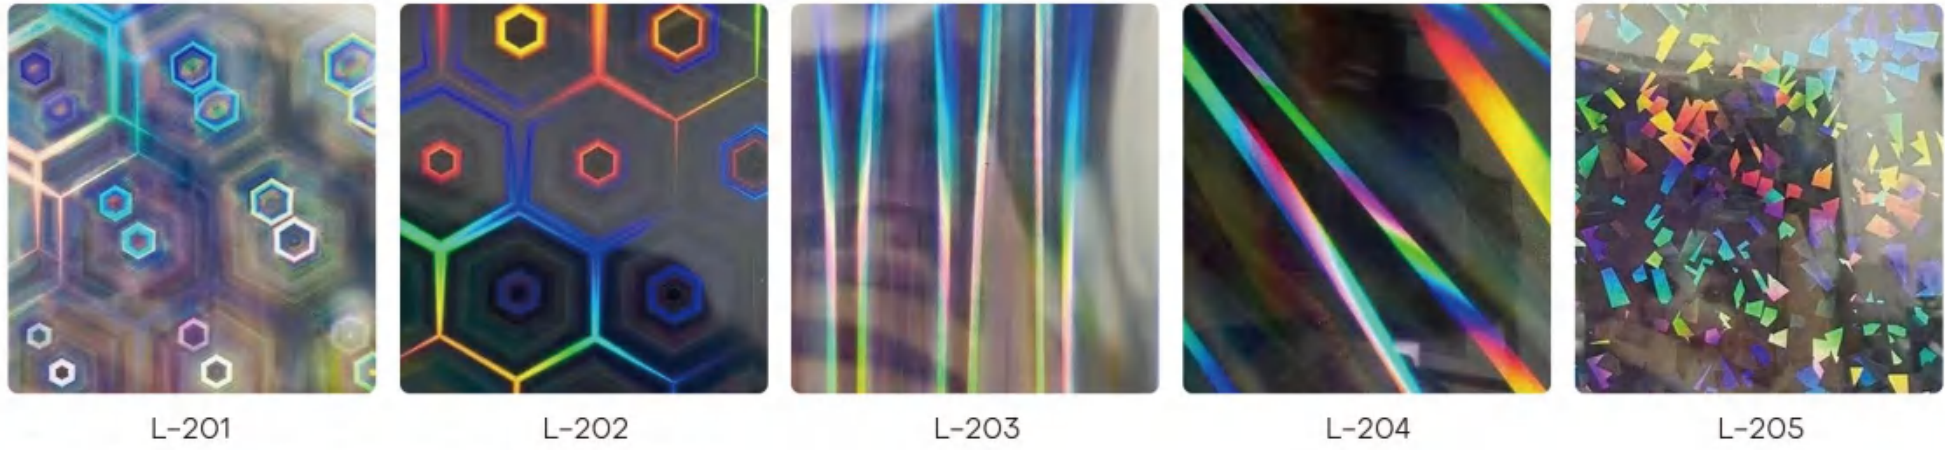



Mosaic

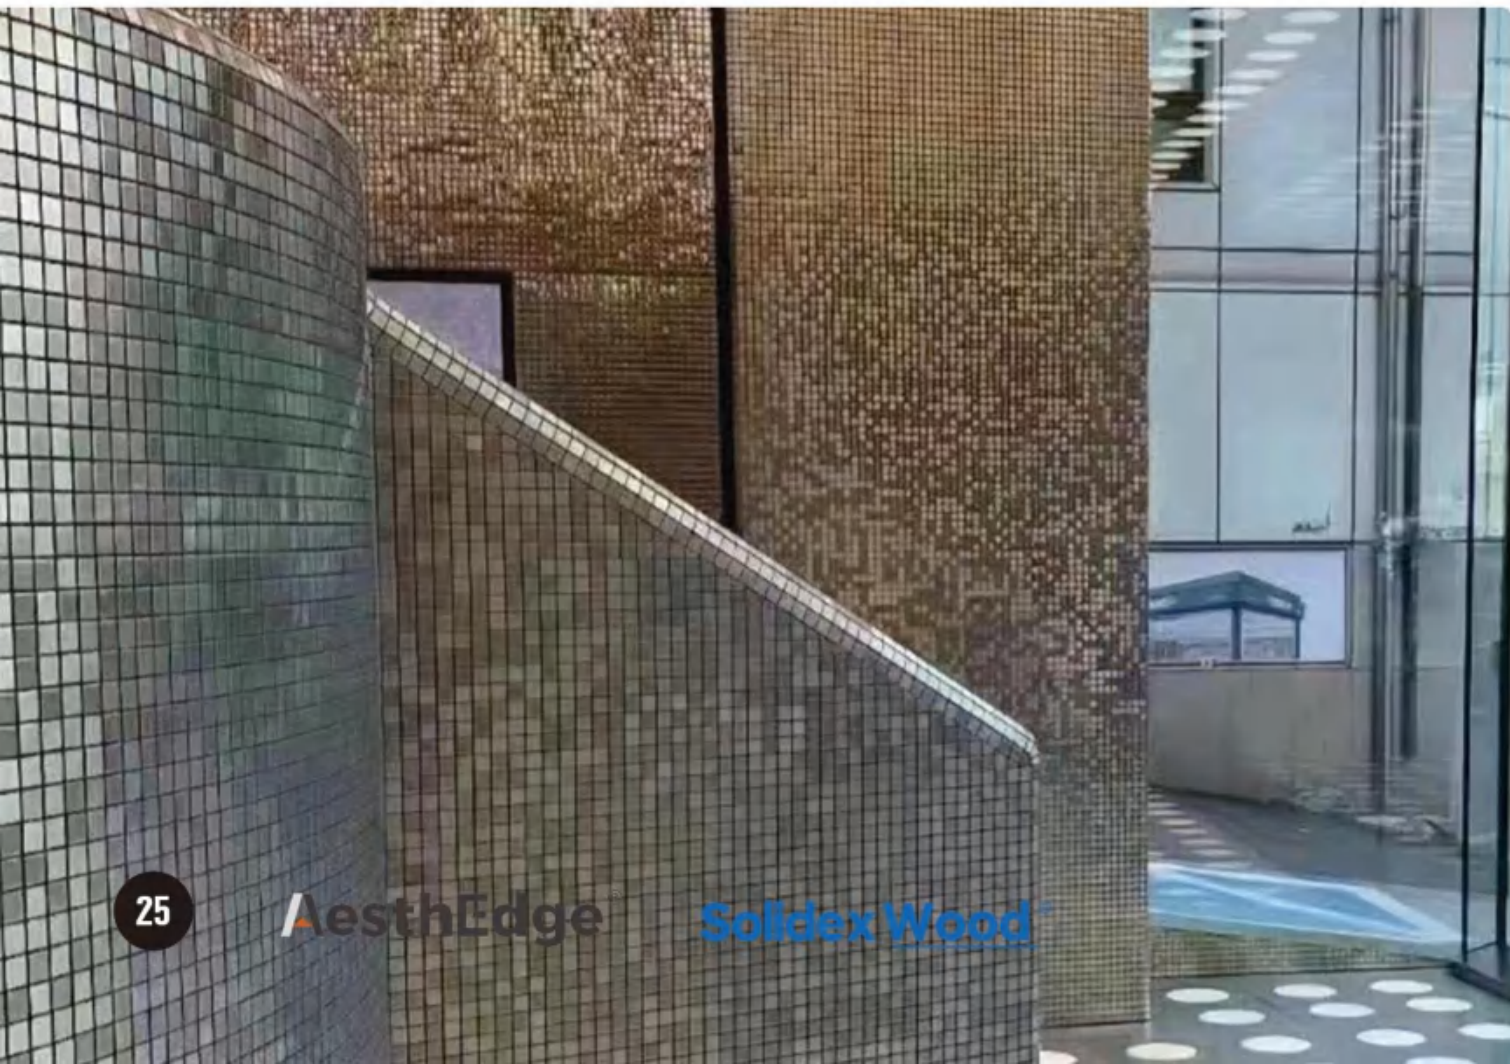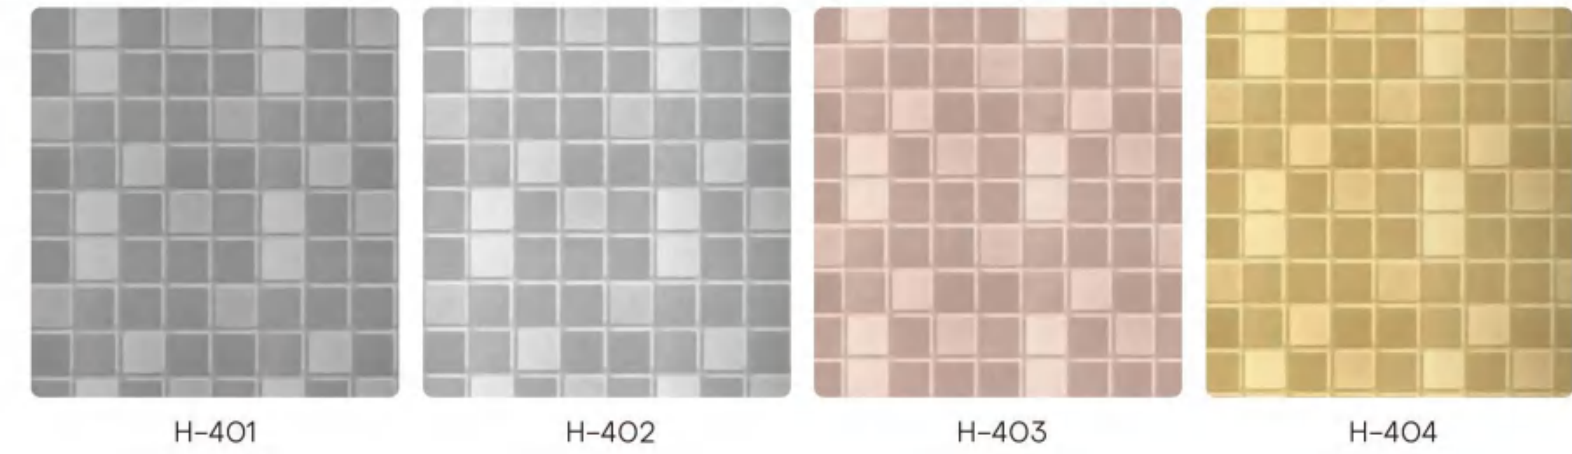




# 04 Bamboo Charcoal Wood Veneer

Installation Method

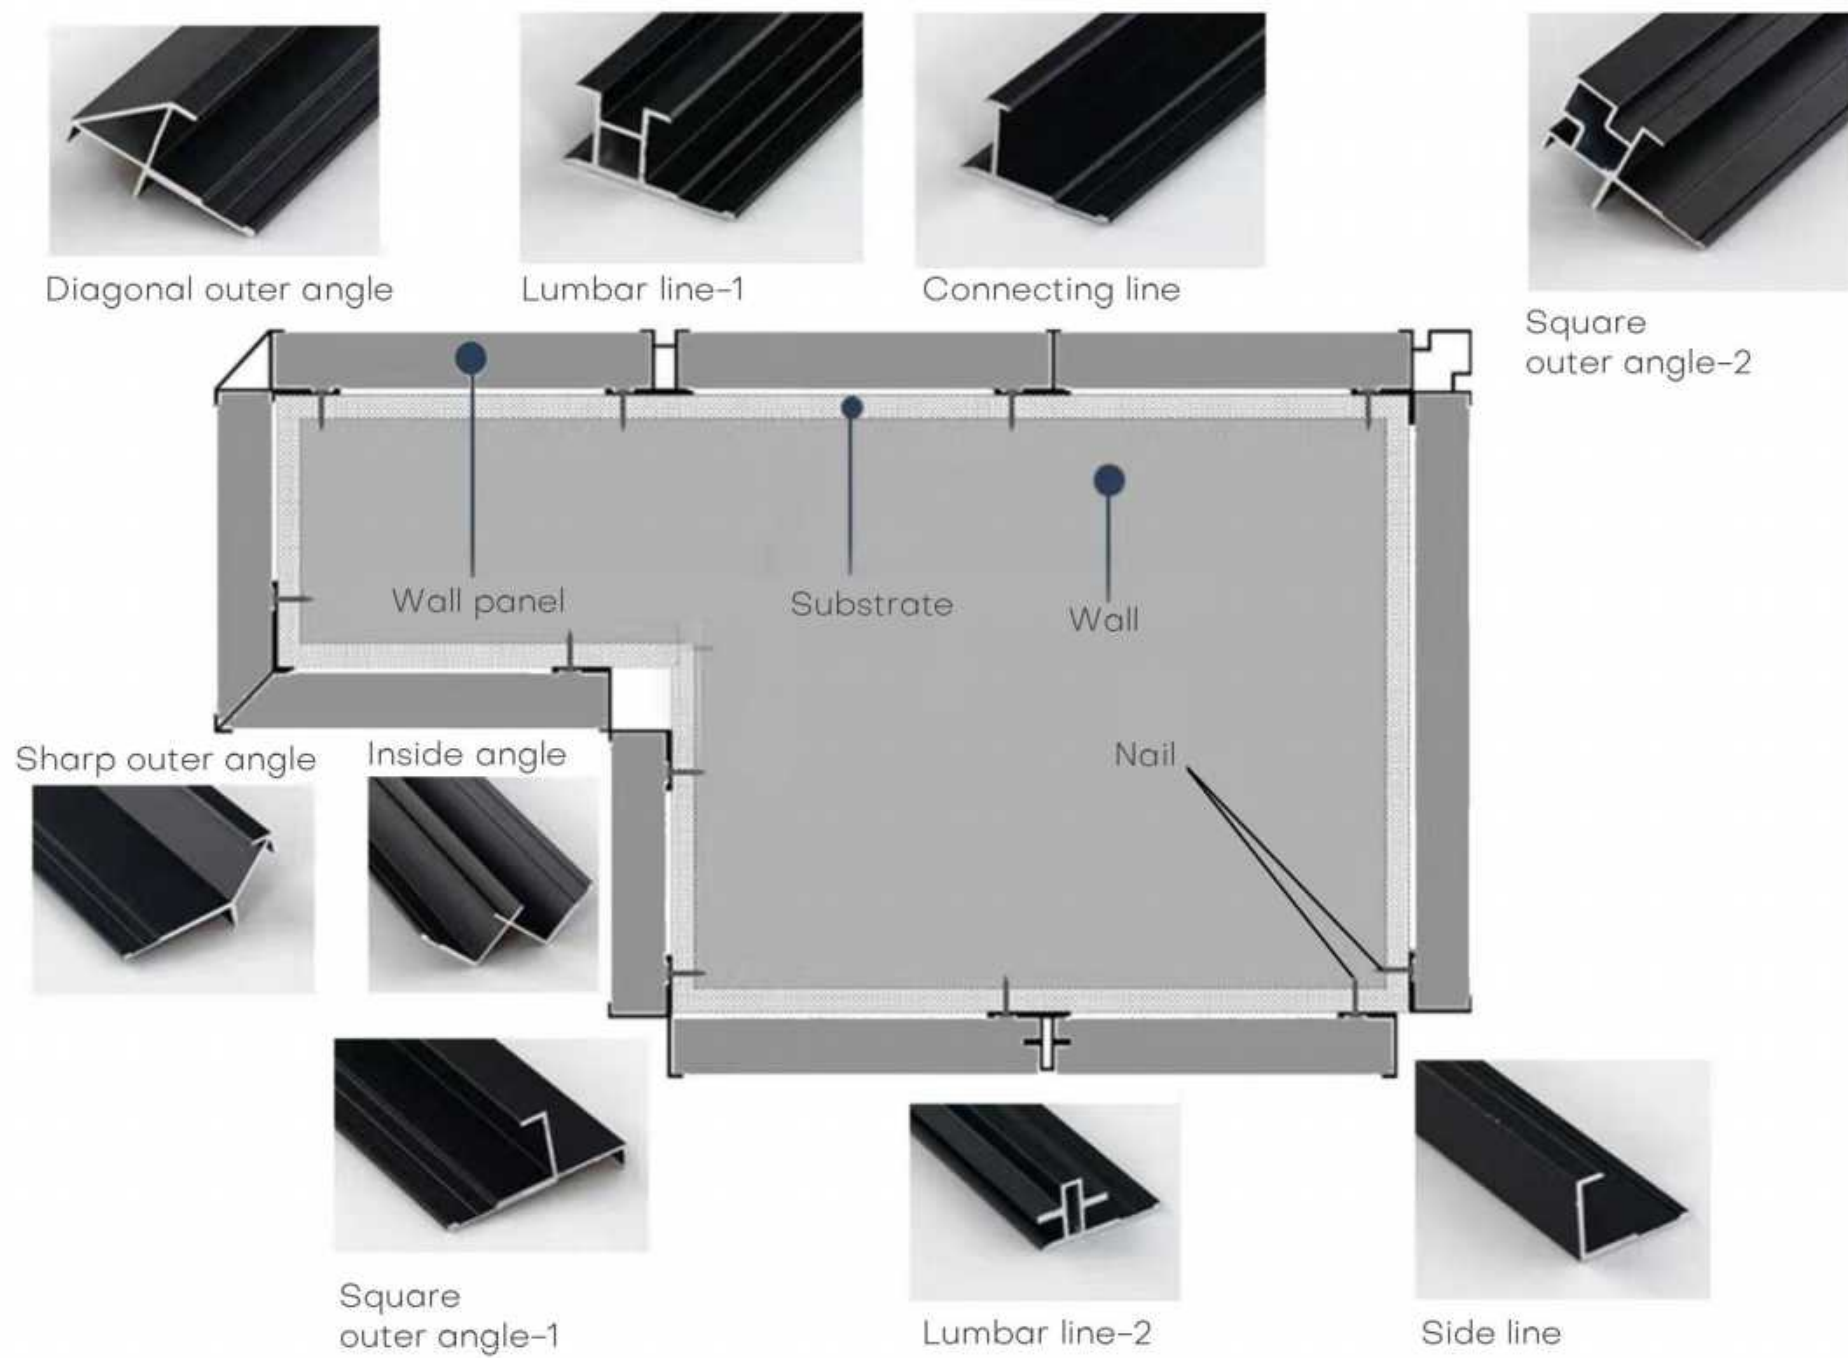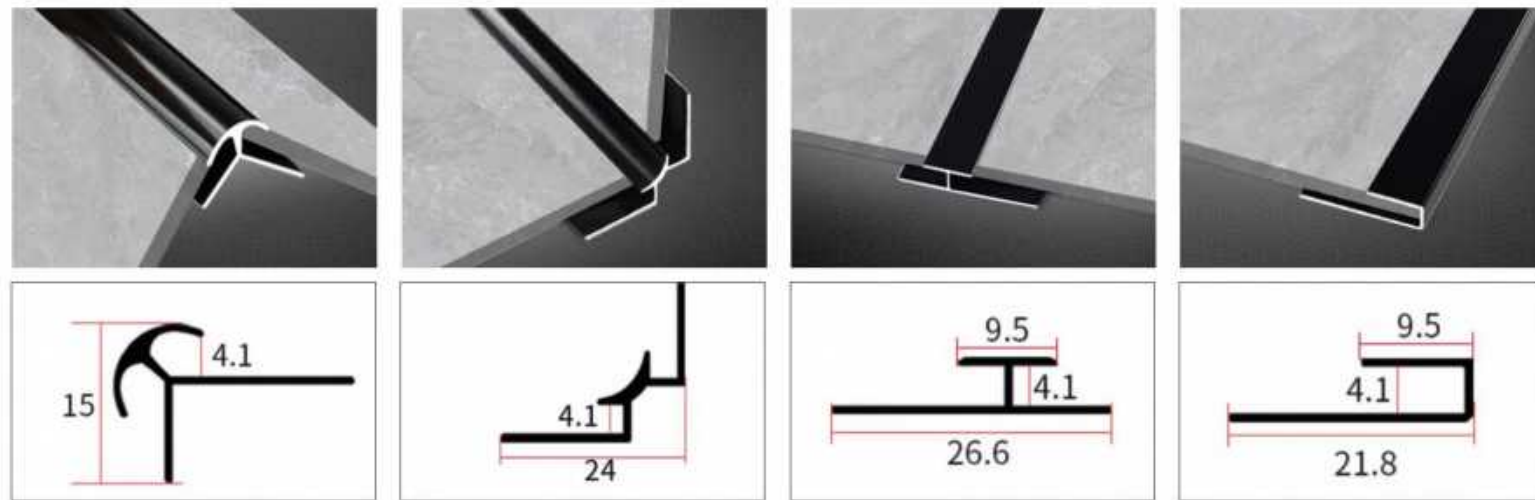

## ◦ Installation

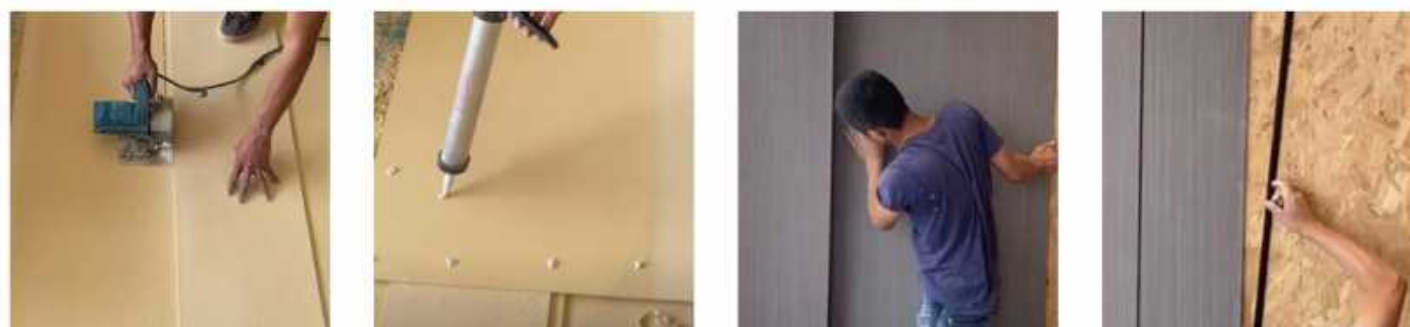

Step 1: Cut the WPC foam board to size.

Step 2: Apply no-nail free glue to the back.

Step 3: Install on the wall.

Step 4: Insert the dovetail strips.

# 05 PVC Marble Sheet

Hot-selling product series






# 05 PVC Marble Sheet

Hot-selling product series

PVC Marble Sheet is a premium decorative wall panel made from high-quality PVC, calcium powder, and performance-enhancing additives. Specially engineered for wall applications, it delivers excellent waterproof performance in bathrooms and dependable fire resistance in kitchens. Featuring a realistic marble finish, it adds elegance to interior spaces such as TV background walls. Lighter than natural stone, radiation-free, and highly cost-effective, it offers a perfect combination of aesthetics, functionality, and safety—making it an ideal choice for modern wall cladding.


Material	Polyvinyl Chloride/Calcium Powder
Thickness	2.5/2.8/3mm
Size	1220*2440/2800/2900mm
Surface	Hot Stamp/PVC Film/3D Printing

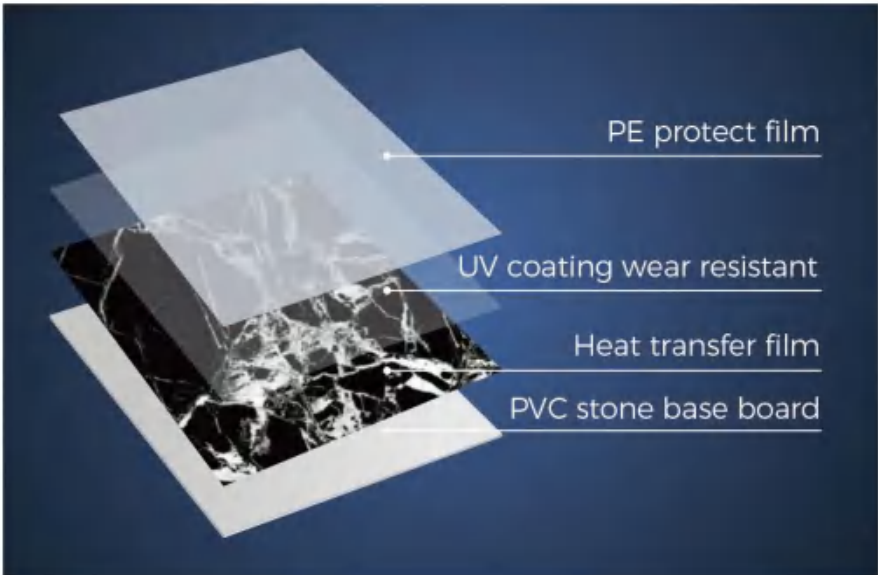


PVC Film




P-001

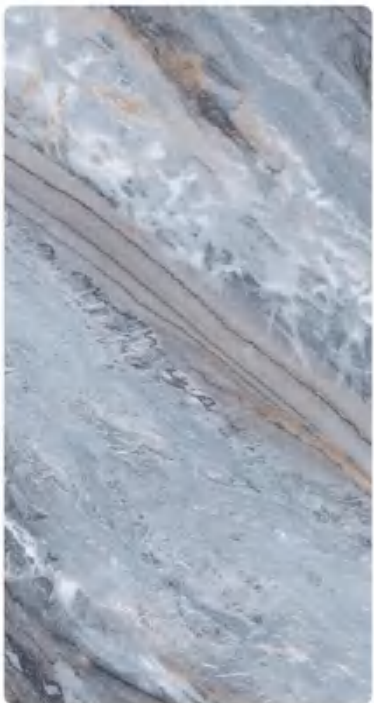

P-002

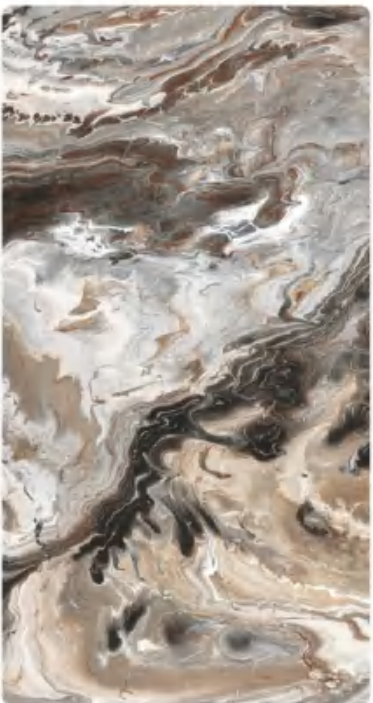

P-003

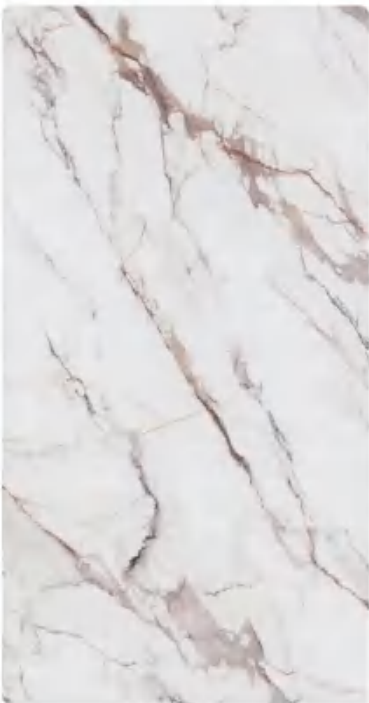

P-004



P-005



P-006




P-007



P-008



P-009

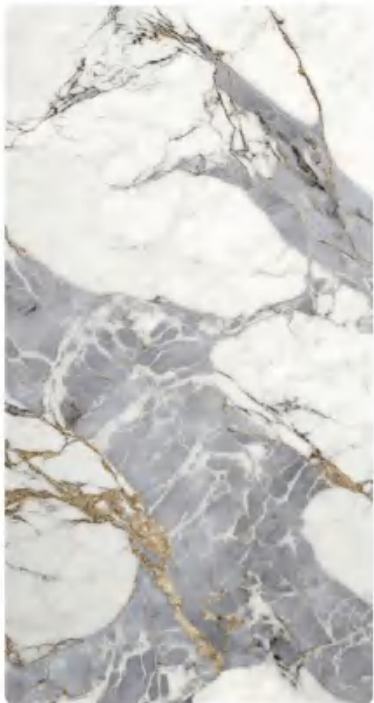

P-010



P-011



P-012



P-013



P-014



P-015



P-016




05


PVC Marble Sheet

Hot-selling product series

Culinan Series Marble Sheet

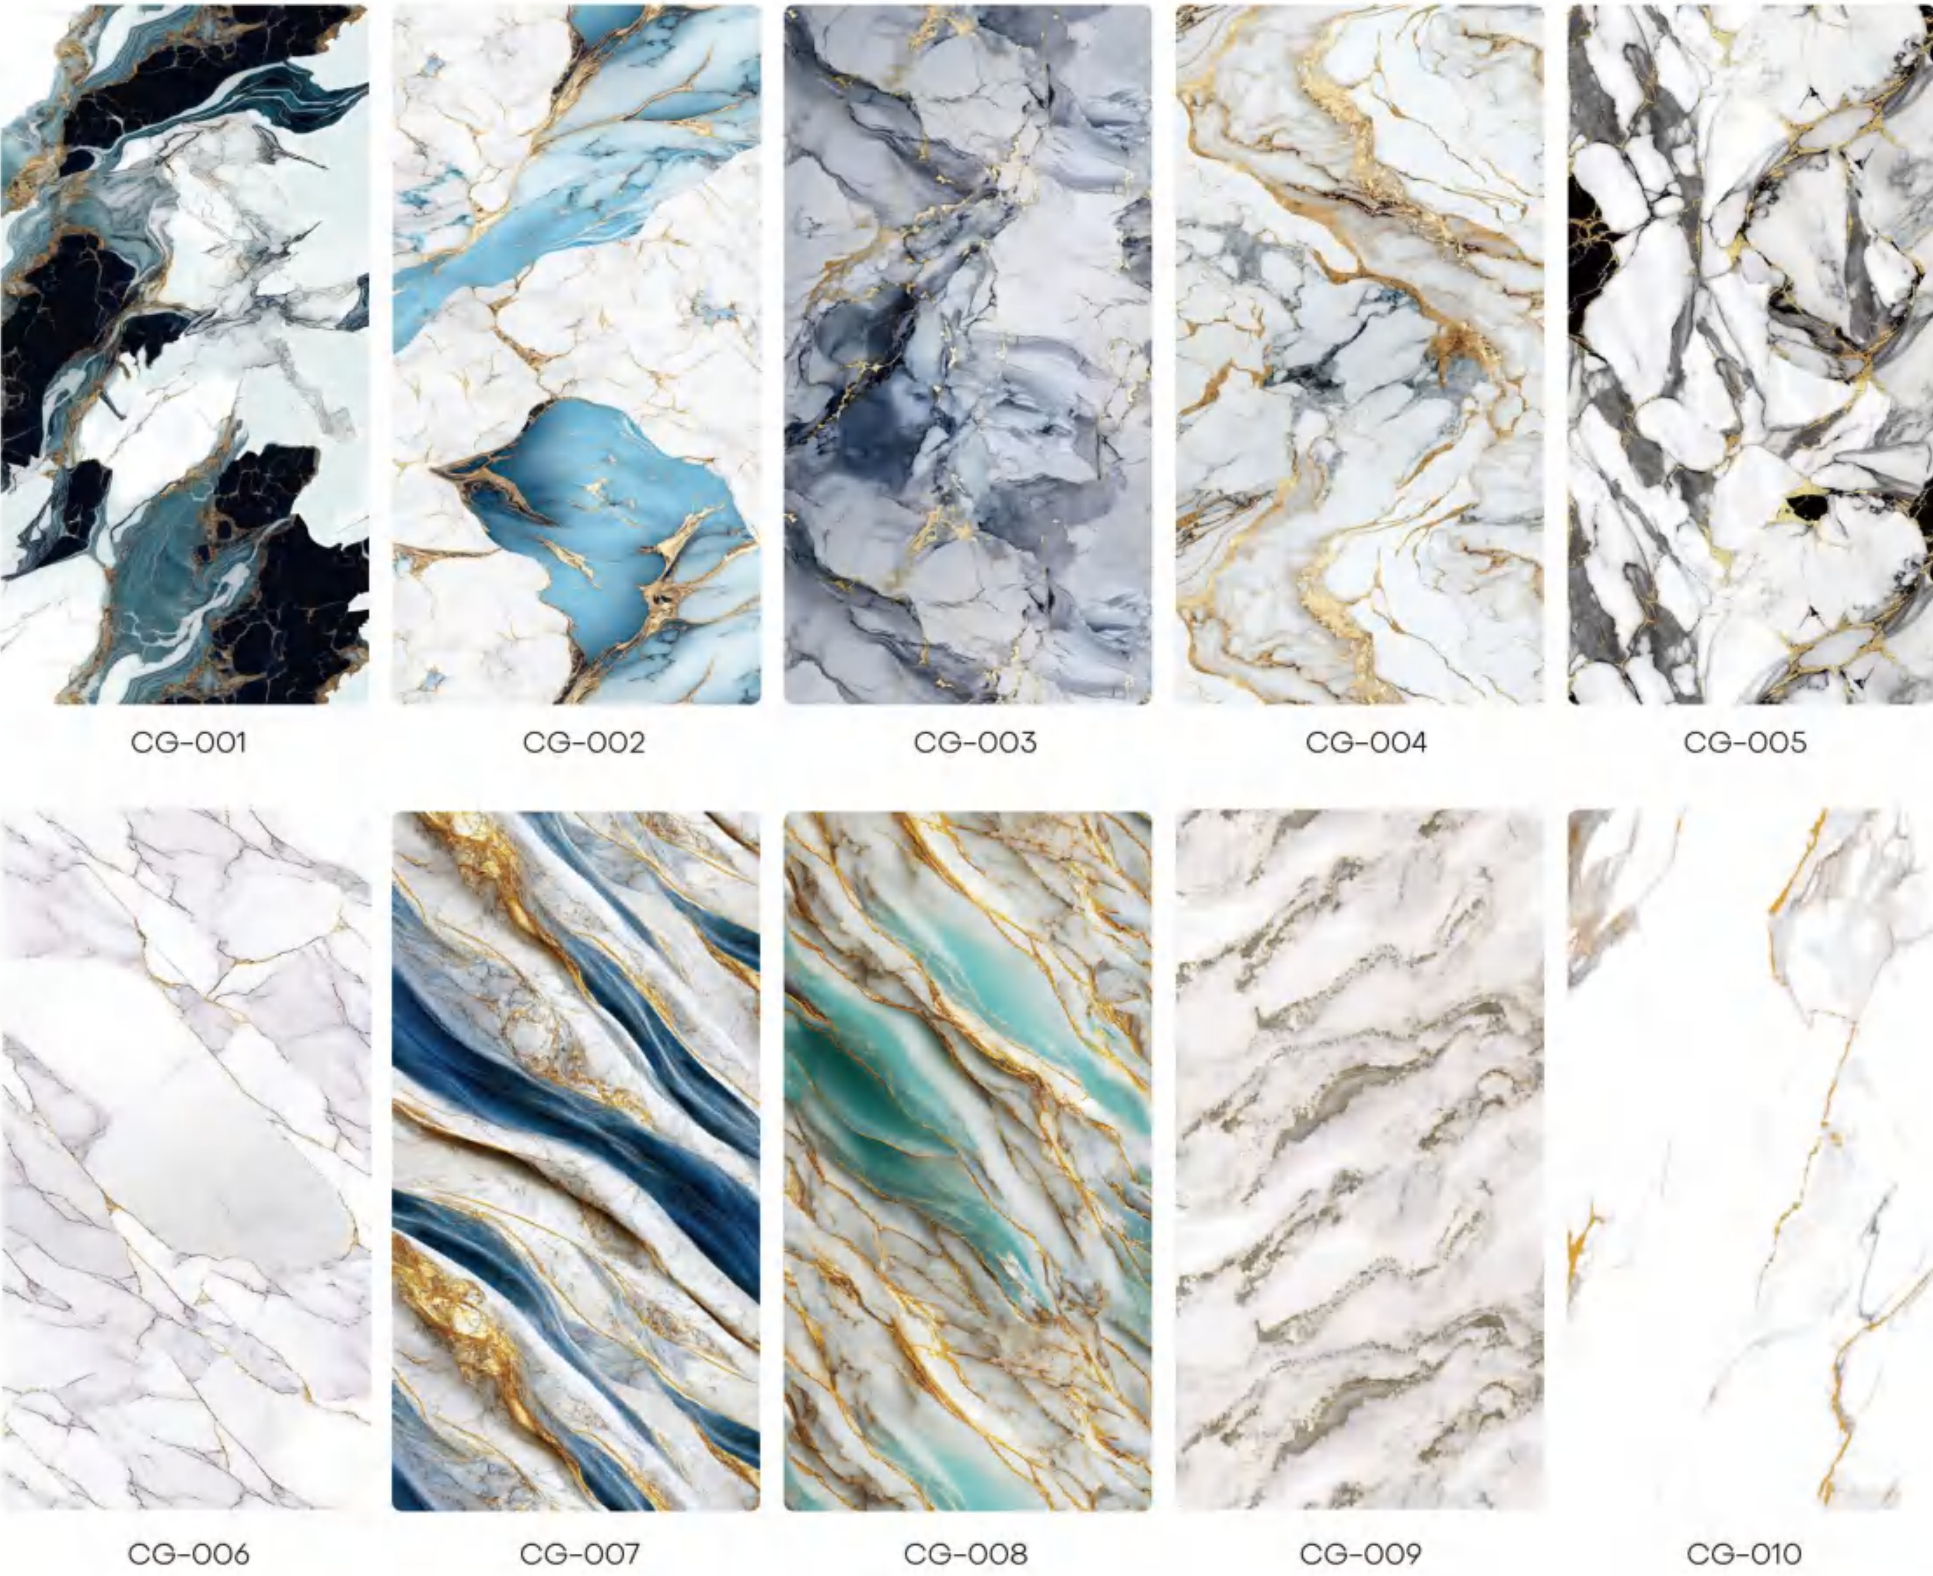

YMJ Series Marble Sheet.

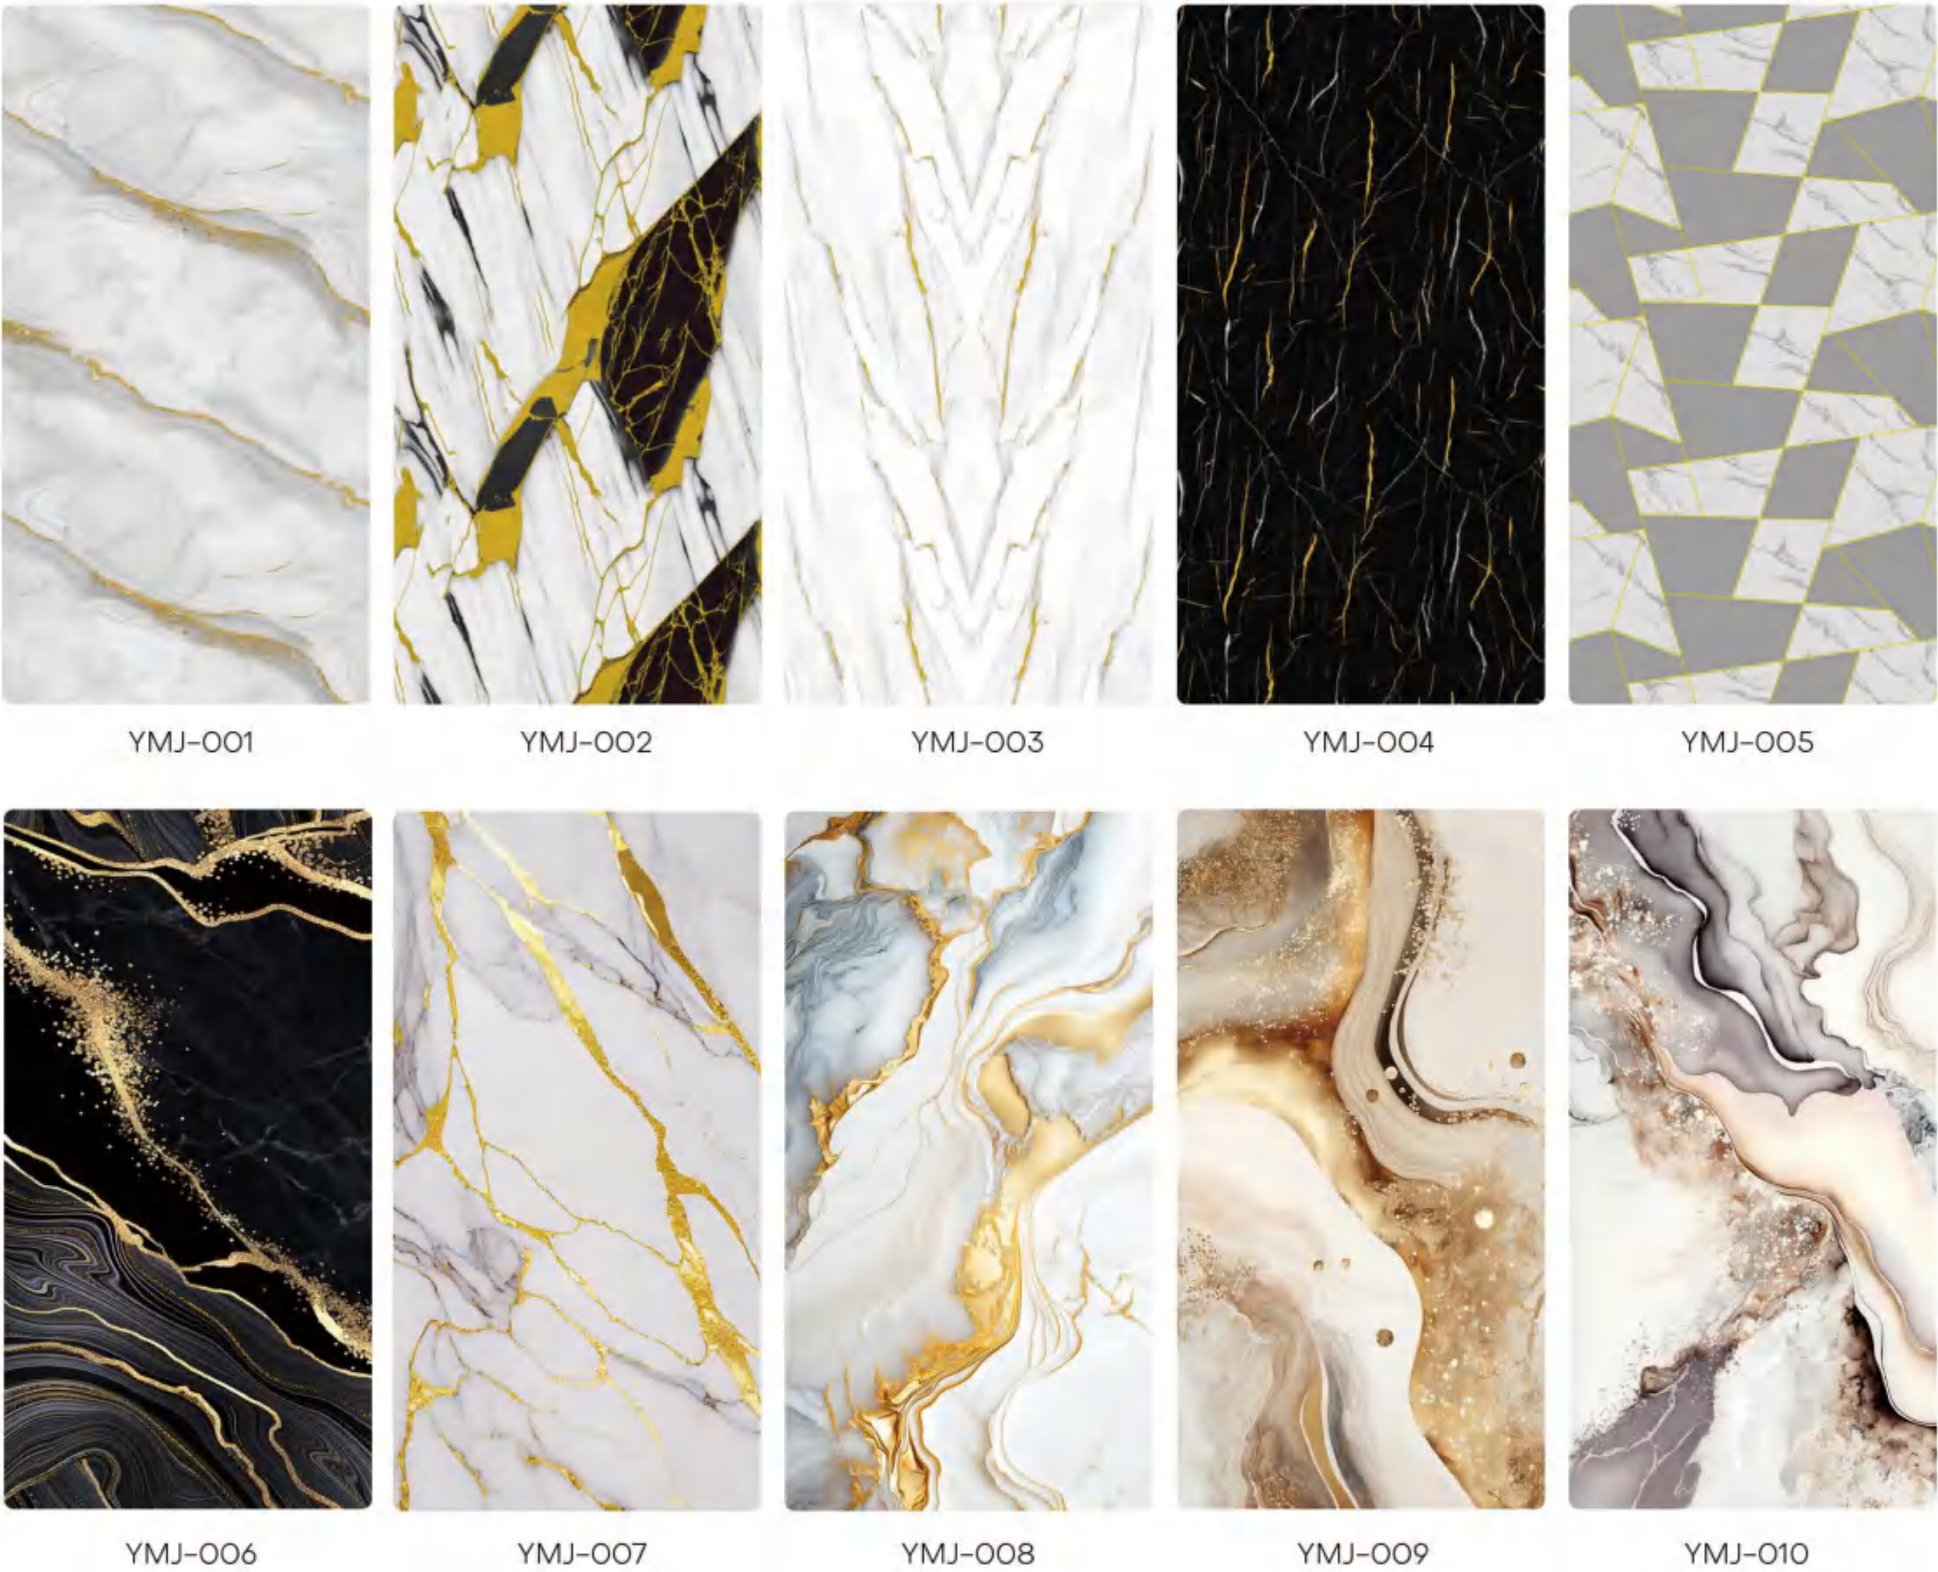





05

PVC Marble Sheet

Hot-selling product series

Heat Transfer Printing

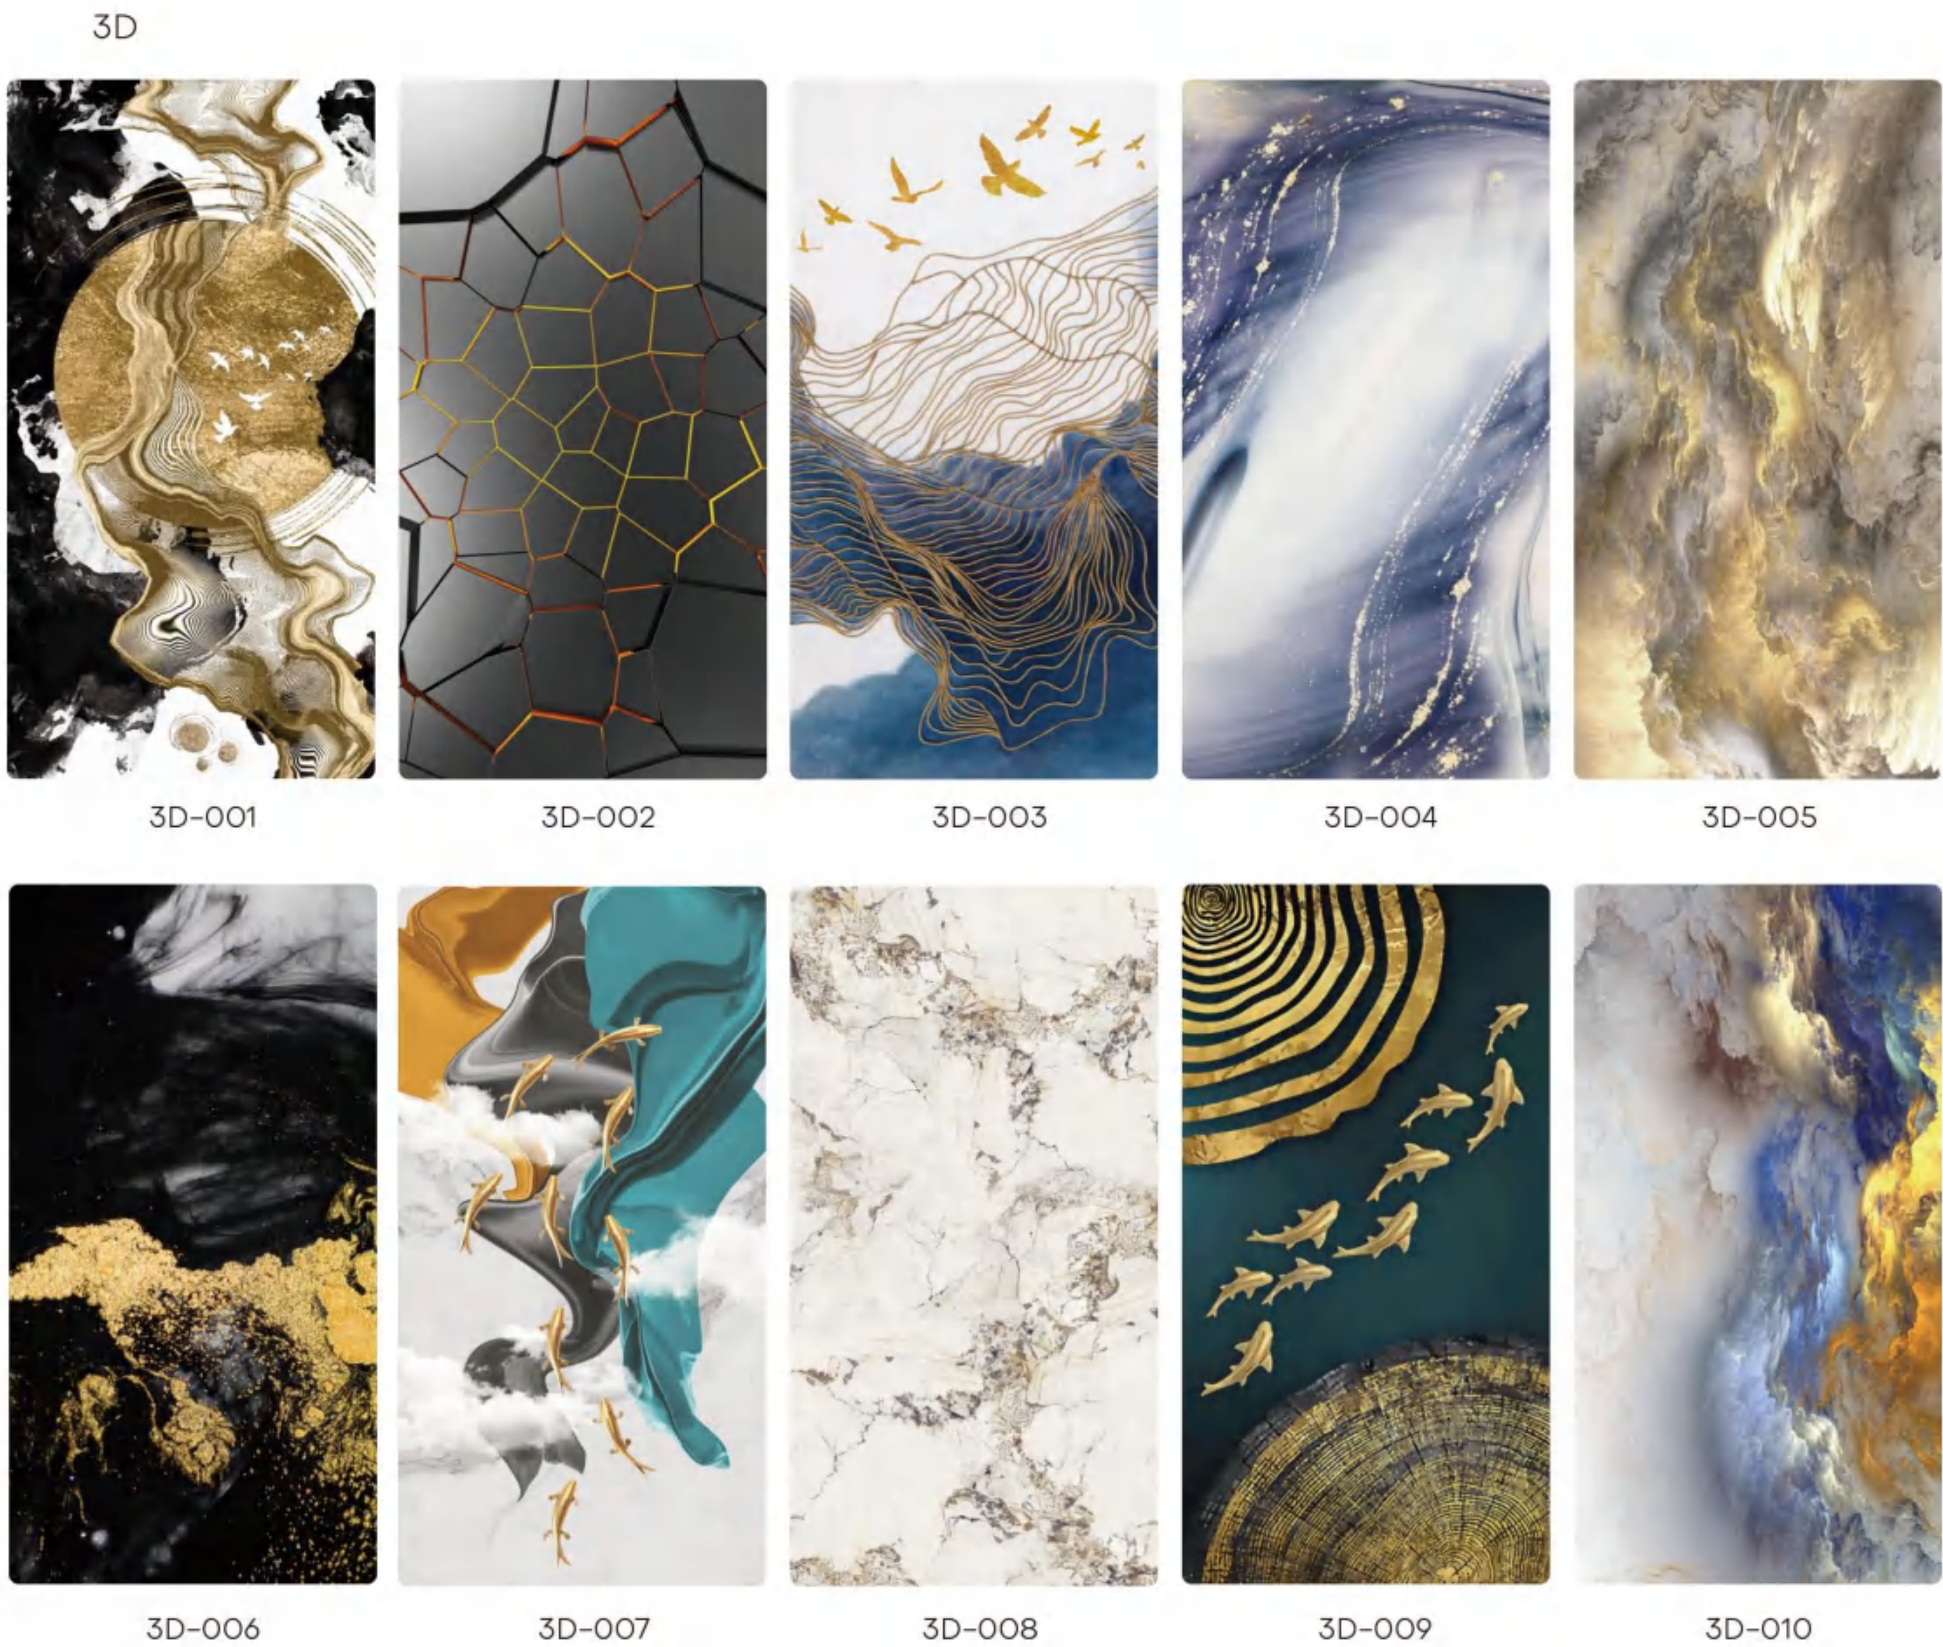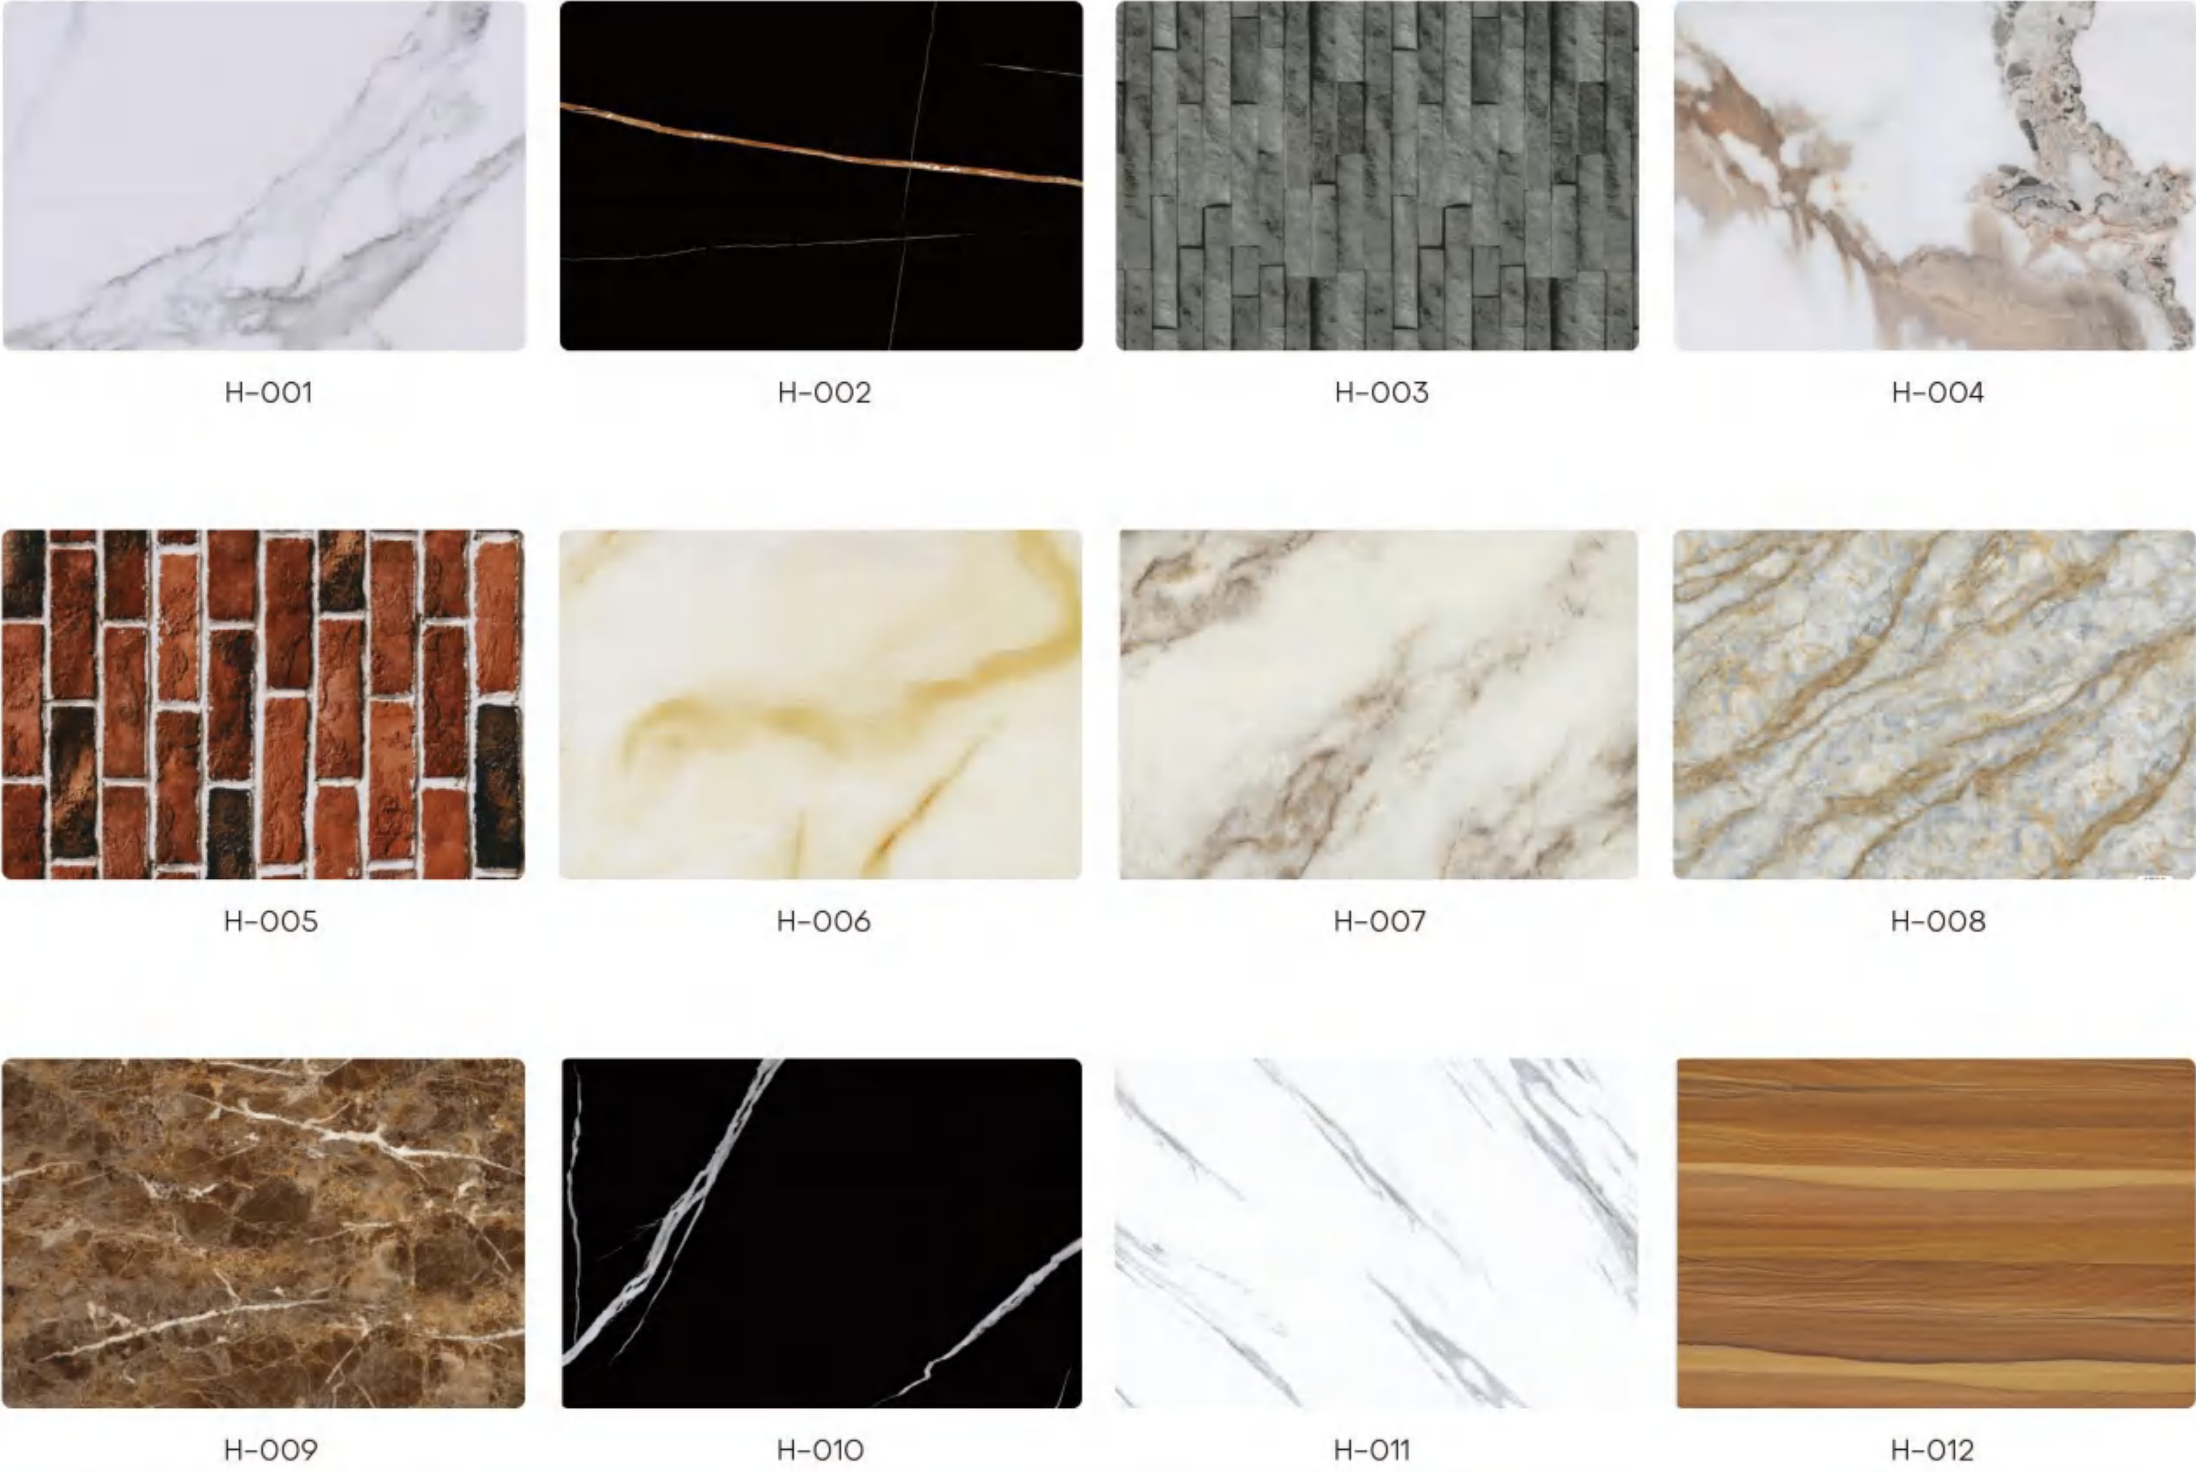



## 05 PVC Marble Sheet

### Installation Method



#### • Step 1

Measure the required dimensions.



#### • Step 2

Cut the UV wall panel with a utility knife.



#### • Step 3

Apply nail free glue to the back.



#### • Step 4


Paste it on the wall.



## 06 PS Wall Panel

### Hot-selling product series

PS wall panels are made from polystyrene (PS) and have low density, making them lightweight with good sound and thermal insulation. Widely used in construction and decoration, they are easy to install, durable, and have good seismic resistance. Additionally, they can be customized with paint or wallpaper for personalized decorative effects.

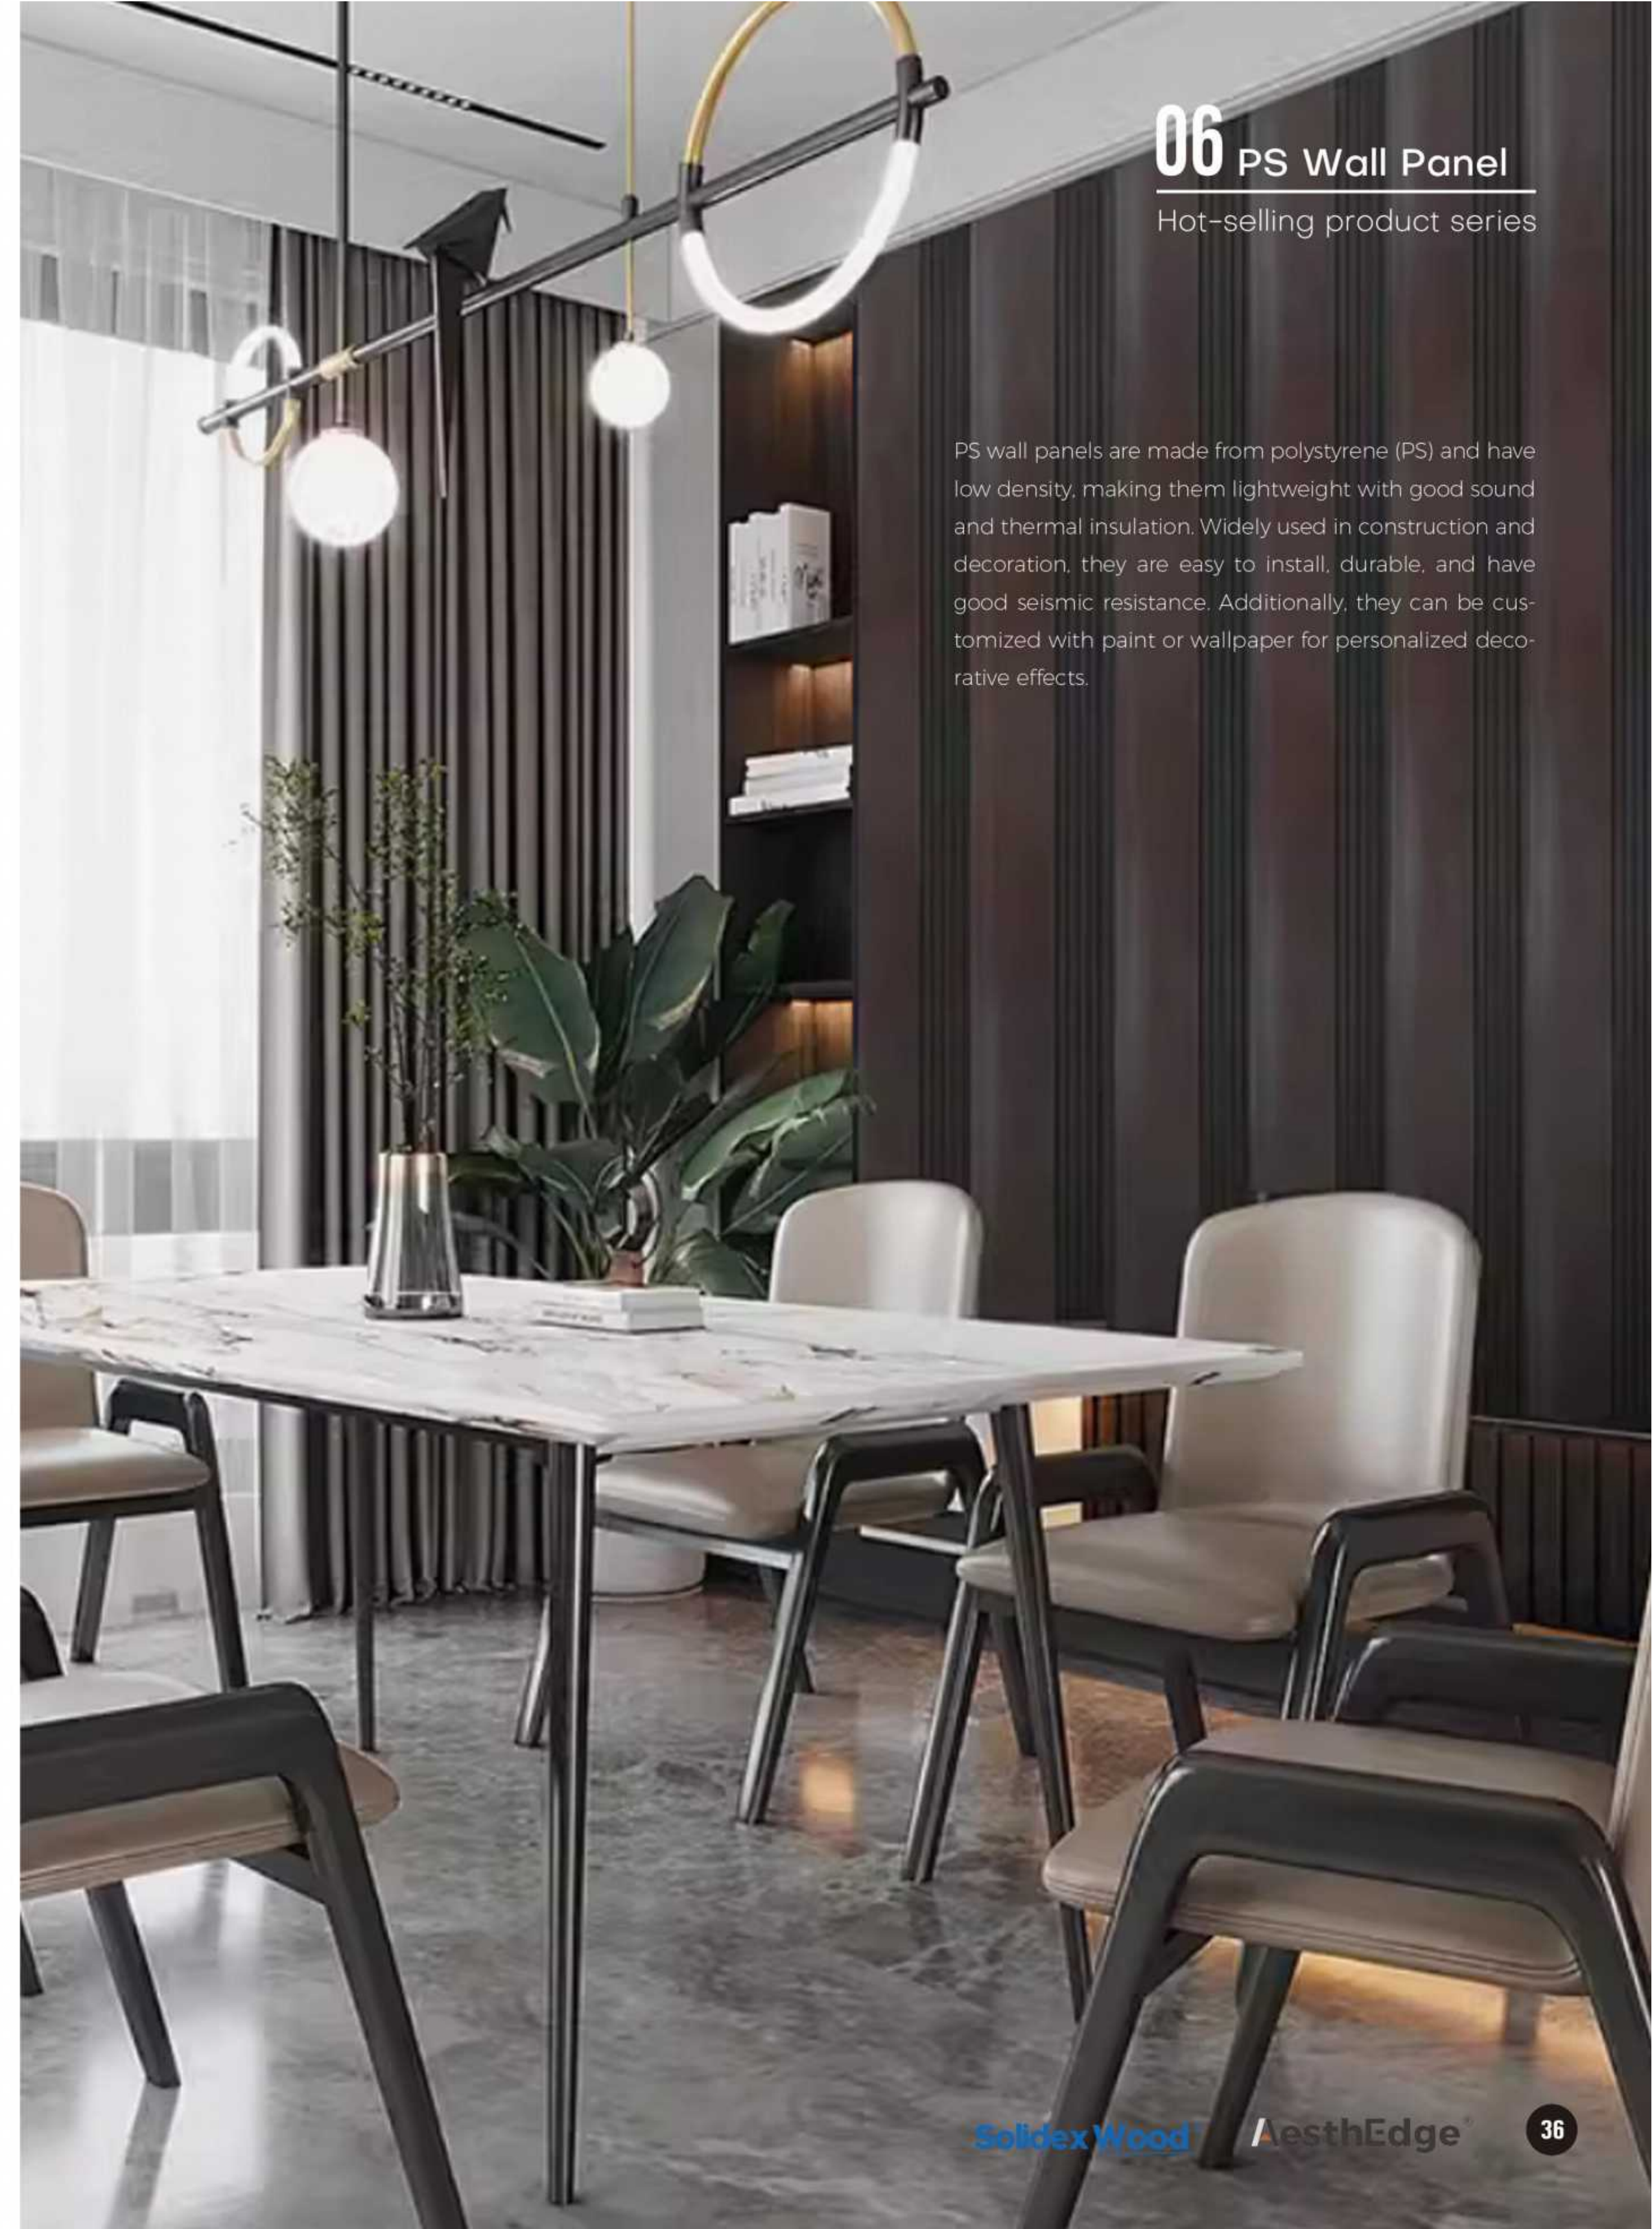




# 06 PS Wall Panel

Hot-selling product series


## CSW M01

W 160mm  
H 14mm  
L 2900mm

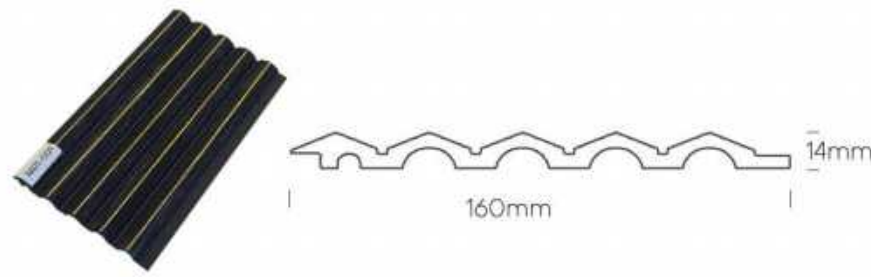


## CSW M09

W 150mm  
H 12mm  
L 2900mm

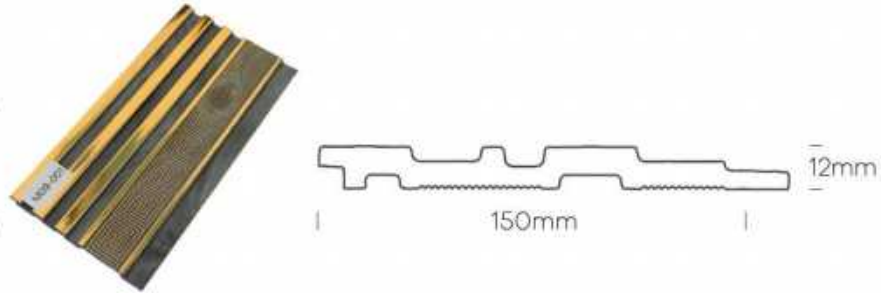


## CSW M02

W 120mm  
H 12mm  
L 2900mm

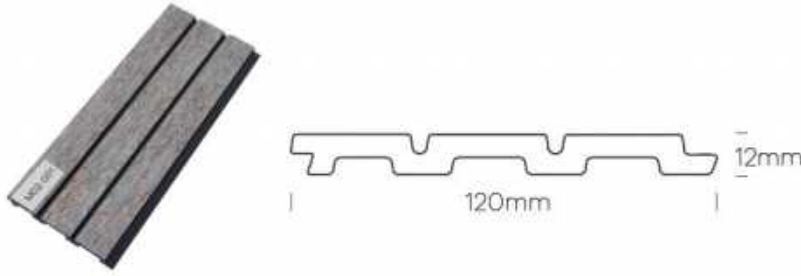


## CSW M10

W 160mm  
H 12mm  
L 2900mm

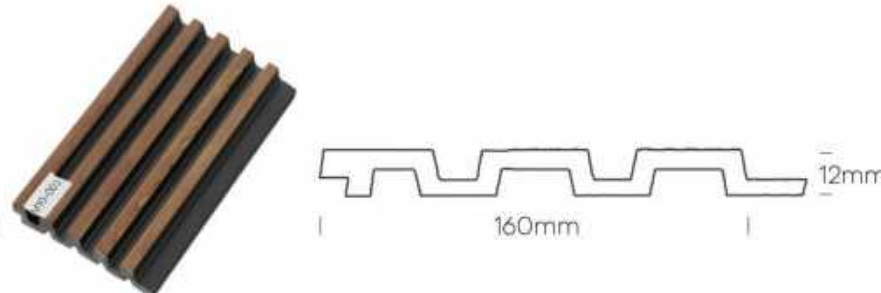


## CSW M03

W 120mm  
H 12mm  
L 2900mm

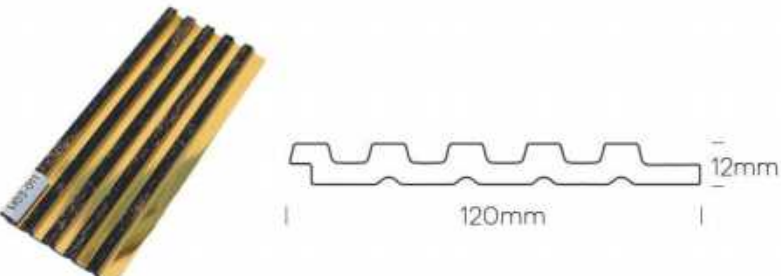


## CSW M11

W 120mm  
H 12mm  
L 2900mm

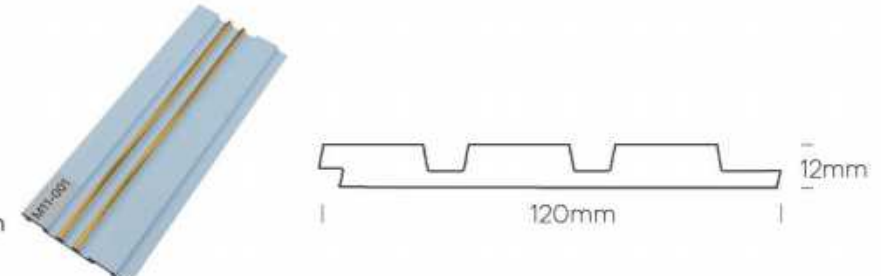


## CSW M04

W 150mm  
H 10mm  
L 2900mm

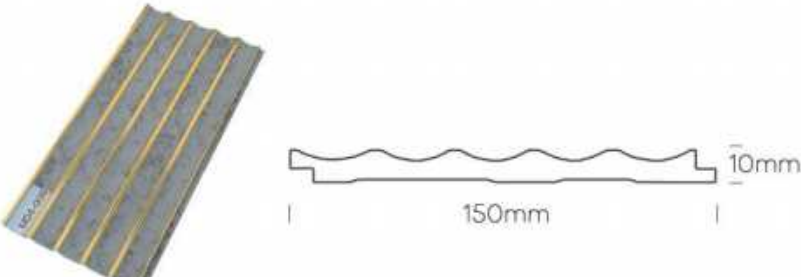


## CSW M12

W 120mm  
H 12mm  
L 2900mm

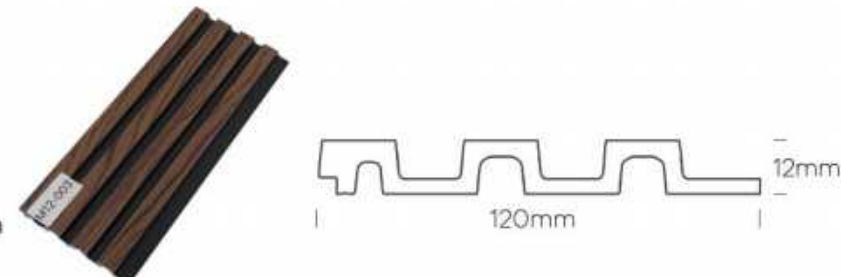


## CSW M05

W 120mm  
H 10mm  
L 2900mm

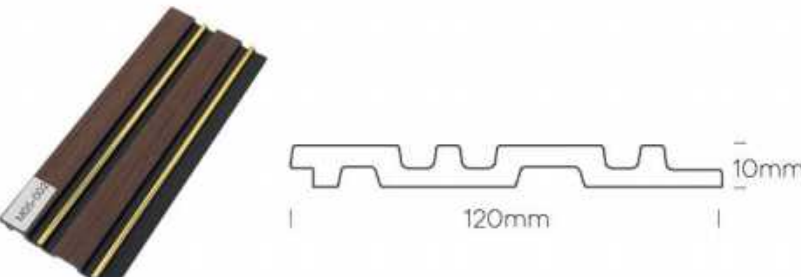


## CSW M13

W 120mm  
H 11.2mm  
L 2900mm

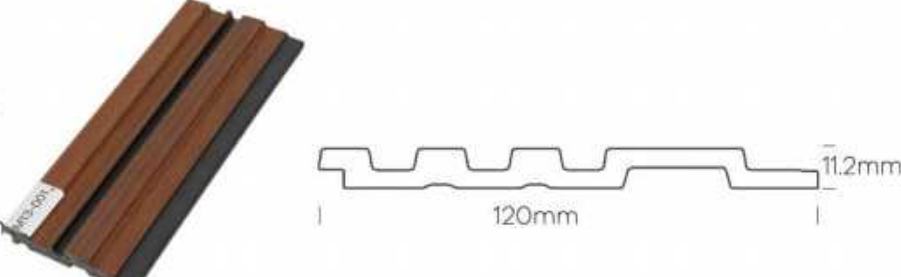


## CSW M06

W 120mm  
H 20mm  
L 2900mm

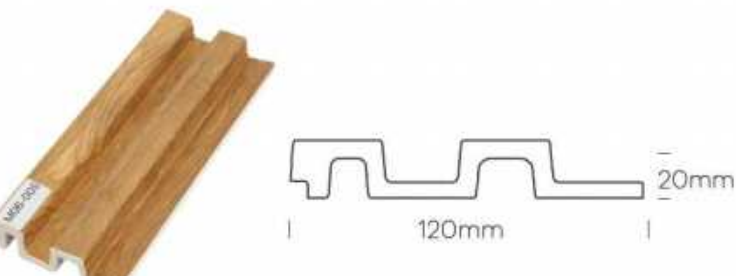


## CSW M14

W 120mm  
H 12mm  
L 2900mm

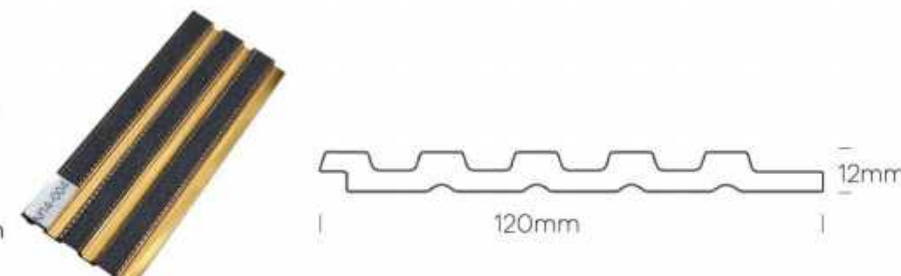


## CSW M07

W 120mm  
H 12mm  
L 2900mm

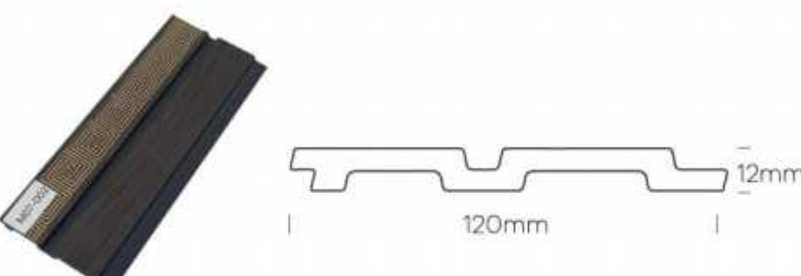


## CSW M15

W 120mm  
H 12mm  
L 2900mm

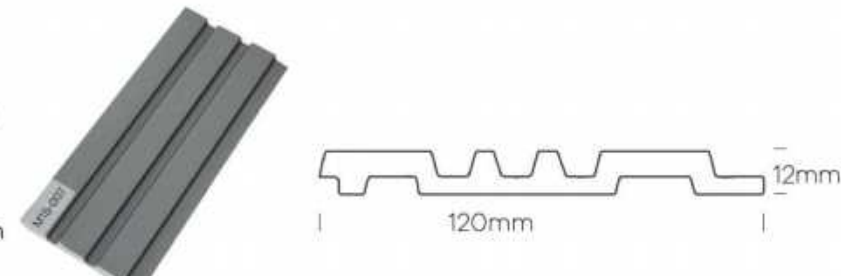


## CSW M08

W 160mm  
H 12mm  
L 2900mm

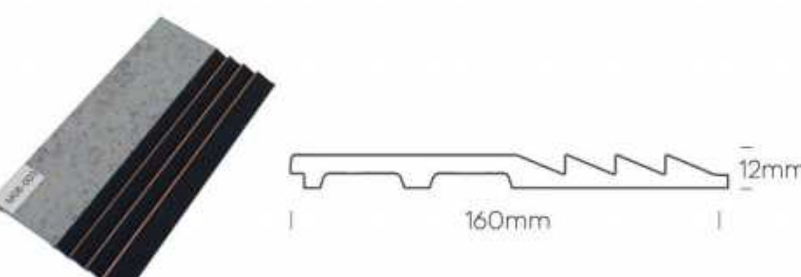


## CSW M16

W 160mm  
H 20mm  
L 2900mm

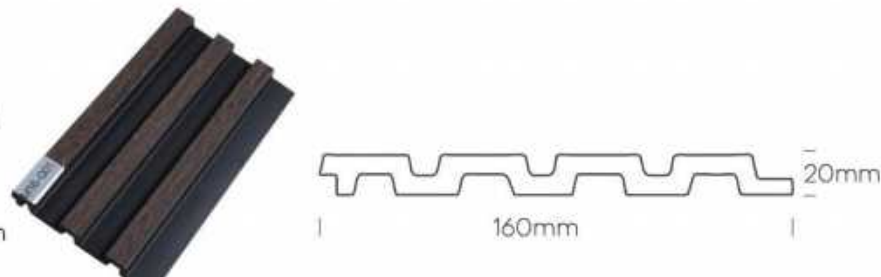


## CSW S01

W 300mm  
H 7mm  
L 2900mm

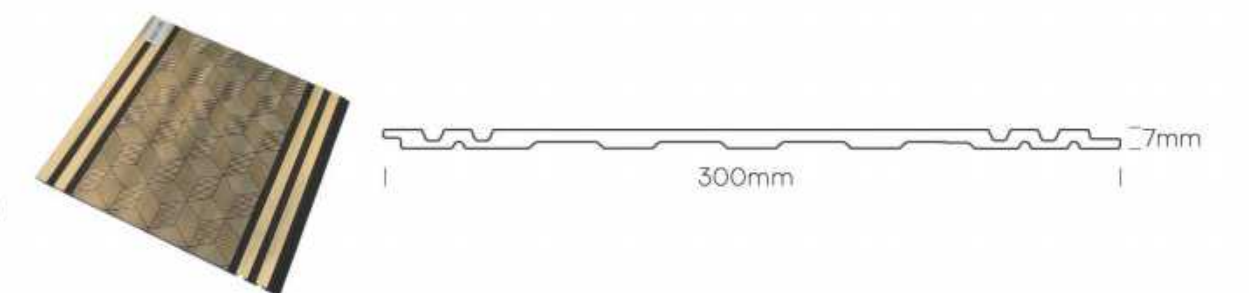


## CSW S02

W 300mm  
H 7mm  
L 2900mm

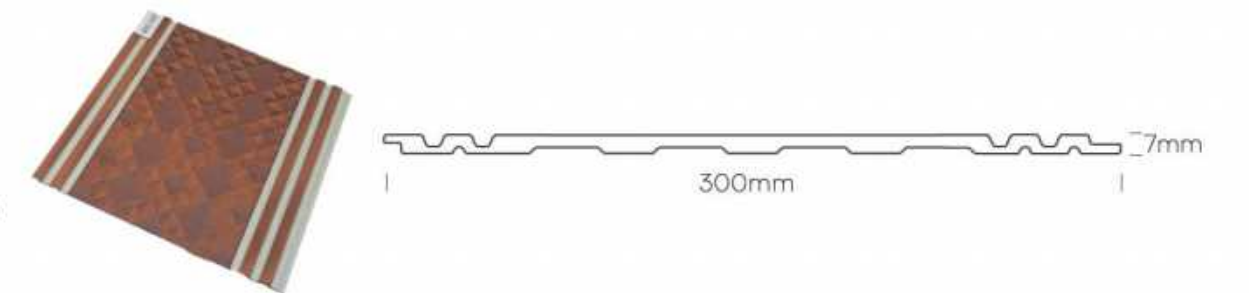


## CSW S03

W 300mm  
H 7mm  
L 2900mm

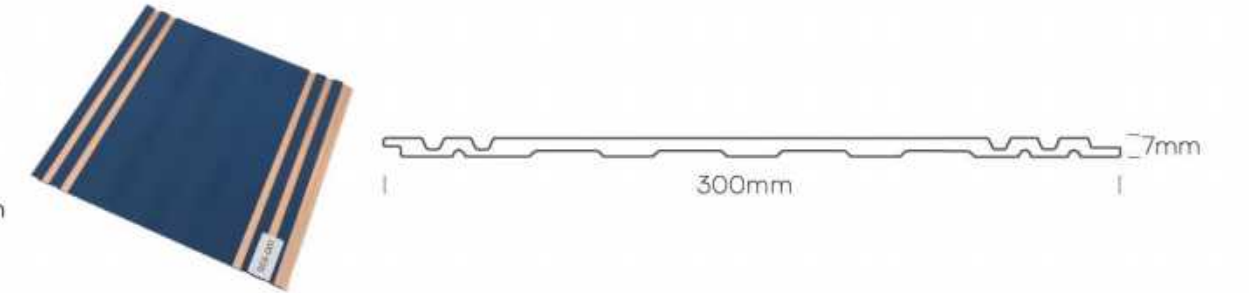


## CSW S04

W 300mm  
H 7mm  
L 2900mm

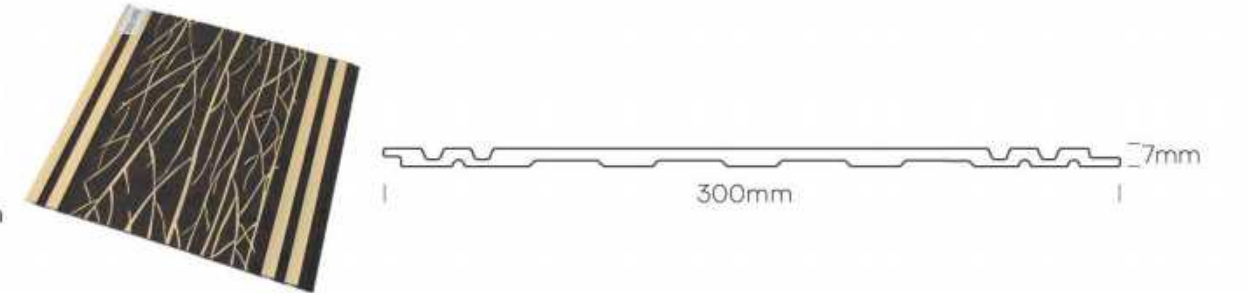


## CSW S05

W 300mm  
H 7mm  
L 2900mm

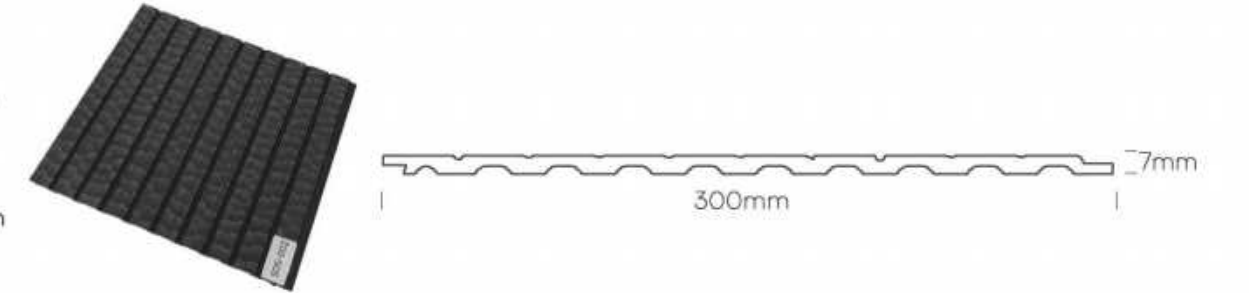


## CSW S06

W 300mm  
H 7mm  
L 2900mm

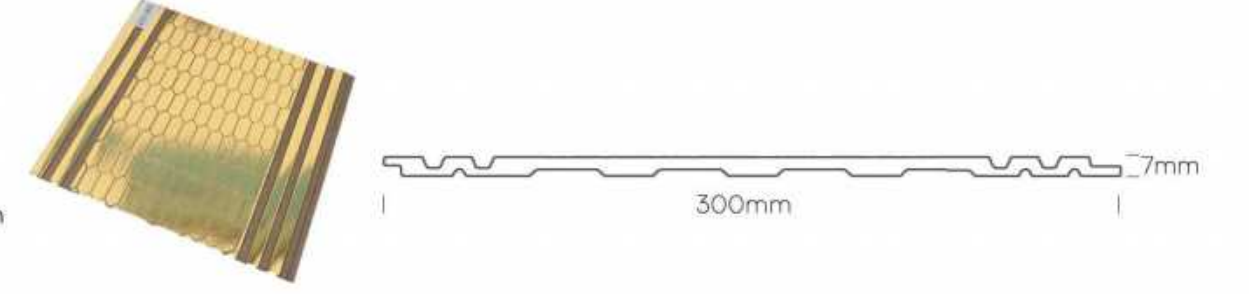

## CSW S07


W 300mm  
H 8mm  
L 2900mm

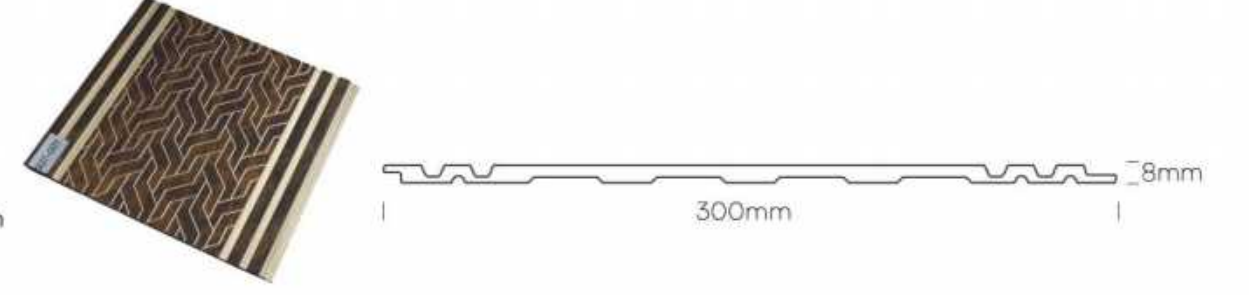




## 06 PS Wall Panel


Installation Method

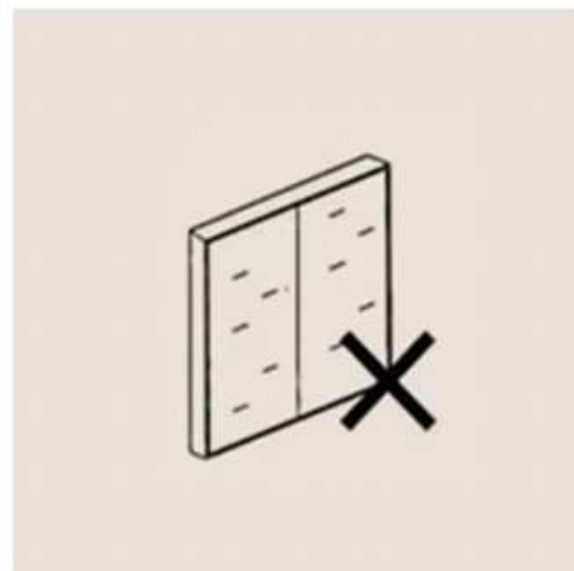


- **Step 1**  
Clean the wall surface thoroughly and ensure it is flat.

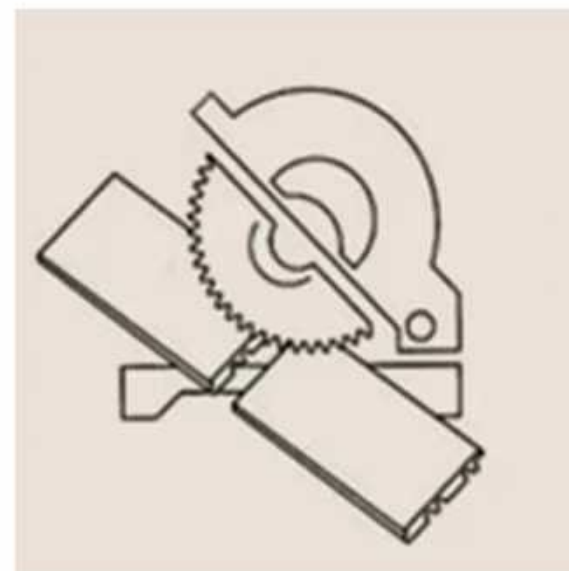

- **Step 2**  
Measure and cut the panels to fit.

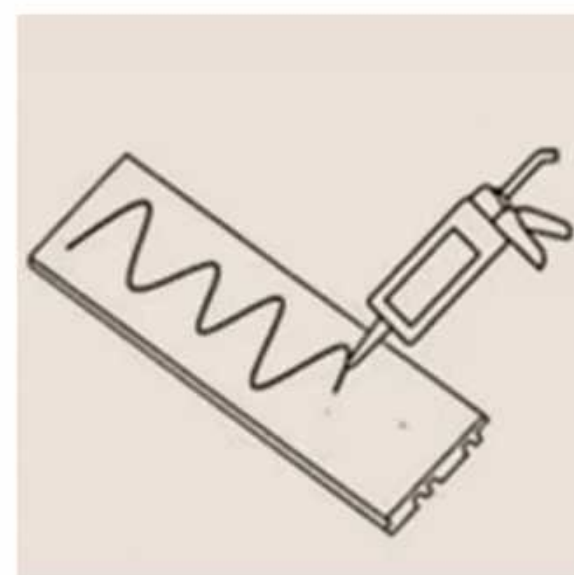

- **Step 3**  
Apply nail free glue to the back.

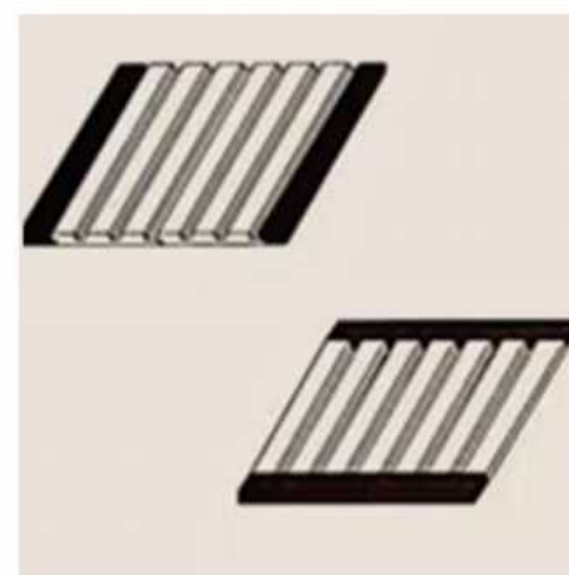

- **Step 4**  
Complete the installation.

## 07 Slat Acoustic Panel

Hot-selling product series








# 07 Slat Acoustic Panel

Hot-selling product series

Slat Acoustic Panels provide an excellent look and improve acoustics by absorbing echoes and reverberations, making the room environment more pleasant. In the use stage, the Slat Acoustic Panels itself will not release harmful substances and can be widely used on walls and ceilings in living rooms, corridors, kitchens, children's rooms, bedrooms, and offices. They are also suitable for public spaces, shops, restaurants, and more.

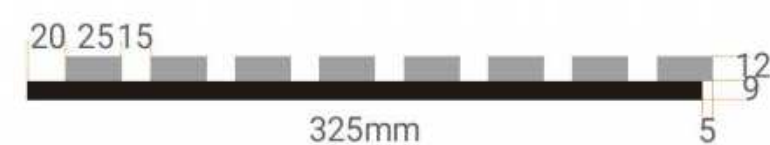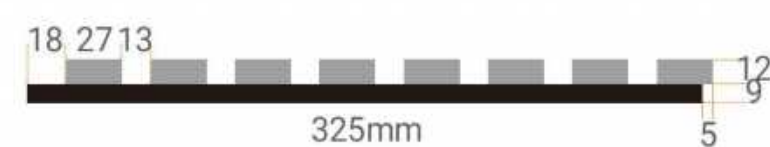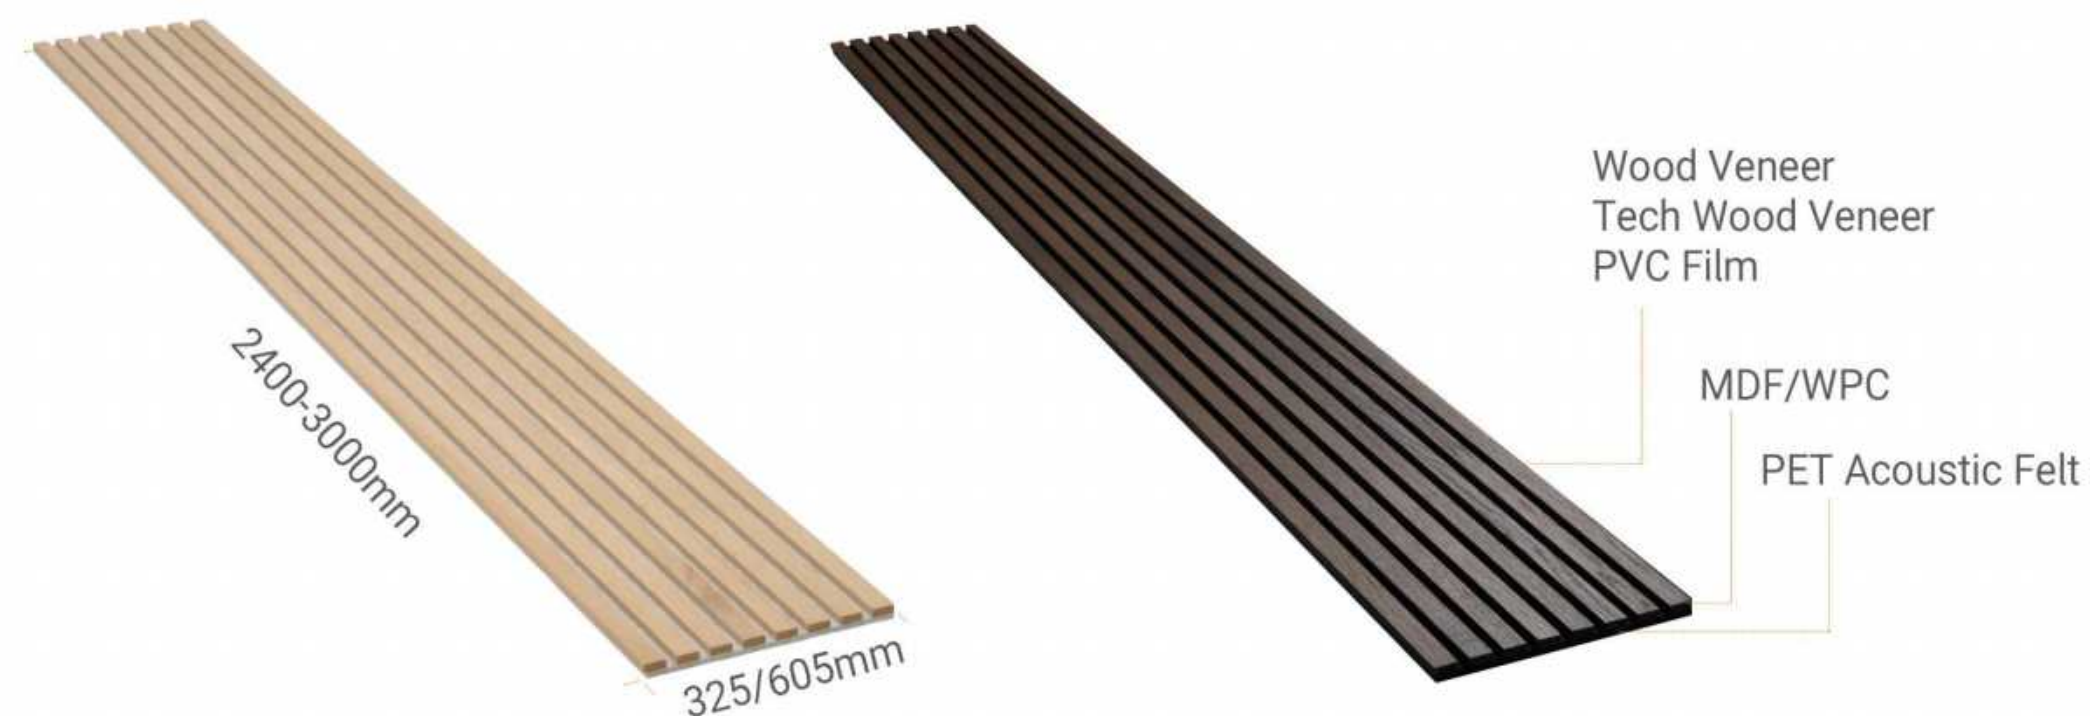

Full Panel Size: 2400~3000mm × 600/320mm × 22mm

\*We have more other customized size

## Slat Acoustic Panel Feature



### Solid wood texture

Getting Inspiration From The Nature We have elegant wood designs. You could feel the wood texture with embossing surface.



### Absorb the noise and Sound insulation

Absorbs echo and reverberation, makes room environment more pleasant some says it reduces even headaches.



### Easy to install

Installation of acoustic panels can be done with minimal construction skills, DIY



### Moistureproof Environmental protection

We insist on our enterprise mission of leaving the forest to nature and letting humans enjoy the green world, no forest destruction, and no environmental pollution while offering the world healthier, more environmentally friendly decor coverings.



Technical Wood Veneer



Natural Wood Veneer




07 Slat Acoustic Panel  
Hot-selling product series



Smoked Dyeing



PVC Three-side Covered

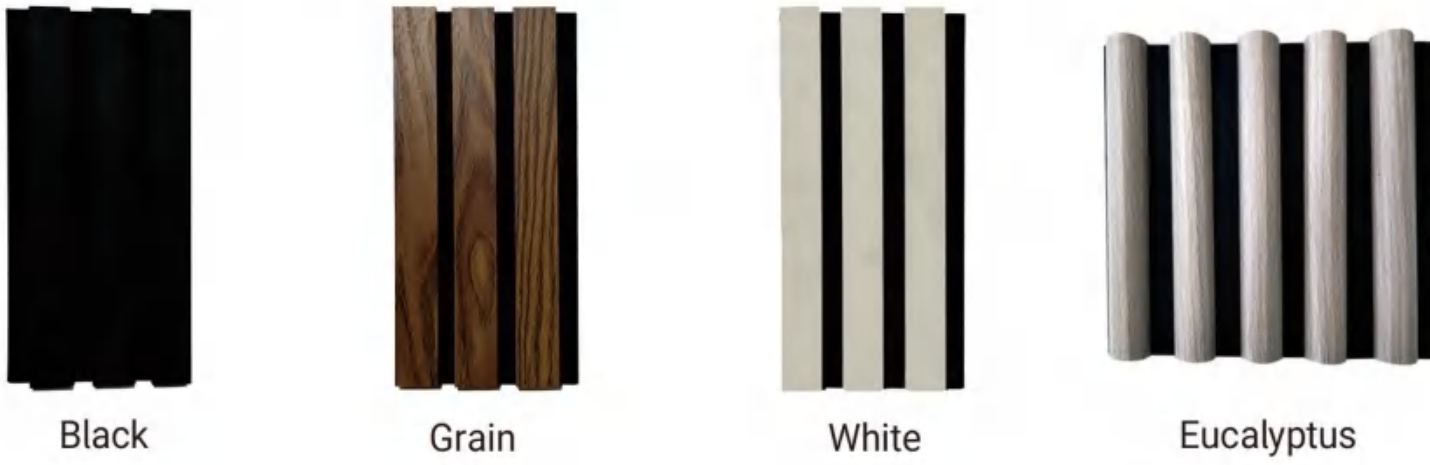




# 07 Slat Acoustic Panel

Hot-selling product series



## Special Shape Wood Veneer

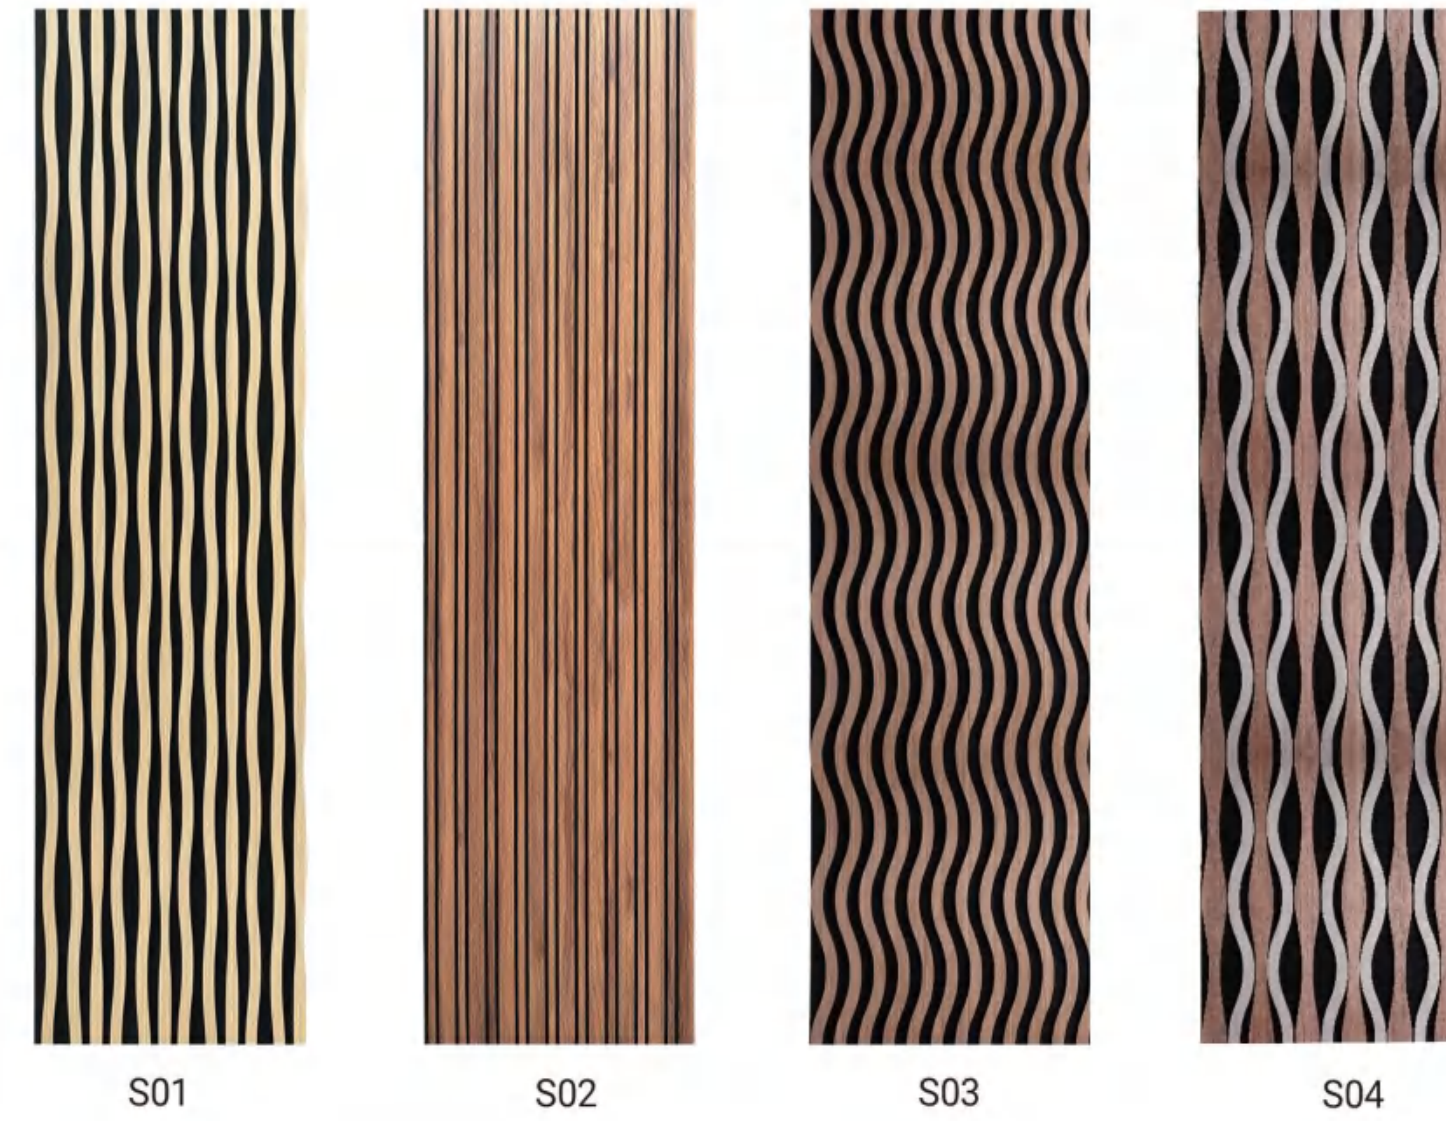


## Technical Wood Veneer







Square Technical Wood Veneer

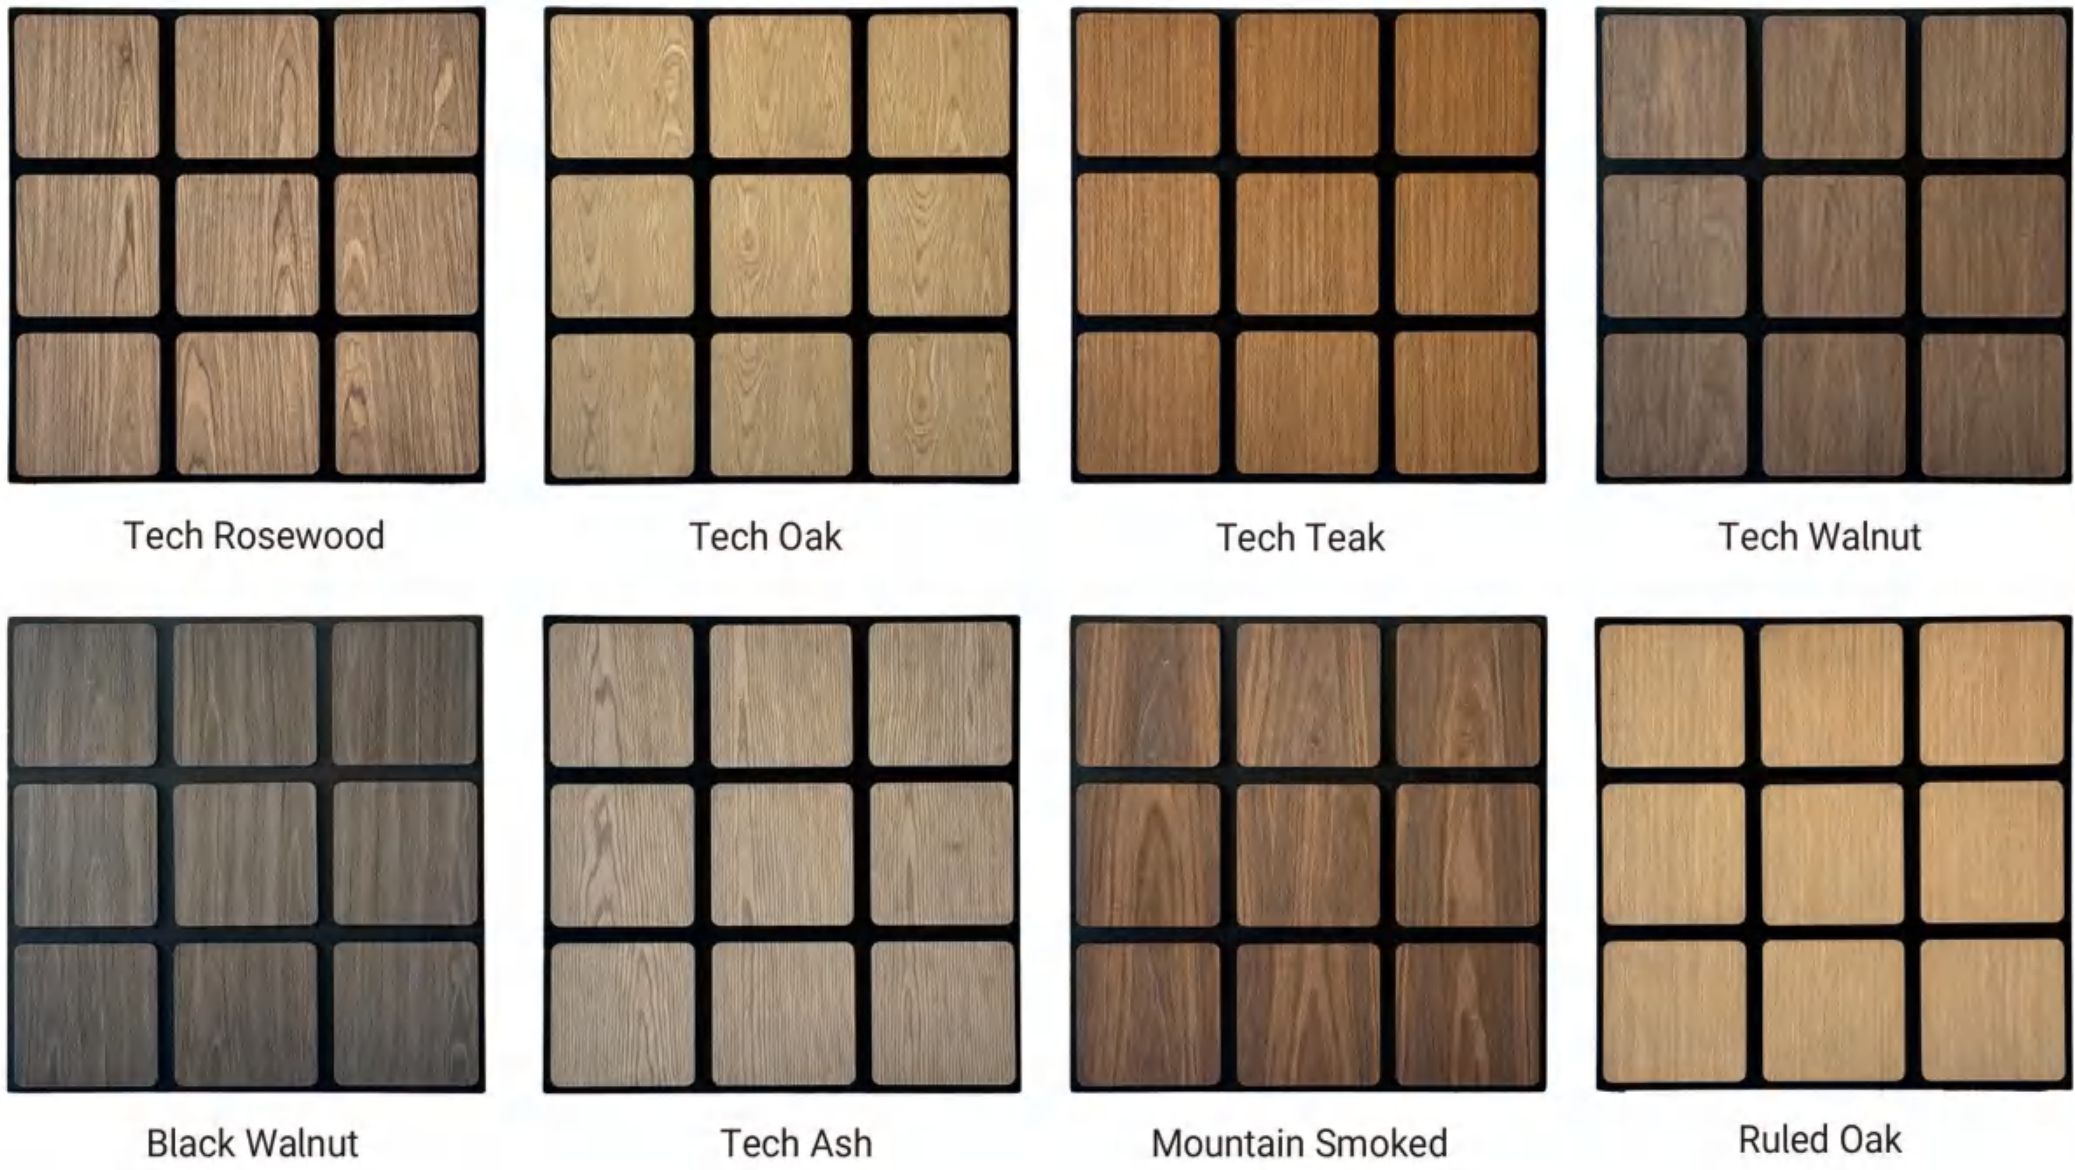

Puzzle Wall Panel

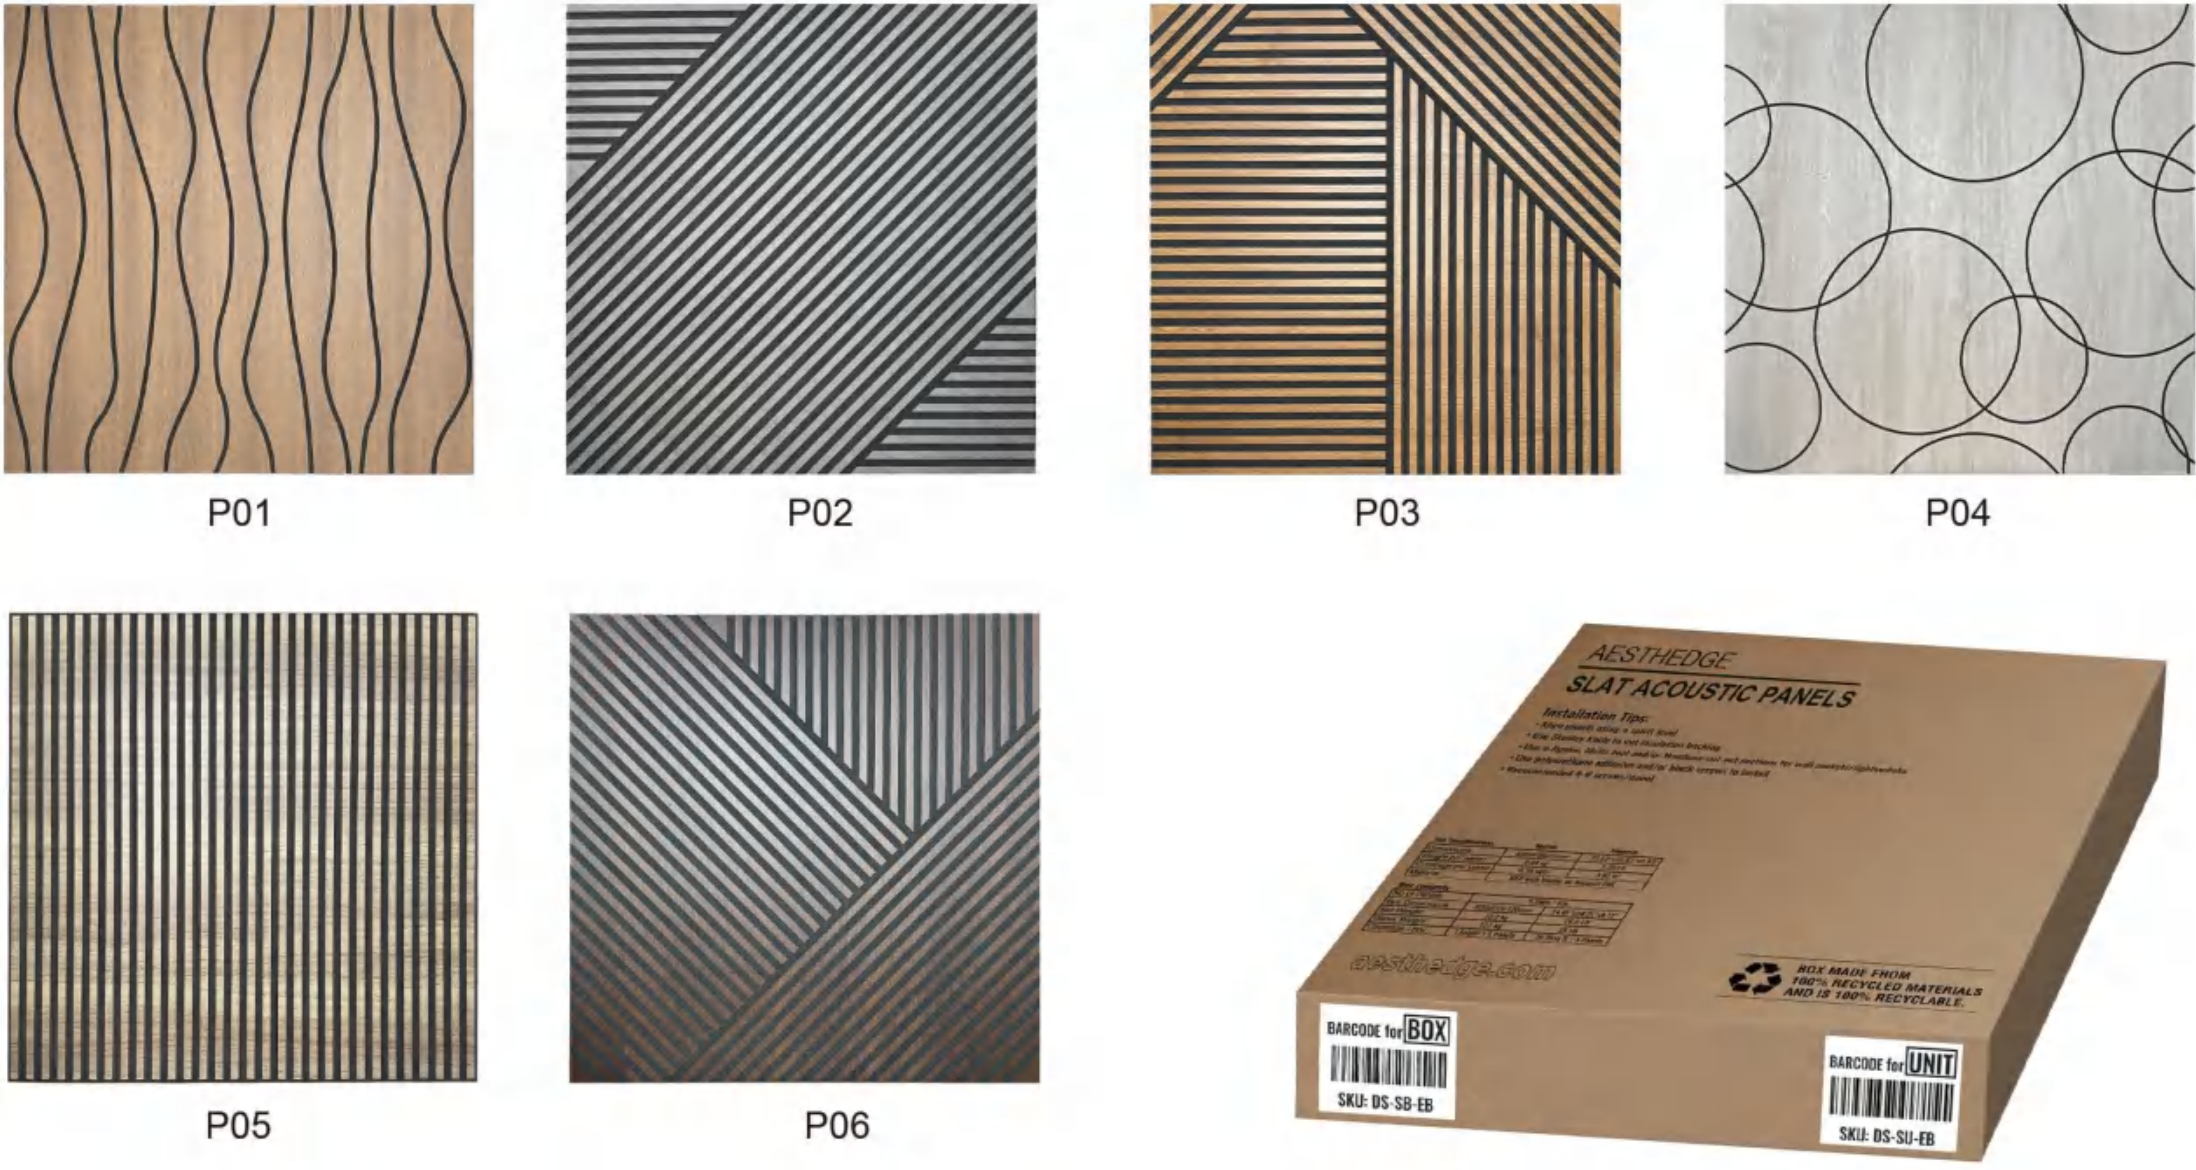

Hexagon Technical Wood Veneer

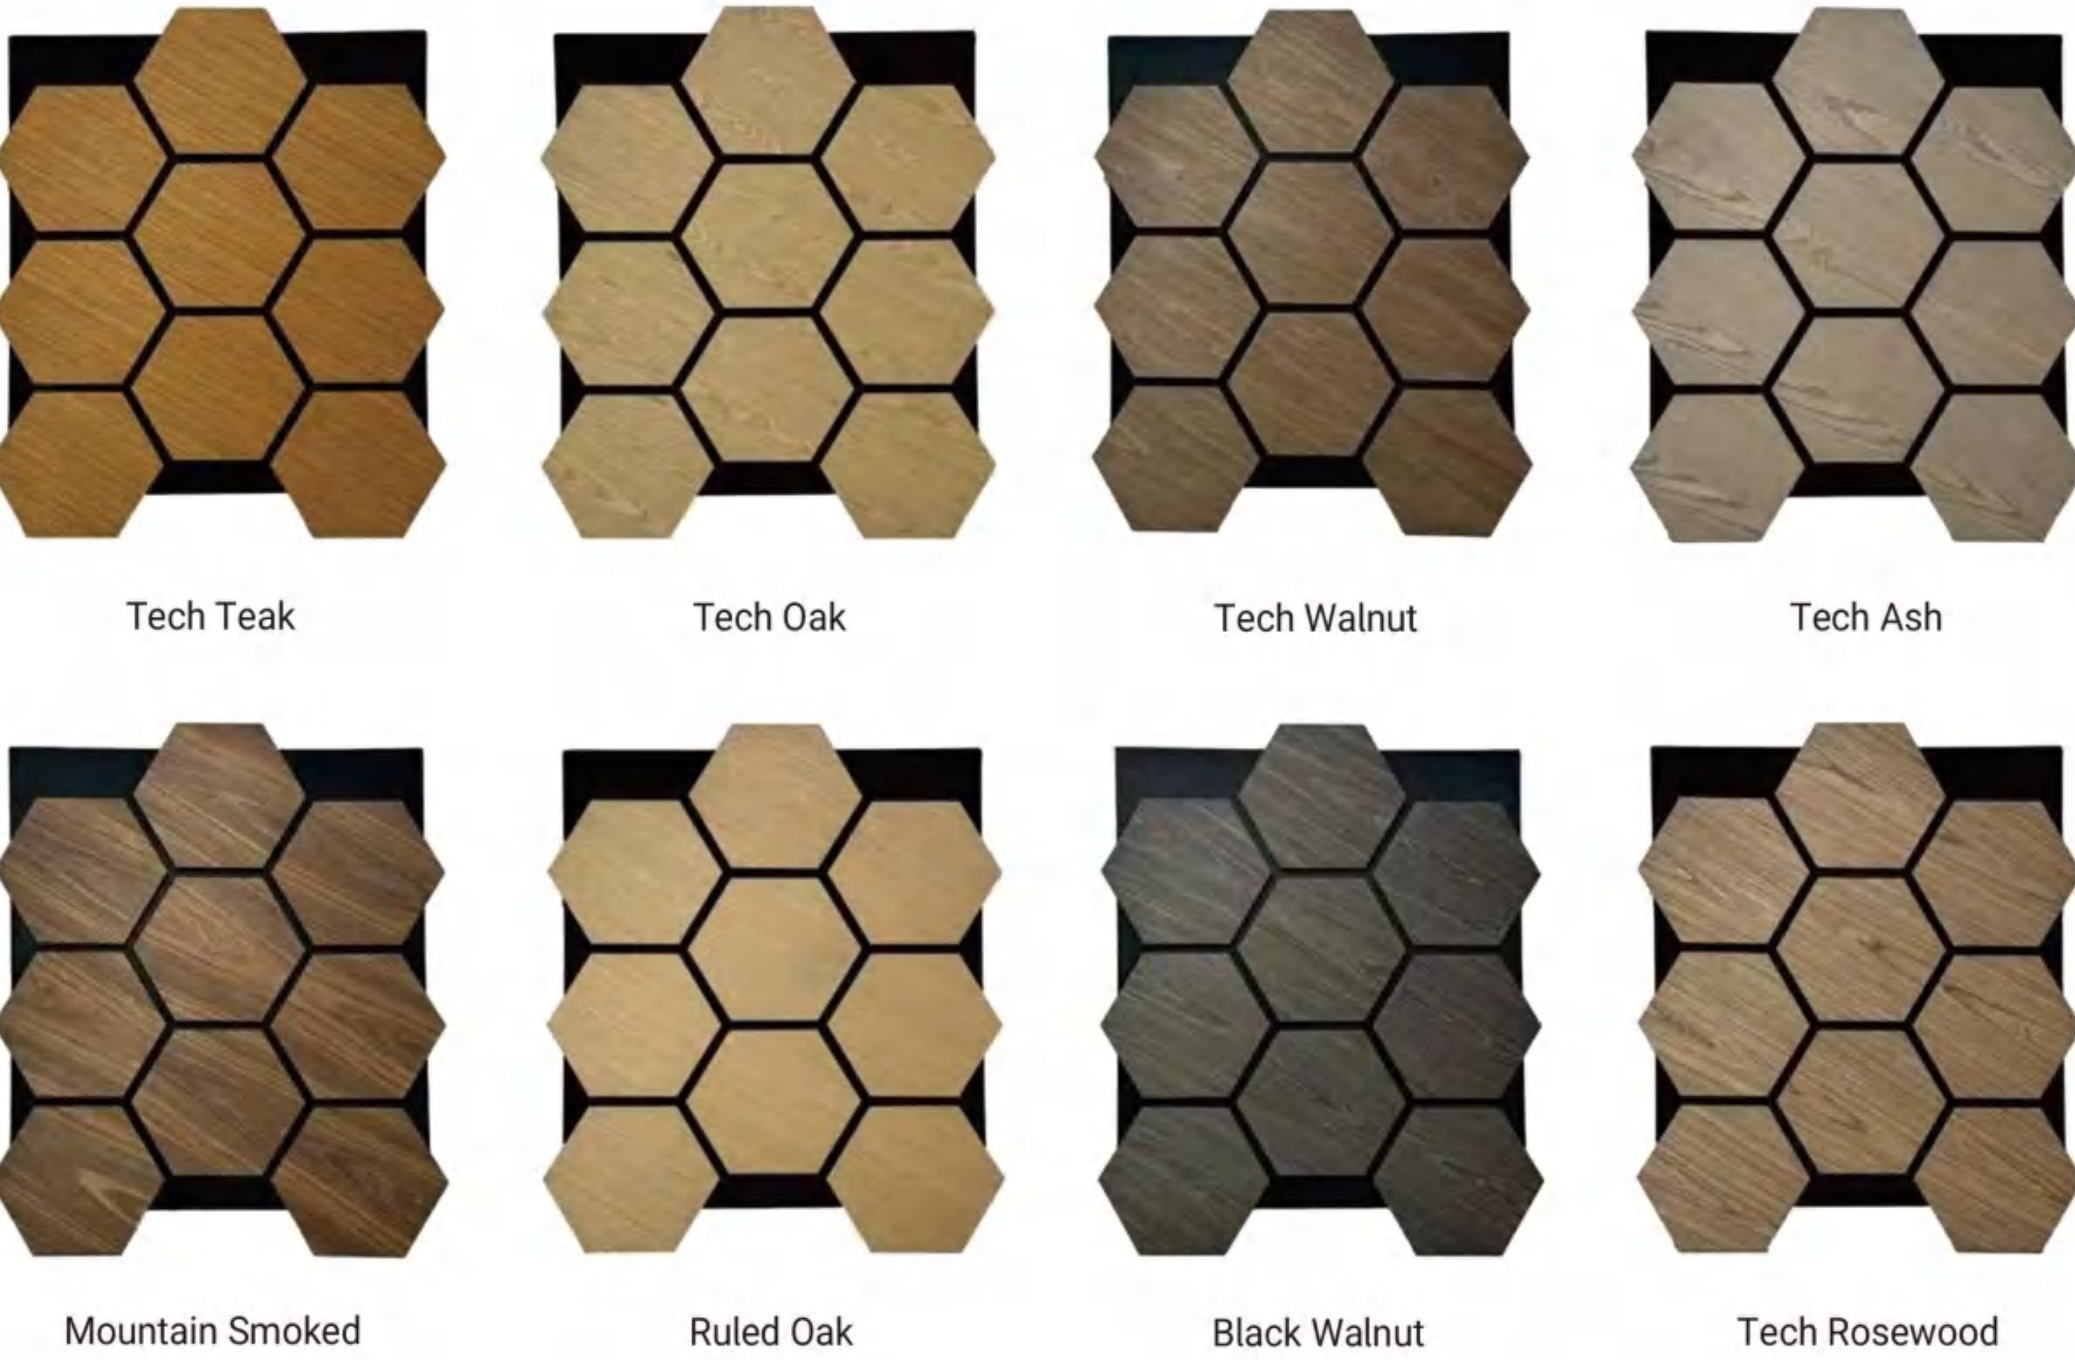




## 07 Slat Acoustic Panel

### Installation Method


#### ◦ Installation

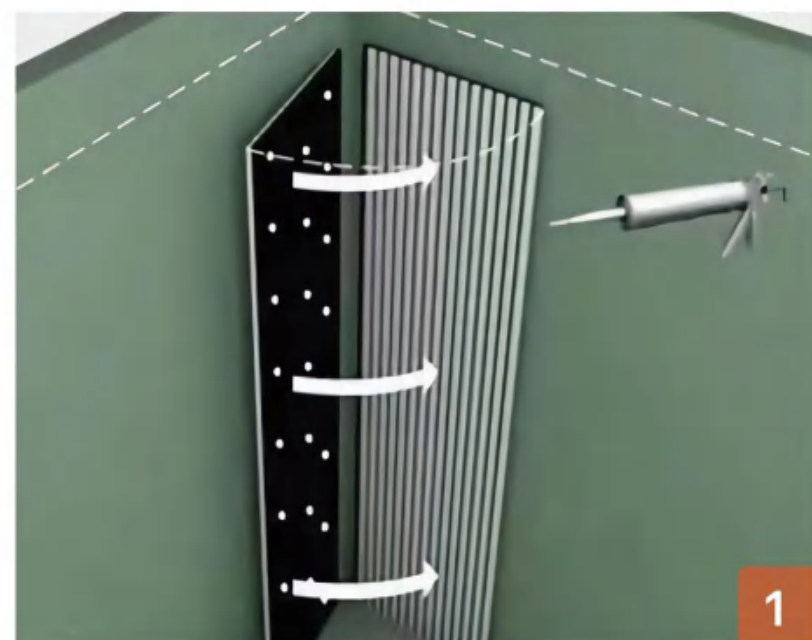

#### ◦ Methods 1

##### Glue Installation

Directly use construction adhesive or structural adhesive to stick it to the wall.

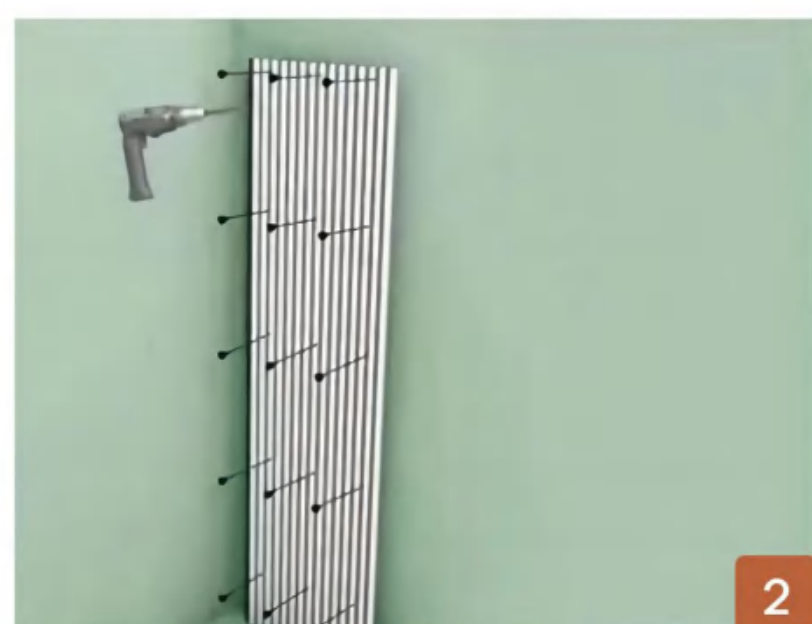

#### ◦ Methods 2

##### Screw Installation

Use black screws to attach the backing board to the wall through the polyester acoustic panel. It is recommended to use at least 9 screws per grille panel.



#### Methods 3

##### Wooden Battens

Directly screw the grille panel into the wooden battens. For optimal sound absorption, use polyester fiber acoustic panels and leave space behind the panels for Rockwool. This combination will achieve better sound absorption.

## 08 PU Stone Panel

### Hot-selling product series





08 PU Stone Panel

Hot-selling product series

Pu Stone refers to polyurethane stone, also known as artificial rock. It is an artificial stone made from materials such as polyurethane resin, fillers, and pigments through a series of processes.



PU MOUNTAIN ROCKS

Thickness: 10-80mm  
600mm\*1200mm\*70mm



PU STONE SKIN

Thickness: 35mm  
600mm\*1200mm\*35mm



PU Shale Stone      PU Stone Skin      PU Mushroom Stone



08 PU Stone Panel

Hot-selling product series


STACKED PEAK STONE

Thickness: 10-80mm  
600mm\*1200mm\*50mm



MOUNTAIN ROCK

Thickness: 10-80mm  
600mm\*1200mm\*50mm

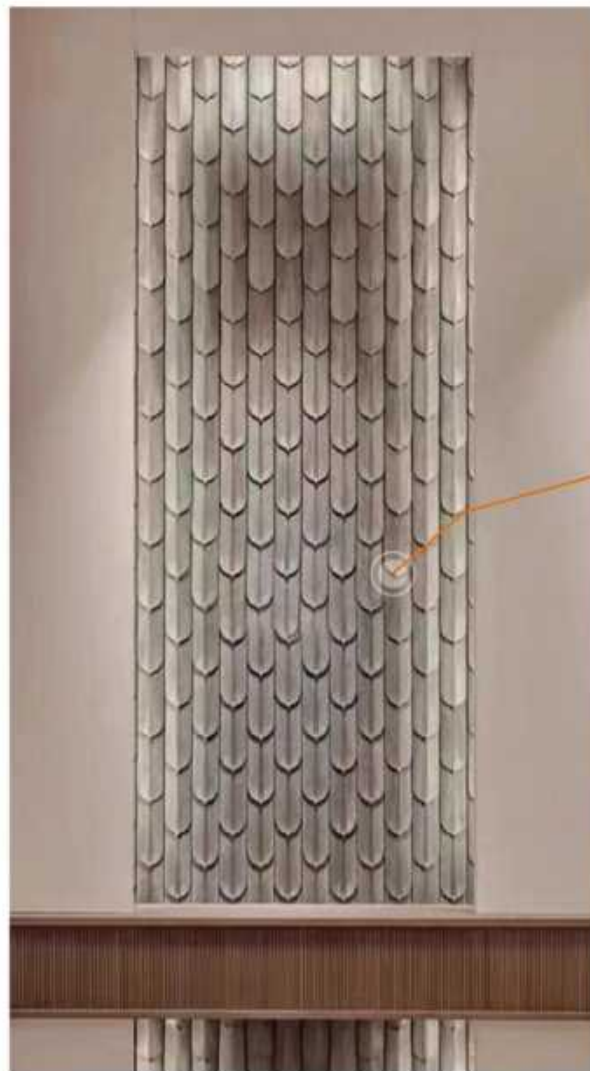

PU FEATHER STONE

Thickness: 20-50mm  
900mm\*200mm\*40mm



PU GEOMETRY SERIES


Thickness: 10-80mm  
600mm\*1200mm\*22mm




600\*1200\*22mm



600\*1200\*22mm

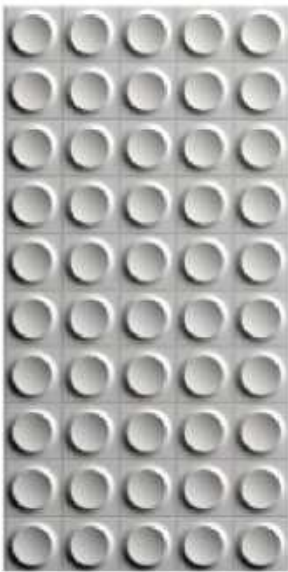

600\*1200\*22mm

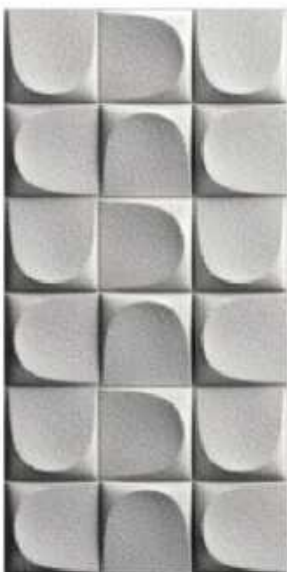

600\*1200\*35mm



600\*1200\*22mm



600\*1200\*22mm



## 08 PU Stone Panel

### Installation Method



#### ◦ Step 1

##### Cutting PU Stone Panels

Based on the measurements, use a saw to cut the PU stone panels to fit the dimensions of the installation area.



#### ◦ Step 2

##### Applying Adhesive

Evenly apply an appropriate amount of specialized adhesive to the back of the PU stone panels.



#### ◦ Step 3

##### Installing PU Stone Panels

Ensure the installation surface is clean, flat, and dry. Carefully place the PU stone panels with adhesive onto the marked positions. Press the panels firmly to ensure they adhere tightly to the installation surface.



#### ◦ Step 4

##### Nailing for Reinforcement

Use a nail gun to further secure the PU stone panels.



**SolidexWood®**

## 09 Composite Decking

### Hot-selling product series



D

SERIES

WPC Classic Decking

Affordable price, mainly composed of wood fiber and PE plastic, no co-extrusion layer, poor outdoor weather resistance, unstable performance. Short service life, easy to absorb water and oil, low stain resistance, easy to mold, crack, deform, and fade.



COLOR SELECTION

	
Grey	Dark green
	
Charcoal black	Pearl
	
Mahogany	Coffee
	
Oak	Ebony


SURFACE TEXTURE

	Stripe
	2D Wood Grain
	3D Wood Grain



CSD14025AS

W 140mm  
H 25mm  
L 2900mm

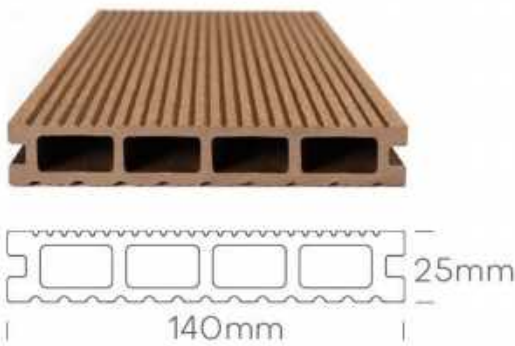


CSD14025AR

W 140mm  
H 25mm  
L 2900mm



CSD14025A

W 140mm/150mm  
H 25mm  
L 2900mm

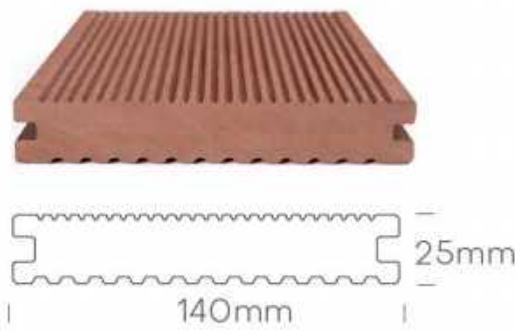

CSD14025

W 140mm  
H 25mm  
L 2900mm



CSD15025

W 150mm  
H 25mm  
L 2900mm





## WPC 3D Embossed Decking

New production technique. The 3D Embossing wood grain is much deeper than normal, it can keep long-lasting texture during applications.


### CSD14025AS-3D

W 140mm  
H 25mm  
L 2900mm



### CSD14025AR-3D

W 140mm  
H 25mm  
L 2900mm

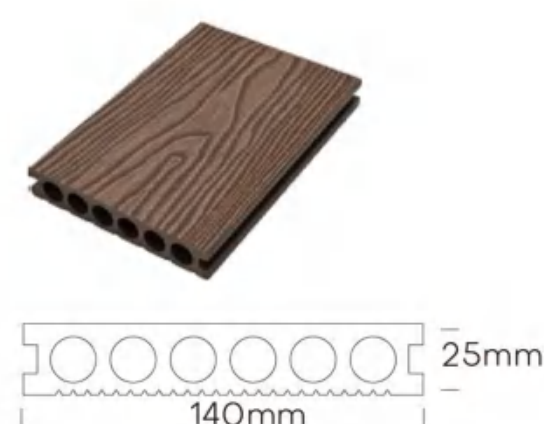



### WPC Co-extrusion Decking


WPC co-extrusion decking has a highly weather-resistant PE co-extruded layer coating, including a PE core layer and a PE co-extruded layer. It has strong outdoor weather resistance, will not absorb water or oil, has strong oil resistance, is mildew-proof, and white-soft-proof. It has rich color, resists fading, and has a long service life.

#### SURFACE TEXTURE



CSD13823B

W 138mm  
H 23mm  
L 2900mm

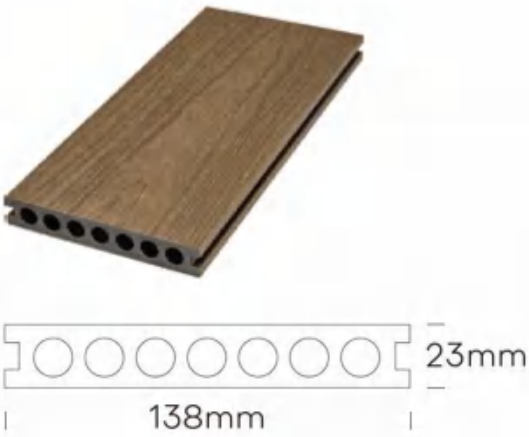


CSD14023B

W 140mm  
H 23mm  
L 2900mm



#### COLOR SELECTION

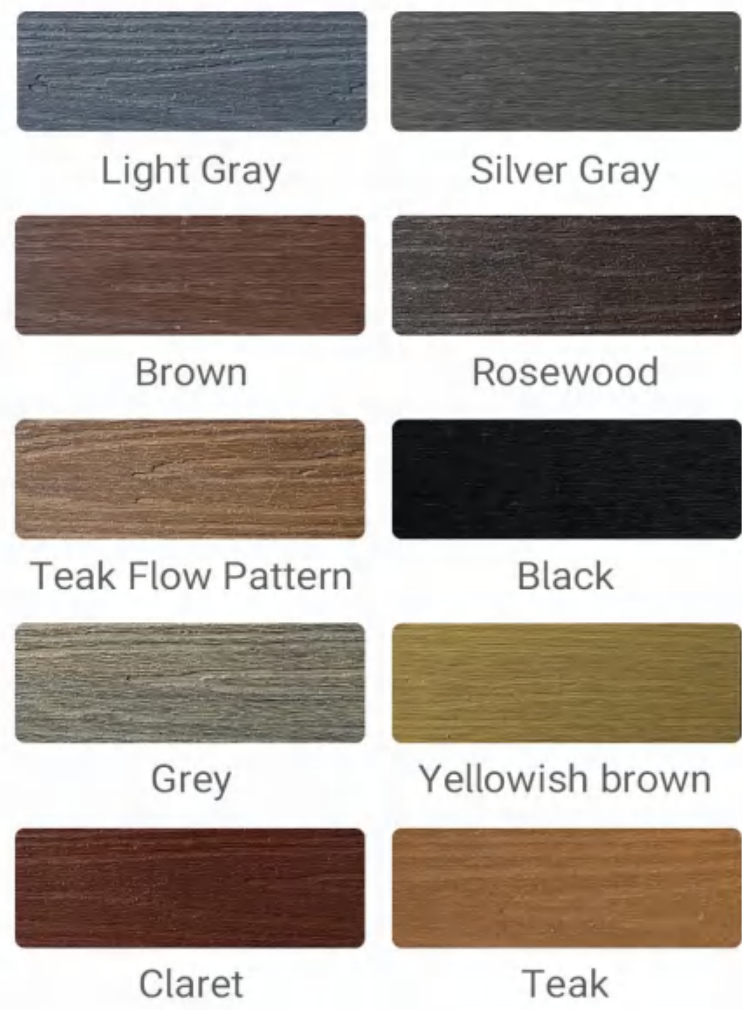



### WPC Resilient Silent Decking

WPC resilient silent decking has good quiet and anti-slip effects, and is comfortable to walk on. It also has a highly weather-resistant PE co-extrusion layer coating, including a PE core layer and a PE co-extrusion layer, which has strong outdoor weather resistance, does not absorb water or oil, has strong oil resistance, is mildew-proof, and is white and soft-proof. It has rich colors, is not easy to fade, and has a long service life.



#### COLOR SELECTION





### ASA Composite Decking


The core layer of the third generation outdoor wood plastic is PVC with micro foaming, and the co-extrusion layer uses ASA co-extrusion. The weight per meter of the product is about 40% lighter than the second generation PE co-extrusion. The weather resistance, long-term use and color stability are greatly improved compared with the second generation products. The fading rate does not exceed 5% in 15 years.

#### SURFACE TEXTURE




ASA14022R

W 140mm  
H 22mm  
L 2900mm

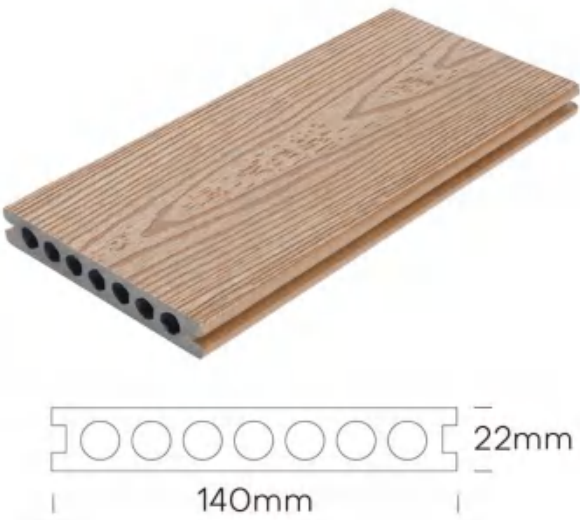

ASA14022

W 140mm  
H 22mm  
L 2900mm

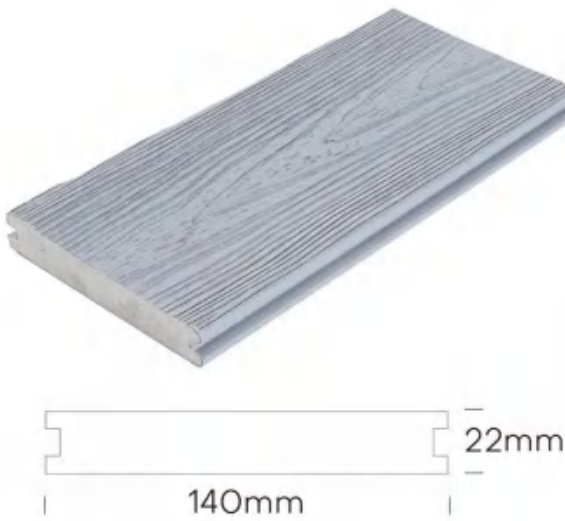

#### COLOR SELECTION

Maple	Teak
Grey	Redwood
Old Wood	Rosewood
Sandalwood	Asian Teak
Crude Wood	Black Walnut



# 09 Composite Decking

Installation Method

## • Accessories



WPC Keel



A-1




Plastic buckle




Galvanized clip


## • Installation

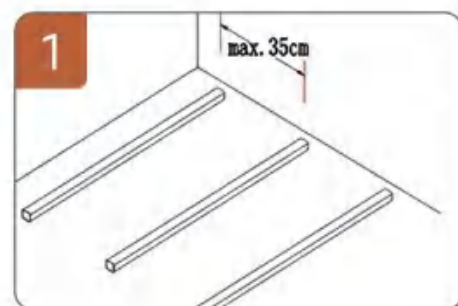


1. Install the joists, ensuring that the distance between two joists does not exceed 35 cm.

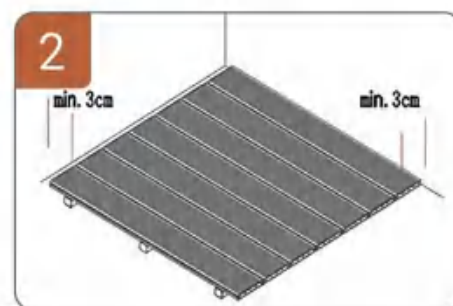


2. Leave a 3 cm gap between the decking and the building.

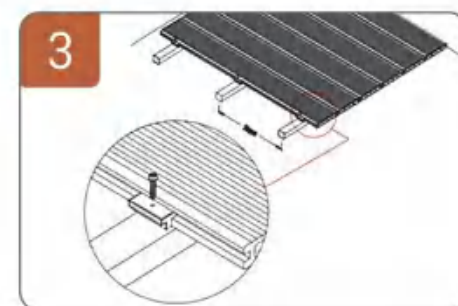


3. Secure the decking to the joists using metal fasteners.

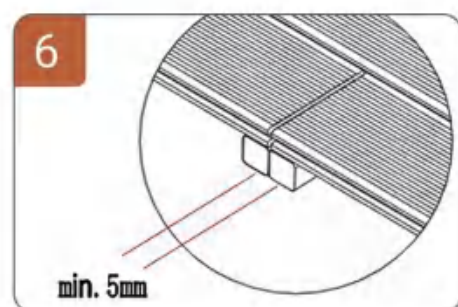


6. Ensure a gap of at least 5 mm between two decking boards.

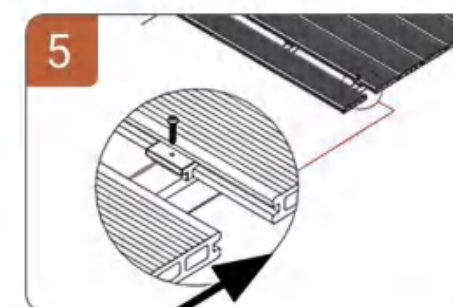


5. Connect and secure two decking boards to the joists using metal clips.

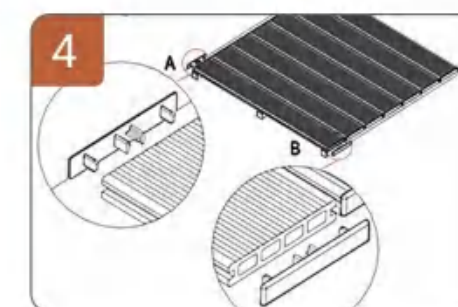

4. Seal the ends of the hollow decking boards.

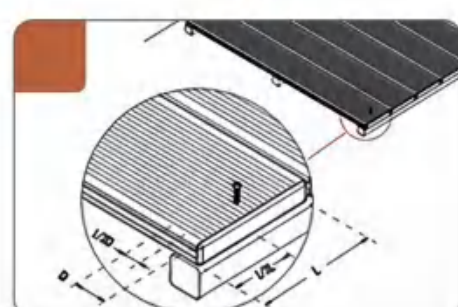


7. Fix the first and last decking boards to the surface or side using screws.

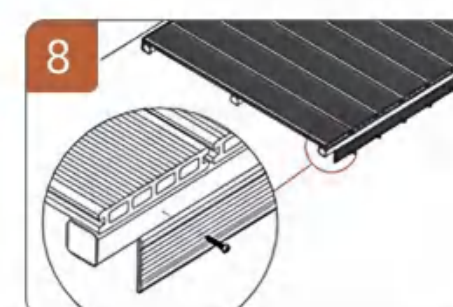

8. Install side fascia boards to finish.

# 10 Composite Cladding

Hot-selling product series

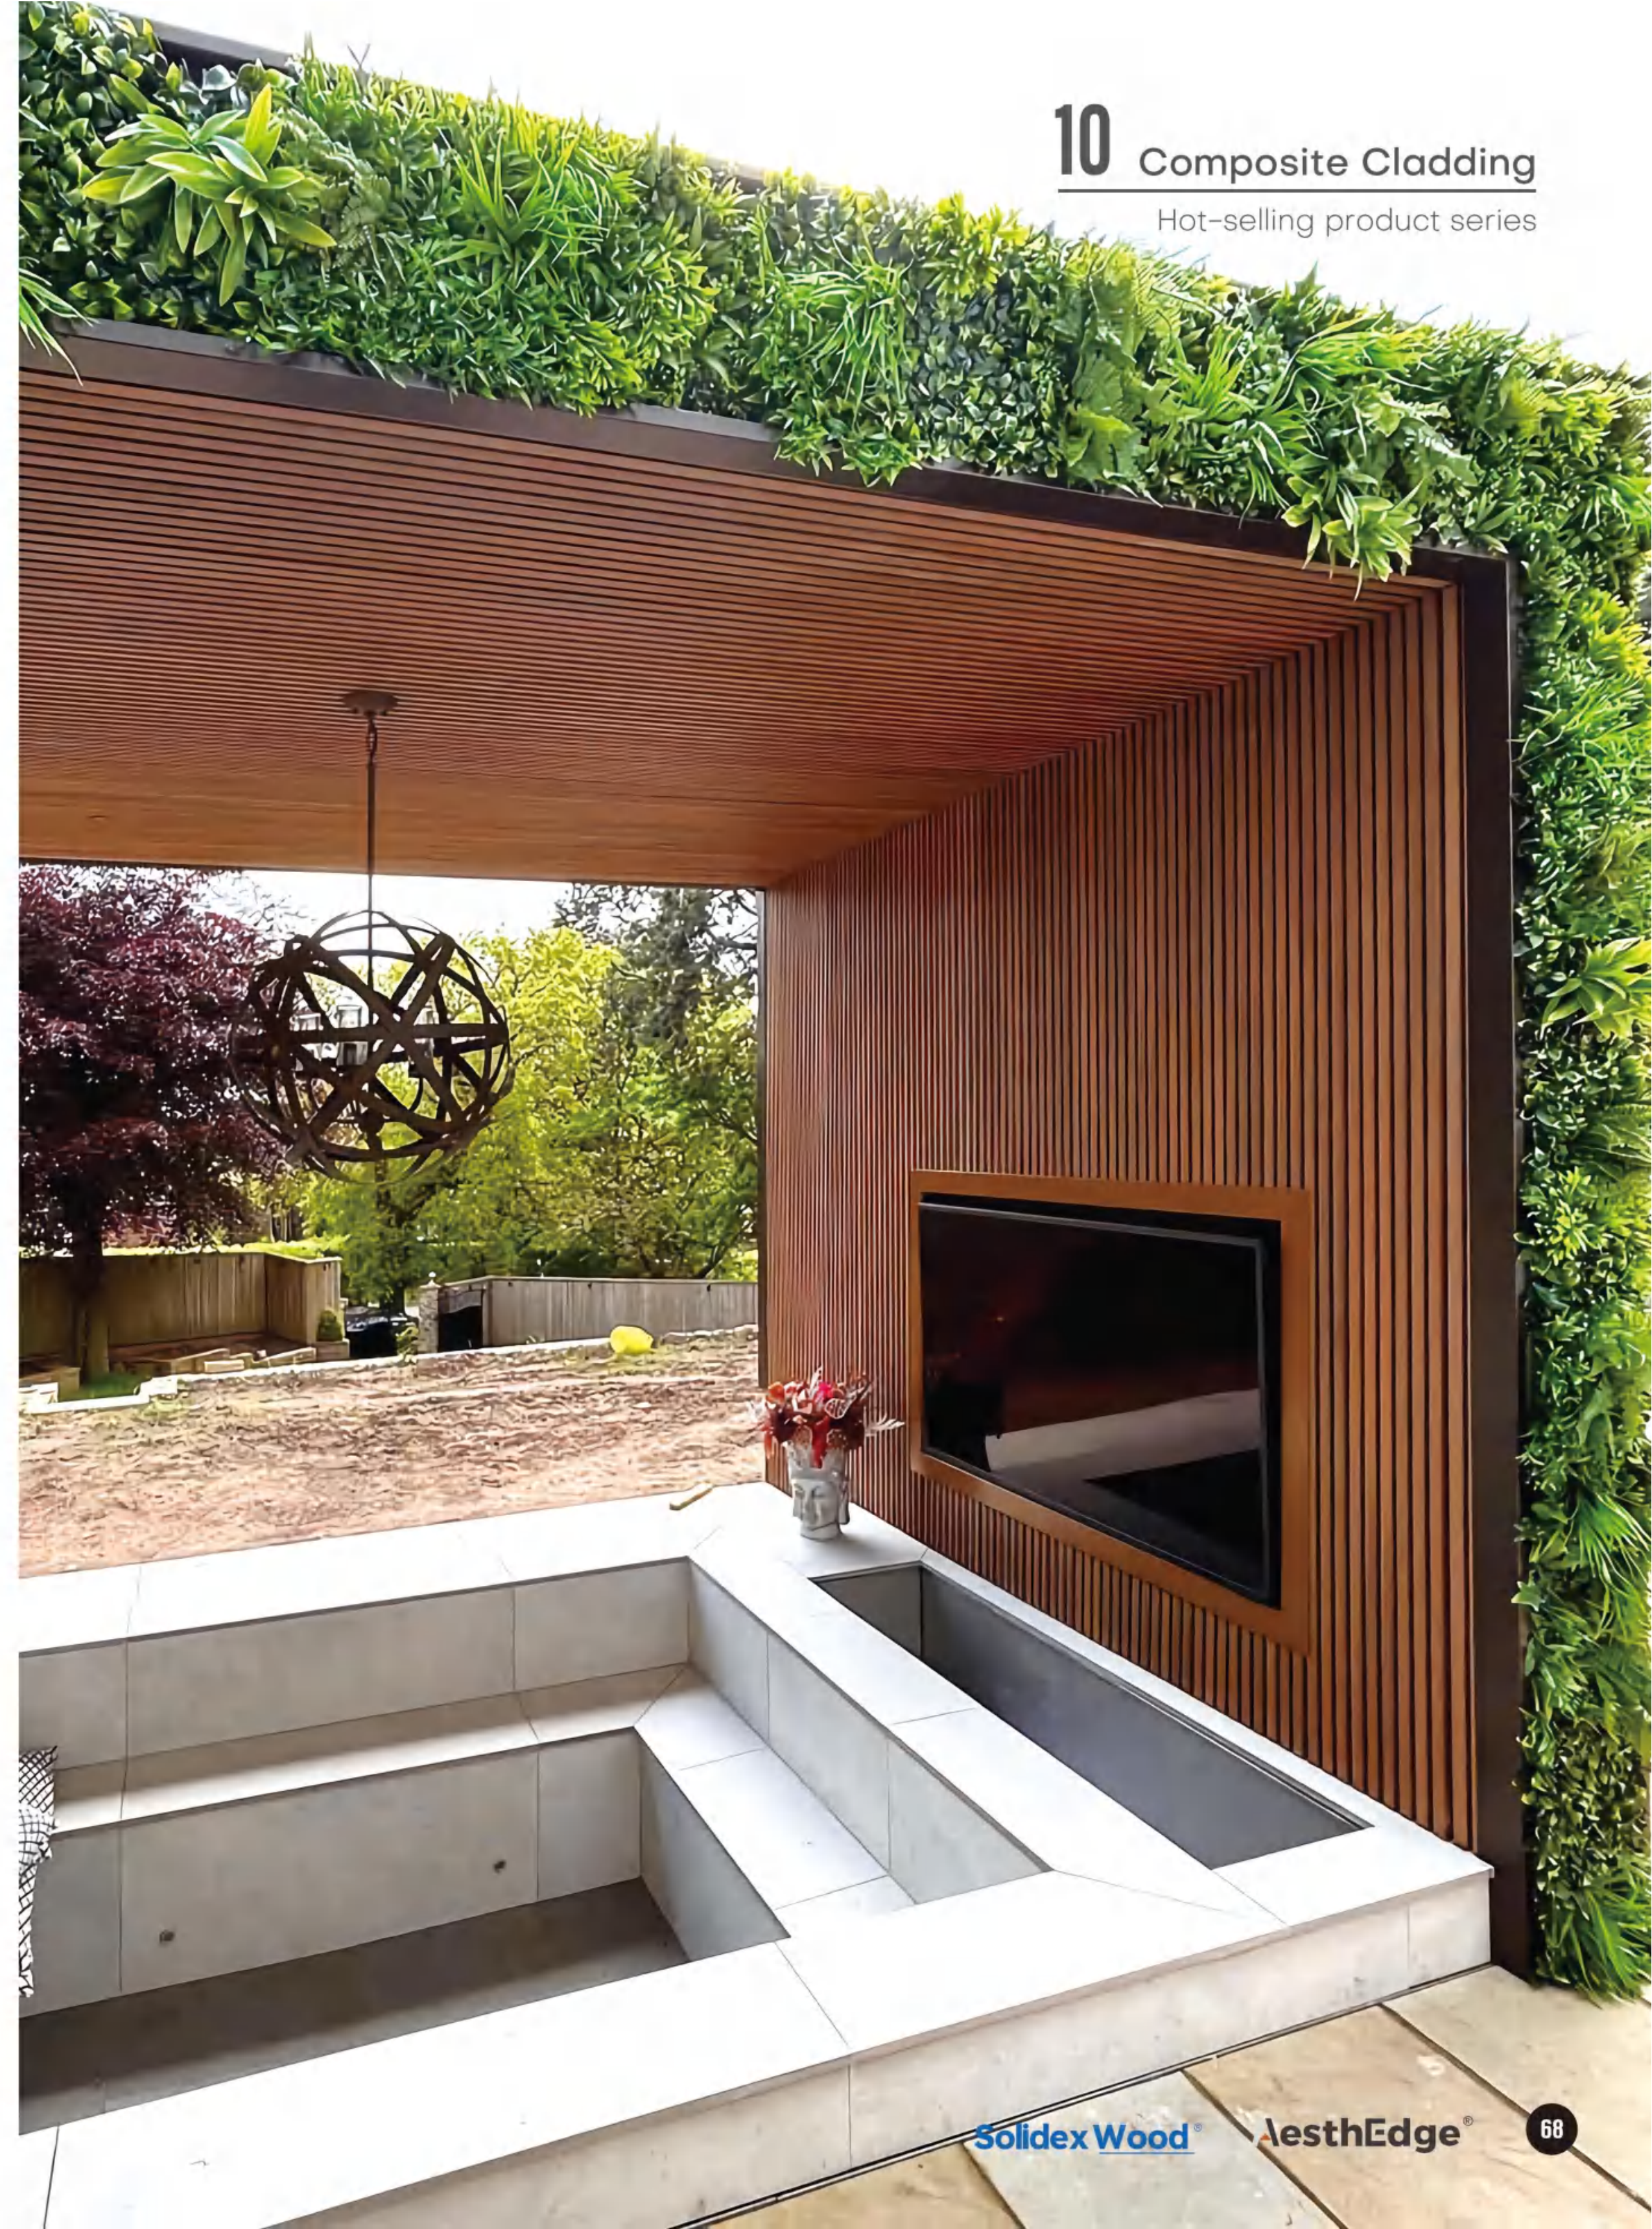



W

SERIES

WPC Classic Wall Panel




Affordable price, mainly composed of wood fiber and PE plastic, no co-extrusion layer, poor outdoor weather resistance, unstable performance. Short service life, easy to absorb water and oil, low stain resistance, easy to mold, crack, deform, and fade.



COLOR SELECTION

	
Grey	Dark green
	
Charcoal black	Pearl
	
Mahogany	Coffee
	
Oak	Ebony


SURFACE TEXTURE

	2D Wood Grain
	3D Wood Grain
	Flat



CSP22026A

W 220mm  
H 26mm  
L 2900mm

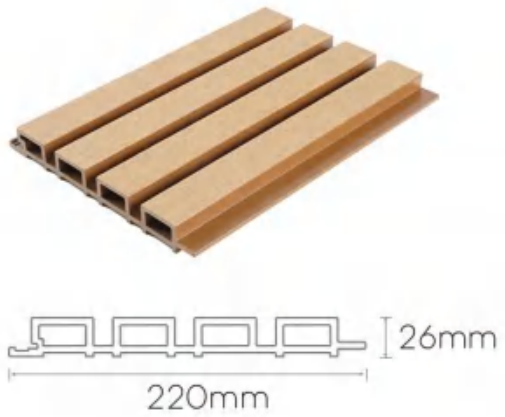

CSP14821A

W 148mm  
H 21mm  
L 2900mm



CSP15520A

W 155mm  
H 20mm  
L 2900mm





W

SERIES

WPC Co-extrusion Wall Panel

Aesthetic material style through different designs,  
easy to install, no painting undamaged by rot or insects.



Wood Grain



Embossed


CSP22026B

W 220mm  
H 26mm  
L 2900mm



CSP22026BH

W 220mm  
H 26mm  
L 2900mm

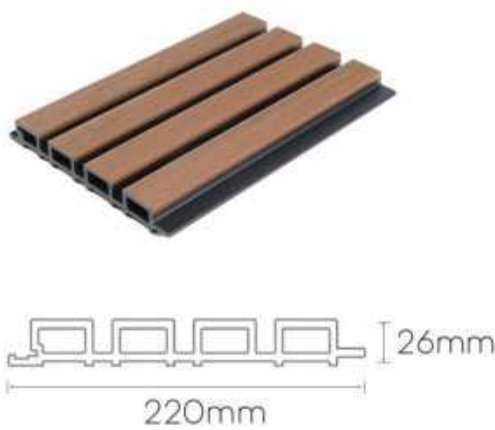

CSP17713B

W 177mm  
H 13mm  
L 2900mm



CSP15520B

W 155mm  
H 20mm  
L 2900mm



COLOR SELECTION





# 10 Composite Cladding

Hot-selling product series

## ASA Composite Cladding

The core layer of the third generation outdoor wood plastic is PVC with micro foaming, and the co-extrusion layer uses ASA co-extrusion. The weight per meter of the product is about 40% lighter than the second generation PE co-extrusion. The weather resistance, long-term use and color stability are greatly improved compared with the second generation products. The fading rate does not exceed 5% in 15 years.


### ASA21926

W 219mm  
H 26mm  
L 2900mm




### ASA19528

W 204mm  
H 28mm  
L 2900mm

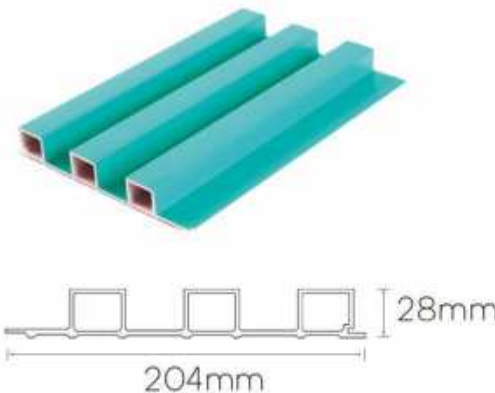


### ASA15023

W 160mm  
H 23mm  
L 2900mm

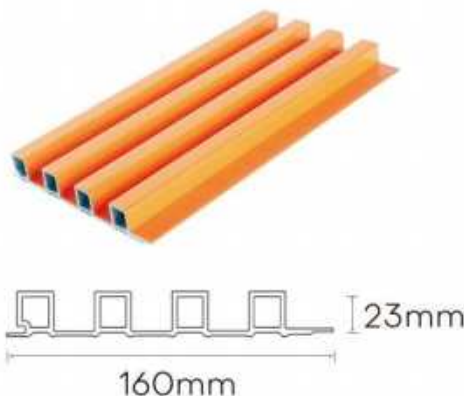


### ASA15015

W 158mm  
H 15mm  
L 2900mm

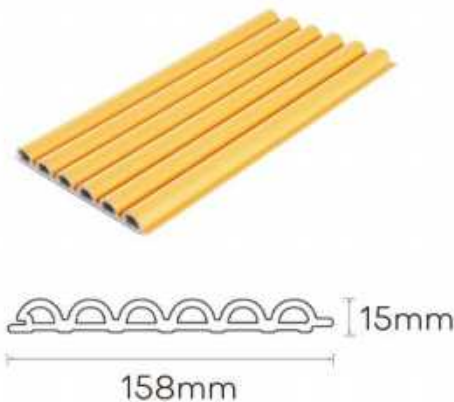


### ASA1509

W 159mm  
H 9mm  
L 2900mm

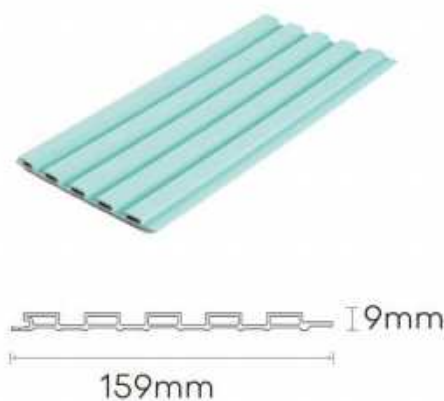

### ASA10015

W 115mm  
H 15mm  
L 2900mm

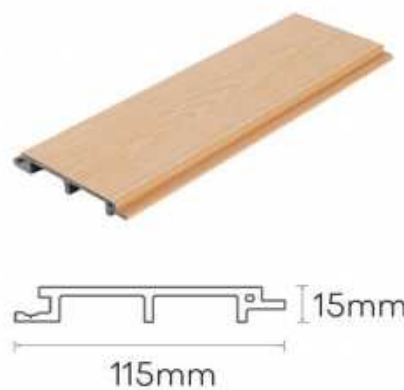

## WOOD GRAIN SELECTION



## COLOR SELECTION





# 10 Composite Cladding

Hot-selling product series

## ◦ Accessories



PJJX-1



PJFB-2



PJFB-3

## ◦ Installation



### ◦ Step 1

Fix the studs to the wall.




### ◦ Step 2

Secure the product to the studs.




### ◦ Step 3

Arrange the products in a front-to-back order.

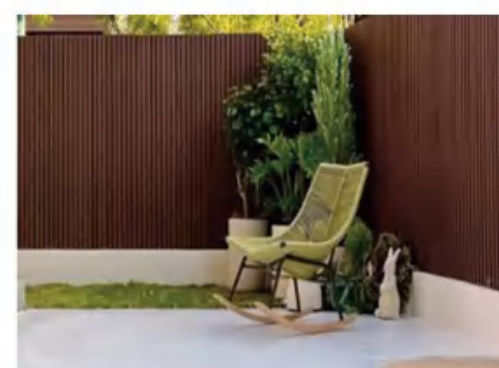

### ◦ Step 4

Installation is complete.

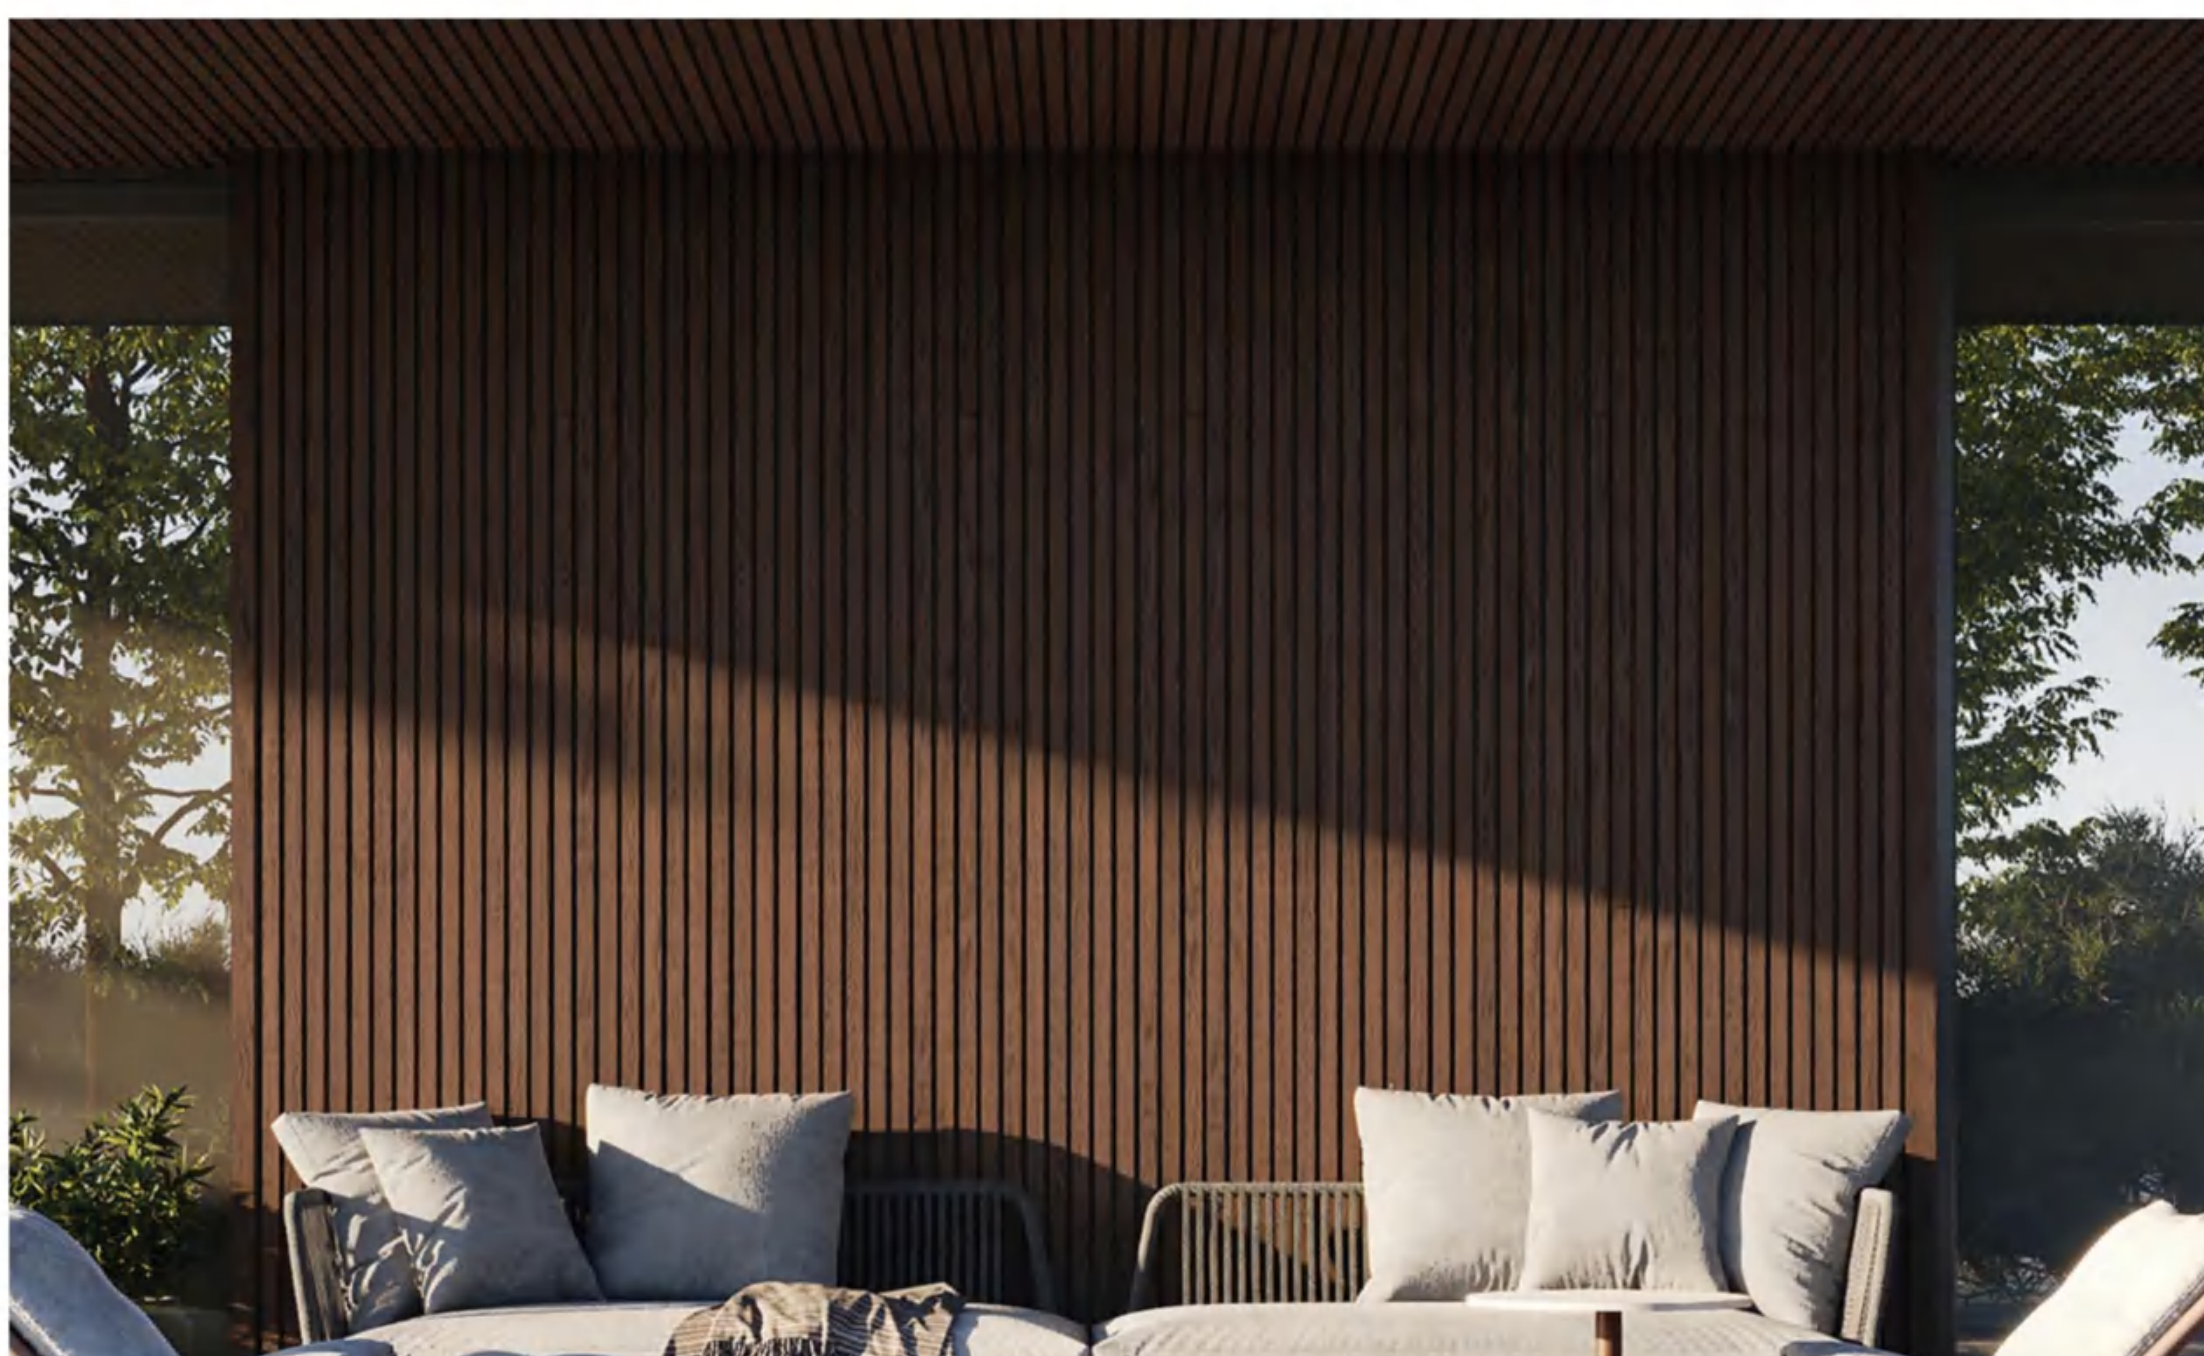



# T SERIES



## WPC Classic Timber Tube

CSP3050A




W 50mm  
H 30mm

CSP5050A




W 50mm  
H 50mm

CSP4080A




W 80mm  
H 40mm

CSP50100A



W 100mm  
H 50mm

CSP70150A



W 150mm  
H 70mm



## Co-extrusion Timber Tube

CSP5050B



W 50mm  
H 50mm

CSP50100B



W 100mm  
H 50mm





## F SERIES

### WPC Classic Fence

CSF20520

 20mm  
205mm  
W 205mm  
H 20mm  
L 2900mm



Brown



Traffic grey



Original wood

### WPC Co-extrusion Fence

CSF15720

 20mm  
157mm  
W 157mm  
H 20mm  
L 2900mm




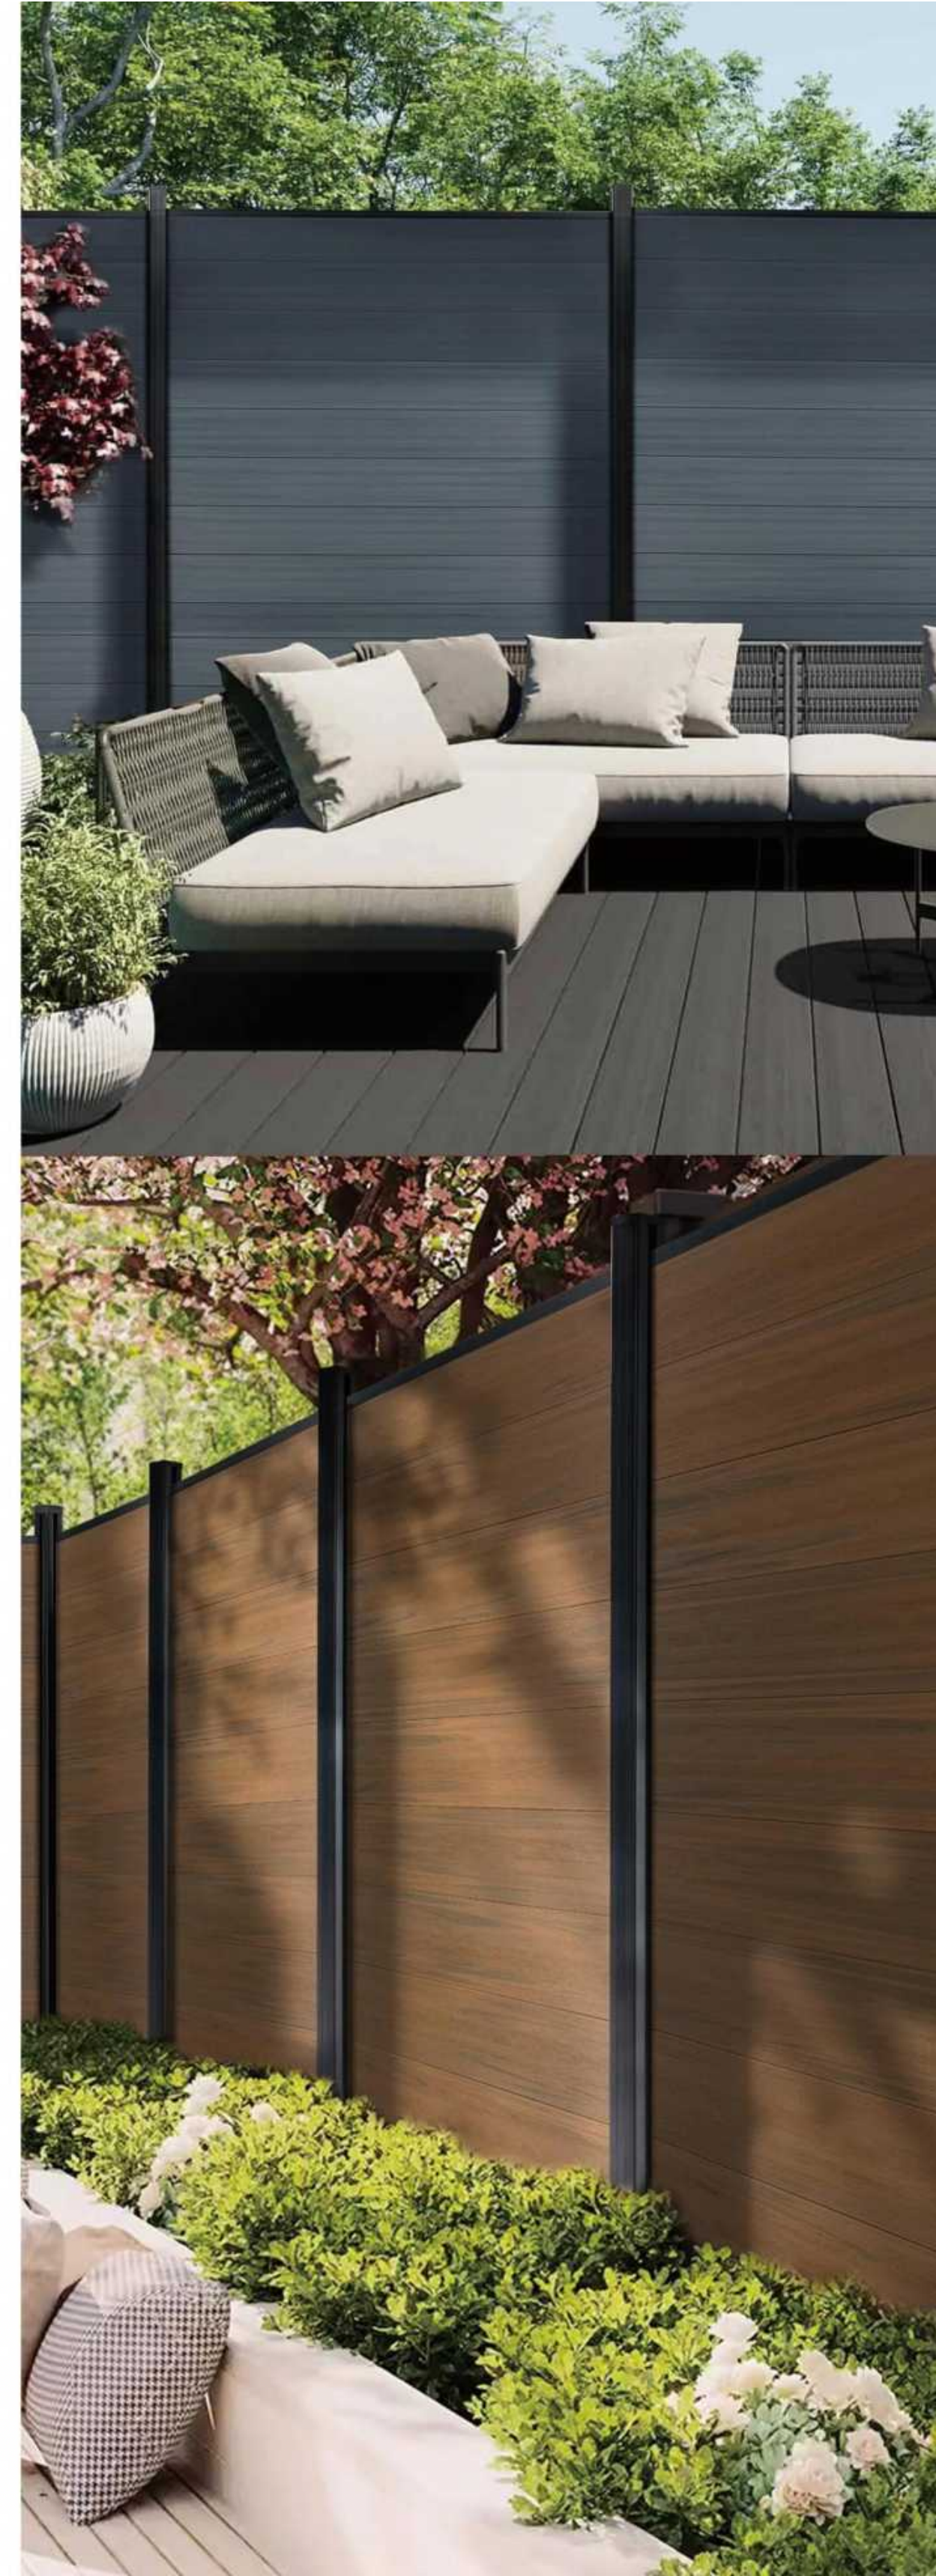
CSF9524

 24mm  
95mm  
W 95mm  
H 24mm  
L 2900mm



CSF15524

 24mm  
155mm  
W 155mm  
H 24mm  
L 2900mm



### ASA Fence


ASA15016



 16mm  
150mm

W 150mm  
H 16mm  
L 2900mm

### Accessories

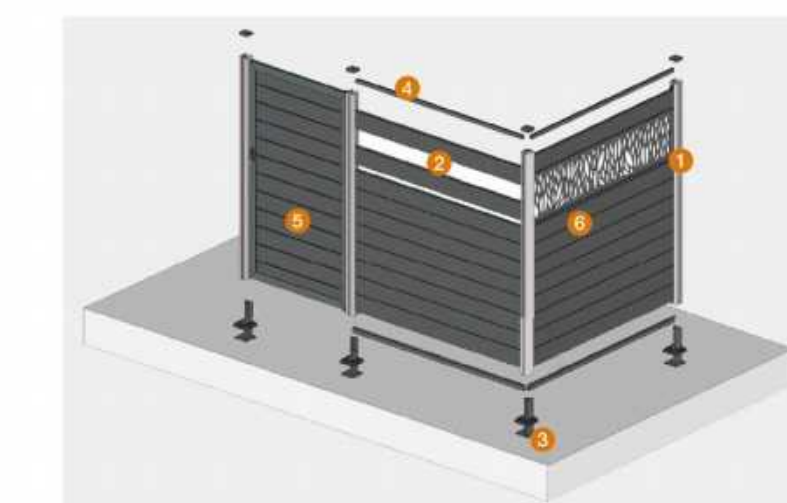

Posts



WPC fence panels



Embedded iron



Top/bottom  
edge banding



WPC doors



Grille